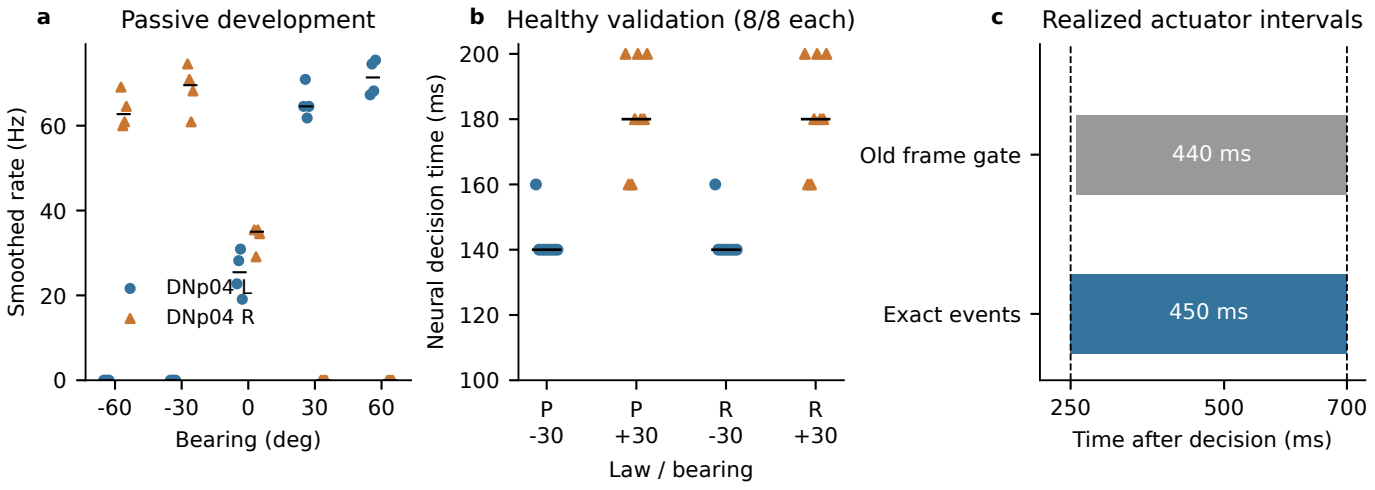
a
Passive development
Smoothed rate (Hz)
0
20
40
60
DNp04 L
DNp04 R
-60
-30
0
30
60
Bearing (deg)
b
Healthy validation (8/8 each)
Neural decision time (ms)
100
120
140
160
180
200
P
-30
P
+30
R
-30
R
+30
Law / bearing
c
Realized actuator intervals
Old frame gate
440 ms
Exact events
450 ms
250
500
700
Time after decision (ms)