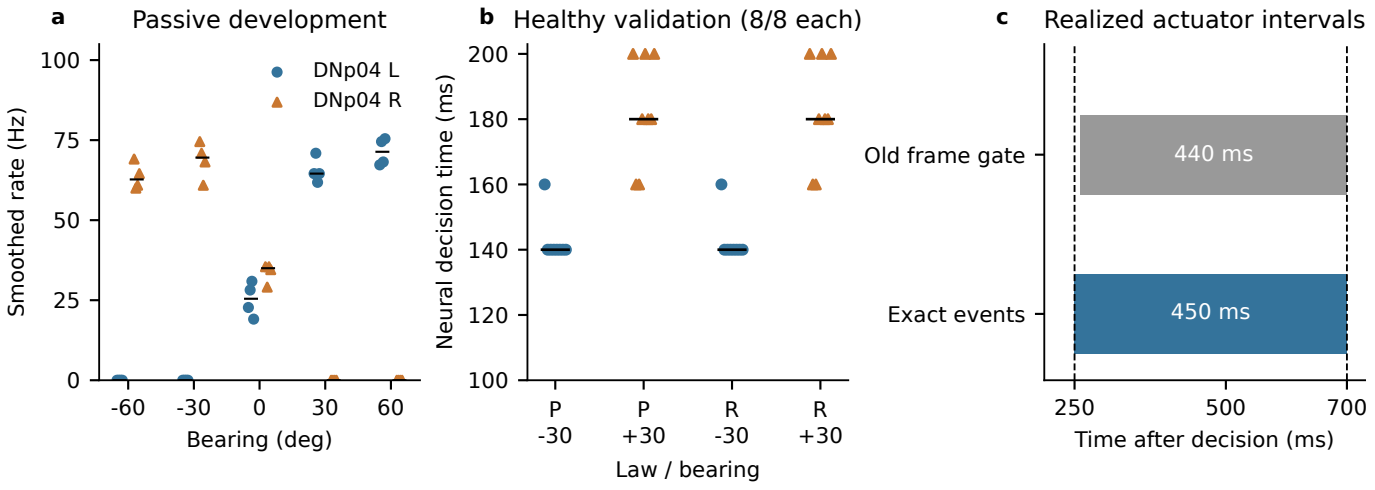
a
Passive development
DNp04 L
DNp04 R
Smoothed rate (Hz)
100
75
50
25
0
-60
-30
0
30
60
Bearing (deg)
b
Healthy validation (8/8 each)
Neural decision time (ms)
200
180
160
140
120
100
P
-30
P
+30
R
-30
R
+30
Law / bearing
c
Realized actuator intervals
Old frame gate
440 ms
Exact events
450 ms
250
500
700
Time after decision (ms)