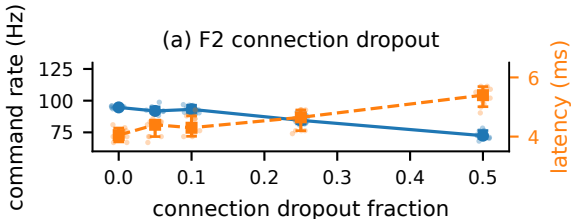
(a) F2 connection dropout
command rate (Hz)
125
100
75
latency (ms)
6
4
0.0
0.1
0.2
0.3
0.4
0.5
connection dropout fraction

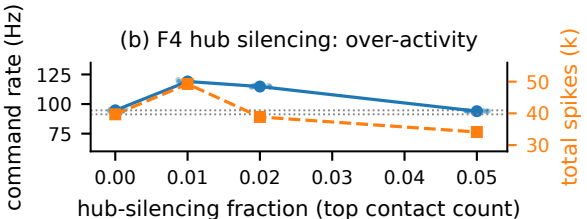
(b) F4 hub silencing: over-activity
command rate (Hz)
125
100
75
total spikes (k)
50
40
30
0.00
0.01
0.02
0.03
0.04
0.05
hub-silencing fraction (top contact count)