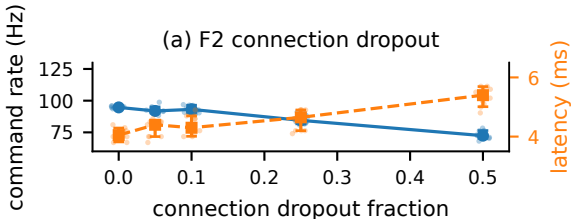
(a) F2 connection dropout
command rate (Hz)
125
100
75
6
4
latency (ms)
0.0
0.1
0.2
0.3
0.4
0.5
connection dropout fraction

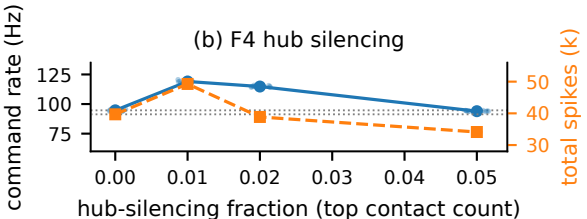
(b) F4 hub silencing
command rate (Hz)
125
100
75
50
40
30
total spikes (k)
0.00
0.01
0.02
0.03
0.04
0.05
hub-silencing fraction (top contact count)