



change thermostat 200ms

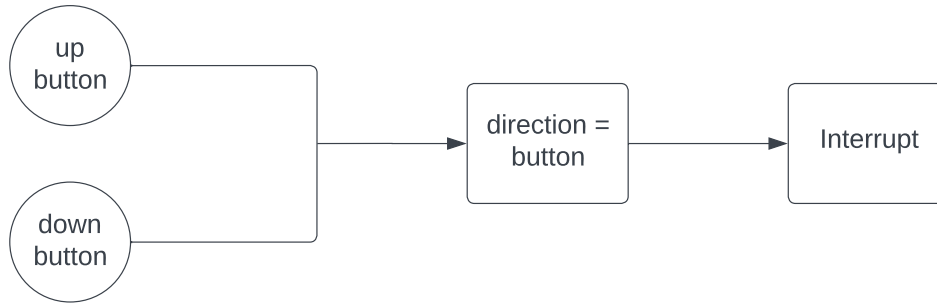

LED state 500ms

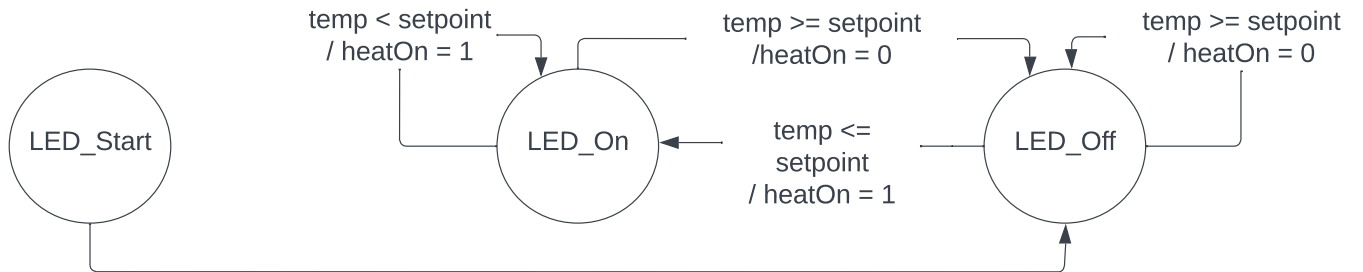

send temp 1000ms

output current temp, setpoint, heat on/off, elapsed time