



DRAGSTRIP BOOKEND TARGET v1 — PRINT AT 100% / ACTUAL SIZE

Disable fit/shrink/scale-to-page. Toner on film or paper; MATTE laminate each piece FLAT; cut on dashed lines.


FLOOR STRIP — 45x5, square 4.00 mm, marker 2.80 mm, IDs 0-111 (lies on the tank floor)

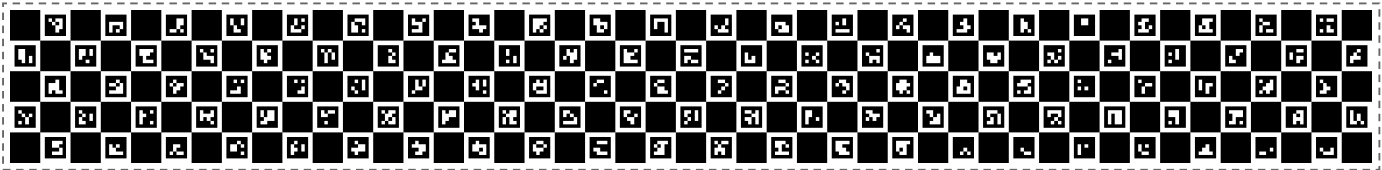



RAISED STRIP — 45x5, square 4.00 mm, marker 2.80 mm, IDs 112-223 (mounts on the spacer, parallel to the floor strip)

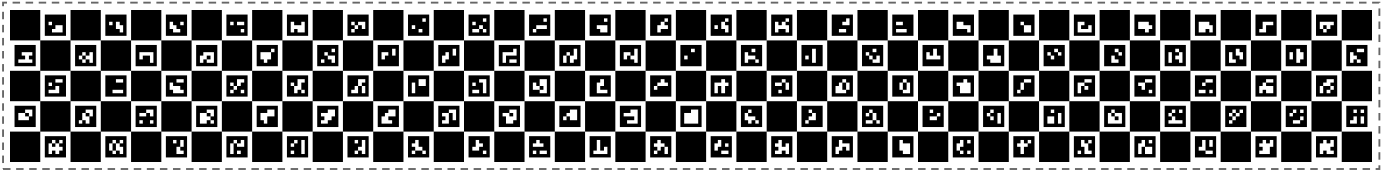

TAB A — faces cam4 (x=180 end)
5x3, sq 8.00 mm, marker 5.60 mm, IDs 230-236



TAB B — faces cam5 (x=0 end)
5x3, sq 8.00 mm, marker 5.60 mm, IDs 240-246




100 mm print-size check — measure endpoint-to-endpoint after printing: must be 100.0 mm

After laminating, confirm black stays dark in the RG830+IR view before assembling.

ASSEMBLY (side view) + THE 7 CALIPER MEASUREMENTS

END VIEW (looking along the tank) — every top camera sees BOTH heights, full length

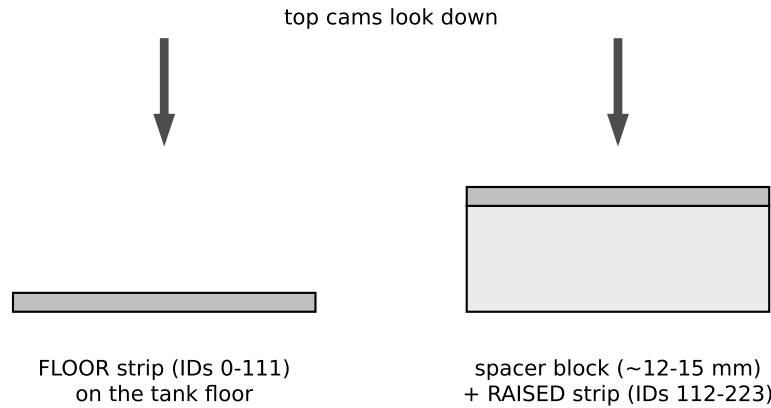

TABS: vertical at both tank ends,
pattern facing its side camera
(A→cam4 at $x=180$, B→cam5 at $x=0$)

Both strips run the FULL tank length, side by side. Mount everything RIGID (acrylic jig / epoxy). Tabs vertical, pattern outward to their camera. Then measure with calipers:

- M1 raised-strip height: floor-strip top surface -> raised-strip top surface [mm]
- M2 lateral gap: floor-strip pattern edge ($y=20$) -> raised-strip pattern edge, across the tank [mm]
- M3 lengthwise shift between the two strips' $x=0$ pattern corners (0 if flush) [mm]
- M4 TAB A: horizontal gap from floor-strip $x=180$ pattern edge to tab A pattern plane [mm]
- M5 TAB A: height of tab pattern's BOTTOM edge above the floor-strip top surface [mm]
- M6 TAB A: sideways offset of tab pattern's left edge from the floor-strip $y=0$ edge [mm]
- M7-M9 TAB B: same three as M4-M6 on the cam5 ($x=0$) end [mm]

Enter the numbers into `assembly_measurements.json` (template beside this PDF); the solver consumes it directly.
Then: submerge once, capture ~30 synced frames on all six cameras, run the calibration scripts — no clicking, no board movement, focal refinement included.