




PARTNER

# NEW FROM SOLAX X3-FORTH

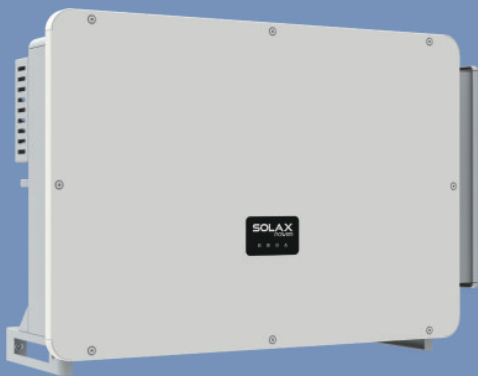

## X3-FORTH

75kW/80kW/100kW/110kW  
120kW/125kW/136kW/150kW

## Features

### More energy harvest

- Maximum efficiency up to 99%
- 180~1000Vdc MPPT voltage range
- Maximum 12 MPPTs, 2 strings per MPP tracker
- 150% PV oversizing input, 110% overloading output
- Maximum 32A MPPT current

### Safety & Reliability

- IP66 protection level
- AFCI protection (Optional)
- AC terminal temperature detection
- Both AC&DC SPDs(Type II) inside, Type I+II SPD is optional

### Intelligence for easy maintenance and economy

- Built-in export power control
- Remote setting and upgrading
- 24 hours operation monitoring
- Smart I-V Curve Diagnosis supported
- Night-time reactive power compensation
- Aluminium AC cable connection available
- Power line communication (PLC)(Optional)
- Fuse free design with smart string current monitoring
- Smart air cooling technique results in long lifetime of fans
- Advanced heat dissipation technology makes the system more than 5% lighter and smaller

### Contact Us for More Information

[www.solaxpower.com](http://www.solaxpower.com)

AU: +61 1300 476529

DE: +49 6142 4091664

Global: +86 571-56260008

UK: +44 2476 586998

NL: +31 (0) 852 737932

[info@solaxpower.com](mailto:info@solaxpower.com)  
[service@solaxpower.com](mailto:service@solaxpower.com)



# X3-FORTH (THREE PHASE)

X3-FTH-75K X3-FTH-80K X3-FTH-100K X3-FTH-110K X3-FTH-120K X3-FTH-125K X3-FTH-136K-MV X3-FTH-150K-MV

## DC INPUT

|                                                   |          |         |                   |                   |         |         |         |         |
|---------------------------------------------------|----------|---------|-------------------|-------------------|---------|---------|---------|---------|
| Max. PV input power [kWp]                         | 120      | 120     | 150               | 165               | 180     | 188     | 204     | 225     |
| Max. PV input voltage [V] <sup>①</sup>            | 1100     |         |                   |                   |         |         |         |         |
| Nominal input voltage [V] <sup>②</sup>            | 580/600  | 580/600 | 580/600           | 580/600           | 580/600 | 580/600 | 730/785 | 730/785 |
| Start-up voltage [V]                              | 200      |         |                   |                   |         |         |         |         |
| MPPT voltage range [V] <sup>③</sup>               | 180-1000 |         |                   |                   |         |         |         |         |
| No. of MPP trackers                               | 9        | 9       | 9/12 <sup>④</sup> | 9/12 <sup>④</sup> | 12      | 12      | 12      | 12      |
| Strings per MPP tracker                           | 2        |         |                   |                   |         |         |         |         |
| Max. PV input current per MPPT [A]                | 32       |         |                   |                   |         |         |         |         |
| Max. input short circuit current Isc per MPPT [A] | 46       |         |                   |                   |         |         |         |         |

## AC OUTPUT

|                                               |                            |             |             |             |           |             |                |             |
|-----------------------------------------------|----------------------------|-------------|-------------|-------------|-----------|-------------|----------------|-------------|
| Rated AC output power [kW]                    | 75                         | 80          | 100         | 110         | 120       | 125         | 136            | 150         |
| Rated AC output current [A]②                  | 113.7/108.7                | 121.3/116   | 151.6/145   | 166.7/159.5 | 181.9/174 | 189.4/181.2 | 157.1/145.4    | 173.2/160.4 |
| Max. AC output apparent power [kVA]           | 75                         | 88          | 110         | 121kW       | 132kW     | 132         | 149.6kW        | 165kW       |
| Max. AC output current [A]②                   | 113.7/108.7                | 133.4/127.6 | 166.7/159.5 | 183.4/175.4 | 200/191.3 | 200/191.3   | 172.8/160      | 190.6/176.5 |
| Nominal AC voltage [V]                        | 220/380, 230/400,3W/(N)/PE |             |             |             |           |             | 500/540, 3W/PE |             |
| AC voltage range [V]⑤                         | 304 ~ 480                  |             |             |             |           |             | 425 ~ 594      |             |
| Nominal AC frequency/AC frequency range [Hz]⑤ | 50/60; ±5                  |             |             |             |           |             |                |             |
| THDi (Rated power) [%]                        | <3                         |             |             |             |           |             |                |             |
| Adjustable power factor range                 | 0.8 leading ~ 0.8 lagging  |             |             |             |           |             |                |             |

## SYSTEM DATA

|                                          |                                   |      |      |      |      |      |      |      |
|------------------------------------------|-----------------------------------|------|------|------|------|------|------|------|
| Max. Efficiency [%]                      | 98.6                              | 98.6 | 98.6 | 98.6 | 98.6 | 98.6 | 99.0 | 99.0 |
| European weighted efficiency [%]         | 98.3                              |      |      |      |      |      | 98.5 |      |
| Ingress protection                       | IP66                              |      |      |      |      |      |      |      |
| Operating ambient temperature range [°C] | -25 ~ +60                         |      |      |      |      |      |      |      |
| Max. operation altitude [m]              | 4000                              |      |      |      |      |      |      |      |
| Relative humidity [%]                    | 0 ~100                            |      |      |      |      |      |      |      |
| Dimensions (WxHxD) [mm]                  | 985*660*327.5                     |      |      |      |      |      |      |      |
| Weight [kg]                              | 83                                | 83   | 83   | 83   | 87   | 87   | 87   | 87   |
| Cooling concept                          | Smart fan cooling                 |      |      |      |      |      |      |      |
| Communication interfaces                 | RS485 / USB / DRM / PLC(Optional) |      |      |      |      |      |      |      |
| Optional monitoring dongle               | Pocket WiFi/LAN/4G                |      |      |      |      |      |      |      |
| Display                                  | LCD(16x2, optional)/LEDx4         |      |      |      |      |      |      |      |

## PROTECTION

|                                         |                   |
|-----------------------------------------|-------------------|
| Over/under voltage protection           | YES               |
| DC isolation protection                 | YES               |
| Grid monitoring                         | YES               |
| DC injection monitoring                 | YES               |
| Residual current detection              | YES               |
| Anti-islanding protection               | YES               |
| String fault detection                  | YES               |
| SPD (DC/AC)                             | Type II / Type II |
| Arc-fault circuit interrupter(AFCI)     | Optional          |
| AC terminals over temperature detection | YES               |
| AC auxiliary power supply(APS)          | Optional          |
| Power line communication(PLC)           | Optional          |

## STANDARD

|               |                                                                                                                                                               |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety        | IEC/EN 62109-1; IEC/EN 62109-2; NB/T 32004                                                                                                                    |
| EMC           | IEC/EN 61000; NB/T 32004                                                                                                                                      |
| Certification | EN 50549; AS4777.2; VDE4105; IEC 61727; IEC 62116; IEC 61683; IEC 60068; EN 50530; NB/T 32004; NRS097; G99; RD1699; PPDS; CE10-21; CE10-16; VFR 2019; VDE4110 |

① The maximum input voltage represents the highest DC voltage threshold for the inverter, approaching which power derating occurs and any further increase might lead to potential damage to the inverter.  
 ② The two data refer to different grid voltage 220V/230V(75~125kW models) or 500V/540V(136~150kW models).  
 ③ Please refer to the user manual for the MPPT voltage range at full load condition. PV voltage out of the full load MPPT range will trigger the inverter derating protection or possibly cause damage to the inverter if it exceeds the Max. input voltage.  
 ④ 9/12MPPTs is optional for 100kW and 110kW models.  
 ⑤ The AC voltage and the frequency range may vary from different country codes.