


NEW FROM SOLAX

X3-GRAND HV

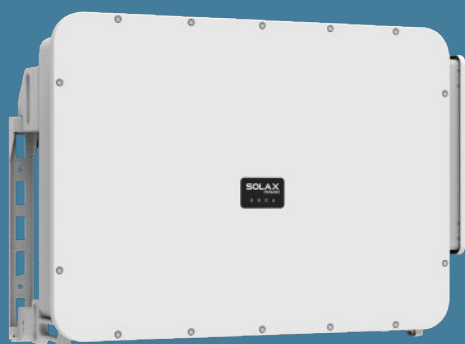

X3-GRAND HV
300kW / 320kW
333kW / 350kW

Features

More energy harvest

- Maximum efficiency up to 99%
- 460~1500 Vdc MPPT voltage range
- Maximum 6 MPPTs, 5 strings per MPP tracker
- Maximum 75A MPPT current

Safety & Reliability

- IP66 protection level and NEMA4X for US
- AFCI protection (Optional)
- AC terminal temperature detection
- Both AC&DC SPDs(Type II) inside, Type I+II SPD is optional

Intelligence for easy maintenance and economy

- Built-in export power control
- Remote setting and upgrading
- 24 hours operation monitoring
- Power line communication(PLC)(Optional)

Contact Us for More Information

www.solaxpower.com

AU: +61 1300 476529

DE: +49 6142 4091664

Global: +86 571-56260008

UK: +44 2476 586998

NL: +31 (0) 852 737932

info@solaxpower.com
service@solaxpower.com



DC Input

Max. PV input voltage	1500V			
Nominal input voltage	1080V			
Start-up voltage	500V			
MPPT voltage range	460~1500V			
Max. PV input current per MPPT	75A			
Max. input short circuit current Isc per MPPT	115A			
No. of MPP trackers	6			
Strings per MPP tracker	5			

AC Output

Rated AC output power	300kVA	320kVA	333kVA	352kVA
Rated AC output current	216.6A	231A	240A	254A
Max. AC output apparent power	330kVA	352kVA	333kVA	352kVA
Max. AC output current	238.2A	254A	254A	254A
Nominal AC voltage	3W+PE,800V	3W+PE,800V	3W+PE,800V	3W+PE,800V
AC voltage range	640-920V	640-920V	640-920V	640-920V
Nominal AC frequency	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz
Power Factor range	>0.99 (0.8 leading-0.8 lagging)	>0.99 (0.8 leading-0.8 lagging)	>0.99 (0.8 leading-0.8 lagging)	>0.99 (0.8 leading-0.8 lagging)
THDi (Rated power)	<1%	<1%	<1%	<1%

EFFICIENCY

Max. efficiency	99%			
European weighted efficiency	98.80%			

GENERAL

Dimensions (WxHxD)	1145.5*806*405mm			
Net weight	<120kg			
Topology	Transformerless			
Standby consumption (night)	<15W			
Operating ambient temperature range	-30 ~ +60°C			
Relative humidity	0-100%			
Ingress protection	IP66 / NEMA4X			
Cooling concept	Smart fan-cooling			
Max. operation altitude	4000m			
DC connection	MC4 (Max.6 mm2)			
AC connection	OT/DT terminal(Max.400 mm2)			
Display	LED, LCD(Optional), APP			
Communication	RS485/USB/(Optional: WiFi/LAN/4G/PLC)/DI/Sunspec/2030.5/Modbus_RTU/Modbus_TCP			

PROTECTION

DC switch	Yes			
DC reverse protection	Yes			
Over current protection	Yes			
Over voltage protection	Yes			
Anti-islanding protection	Yes			
SPD (DC/AC)	Type II (Optional: Type I+II)			
Arc-fault circuit interrupter(AFCI)	Optional			
AC terminals over temperature detection	Yes			
Nighttime SVG	Yes			
Fan self-cleaning	Yes			
AC auxiliary power supply(APS)	Yes			
Power line communication(PLC)	Optional			