

VMT Configuration

- 1) Insert the touch screen heater into the vehicle dock, as it provides the main power to the touch screen
- 2) Power on the touch screen heater
- 3) Skip the on-screen instructions




- 4) Configure the screen timeout settings.



5) Connect the scanner to the touch screen



6) Ensure the heater is turned on and functioning properly

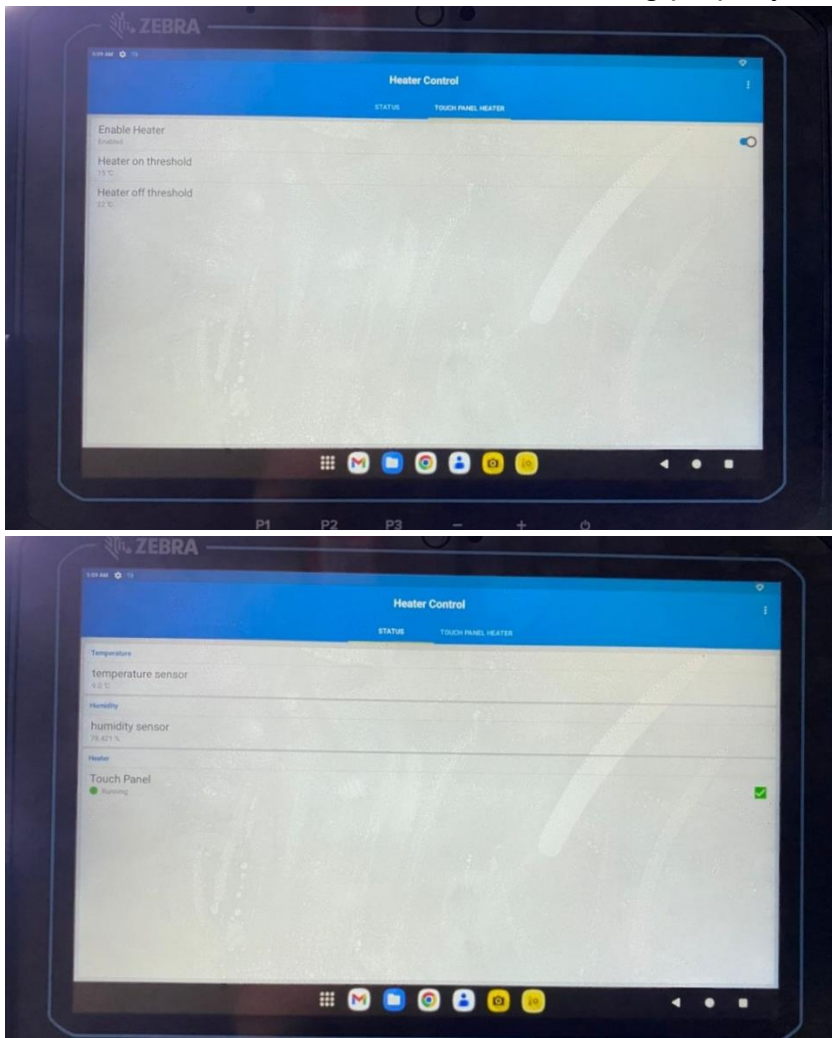

7) The VMT able to power up and ready to use

