
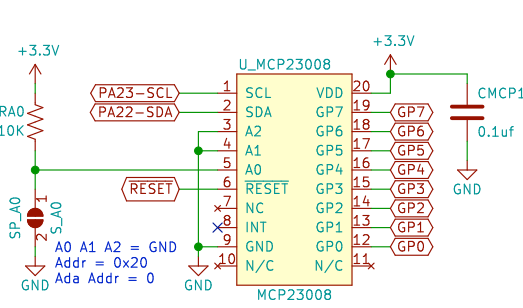
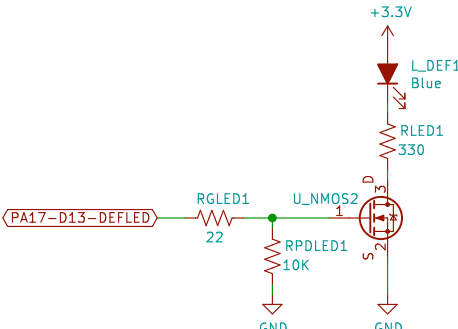



Power (Wall Jack, USB, Off board)

Power LED






Default LED

MCP23008

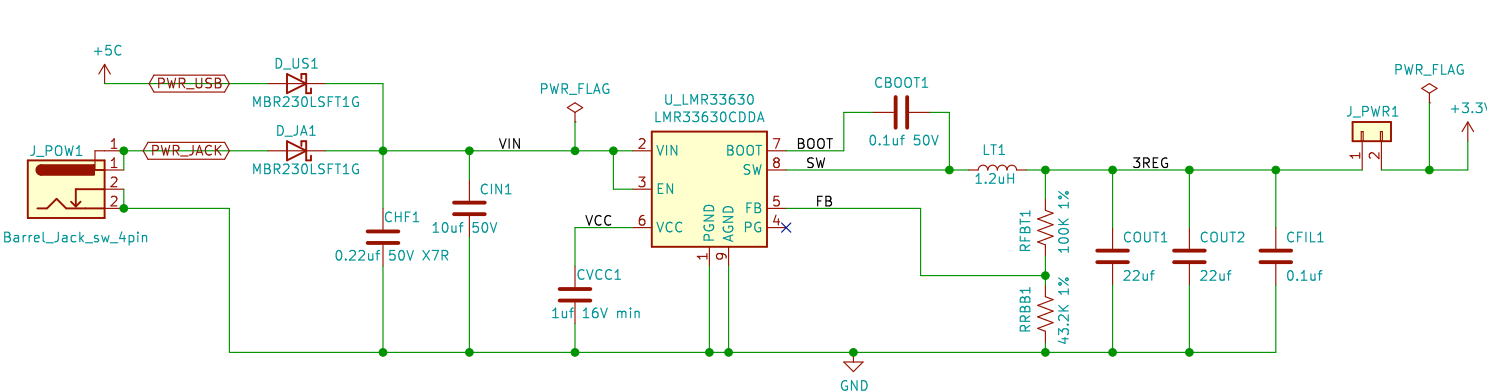

USB

CPU ATSAM21G18A

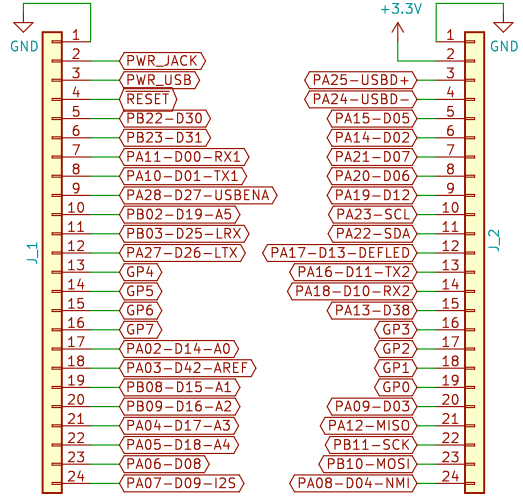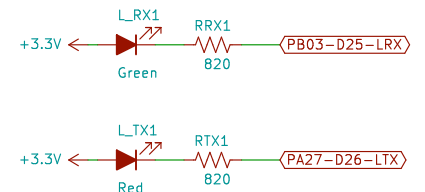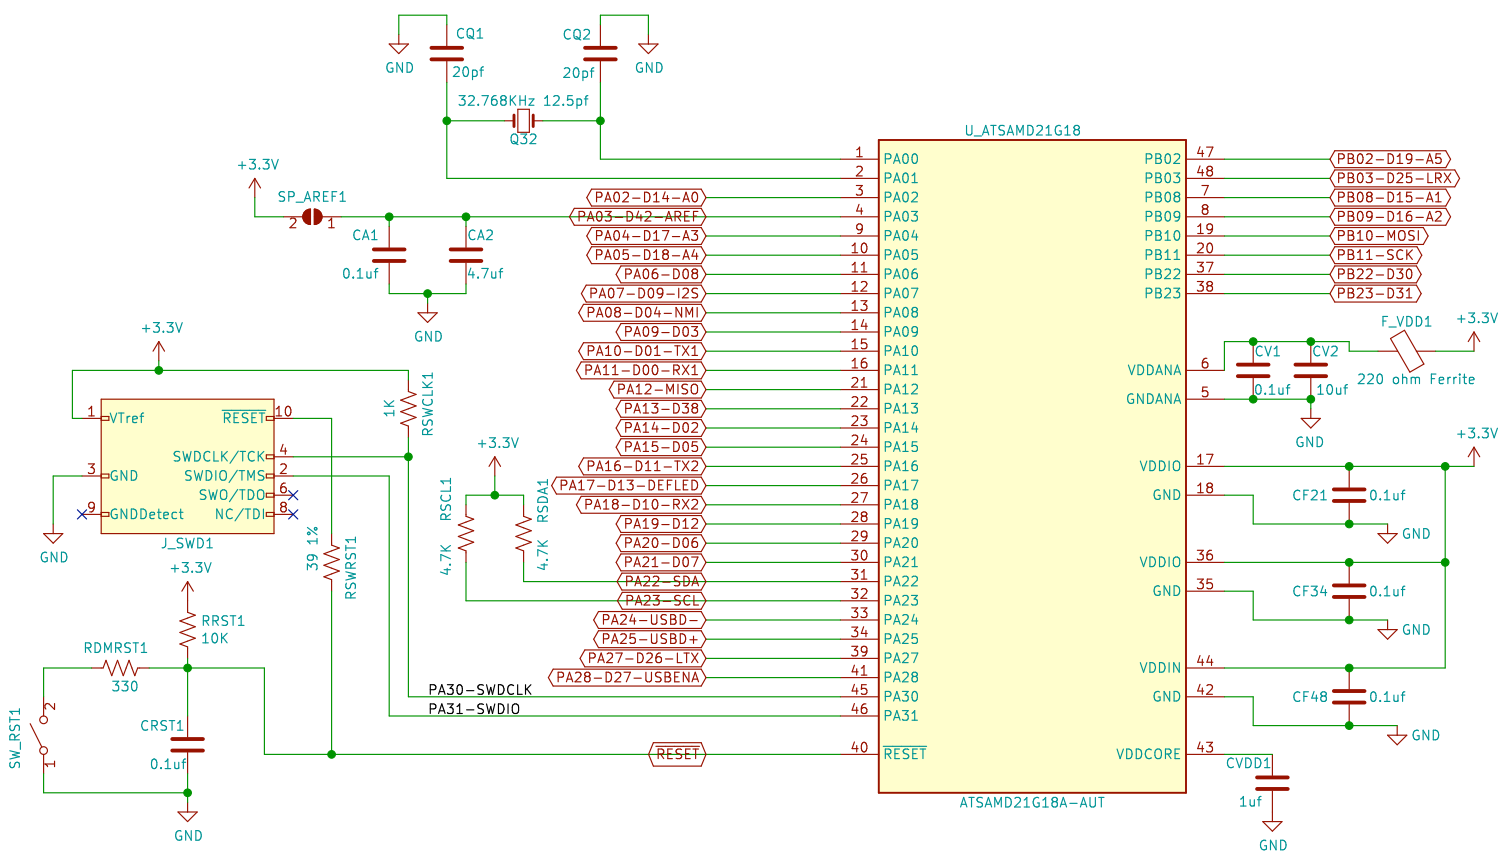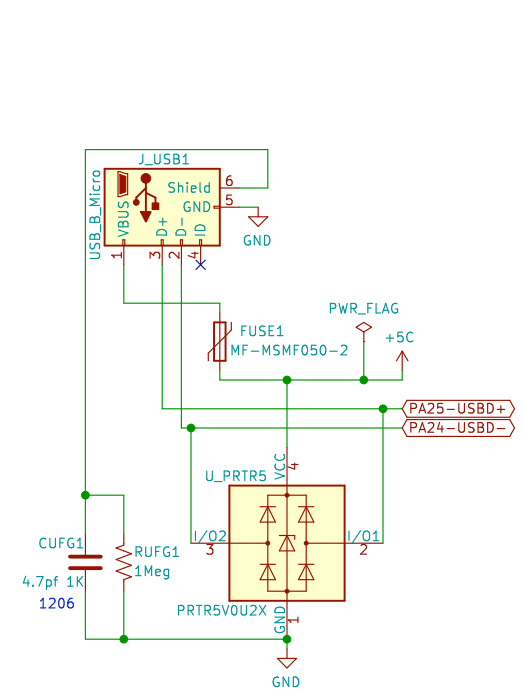

Copyright S. Cooper 2021.
You may redistribute and modify this documentation under the terms of the CERN OHL v1.2.
This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY,
INCLUDING OF MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE.
Please see the CERN OHL v1.2 for applicable conditions. (<http://ohwr.org/cernohl>).

Sheet: /		
File: MiniZ21G18_v4b.sch		
Title: MiniZ21G18		
Size: User	Date: 2021-04-02	Rev: 4b
KiCad E.D.A. kicad (5.1.8-0-10.14)		Id: 1/1