
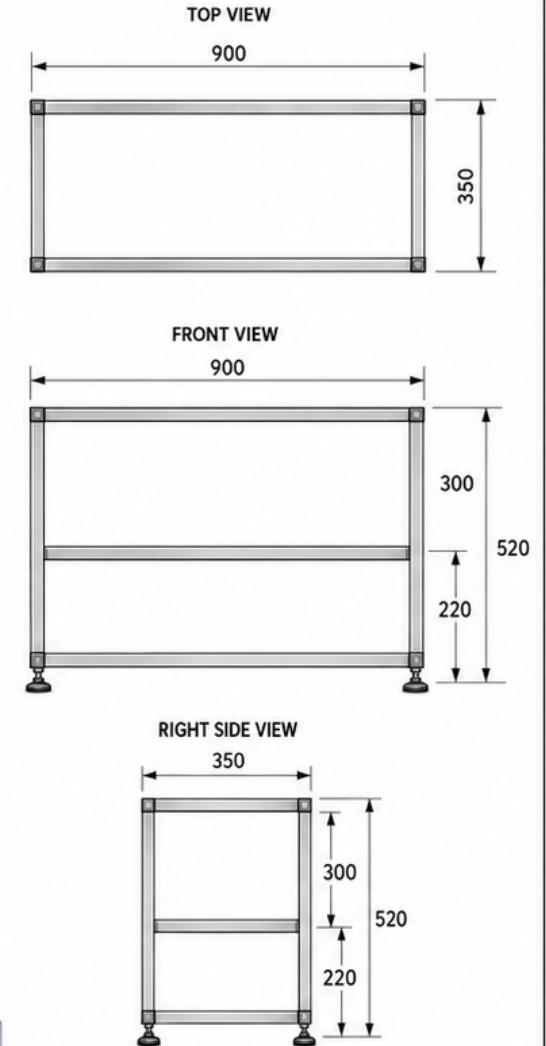
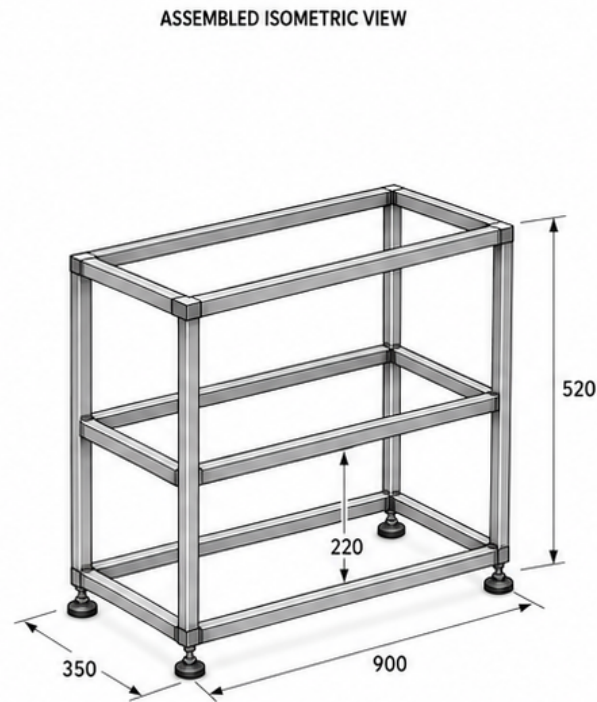


HONEY FILTRATION ENCLOSURE – FRAME ONLY

SS304 TUBULAR FRAME

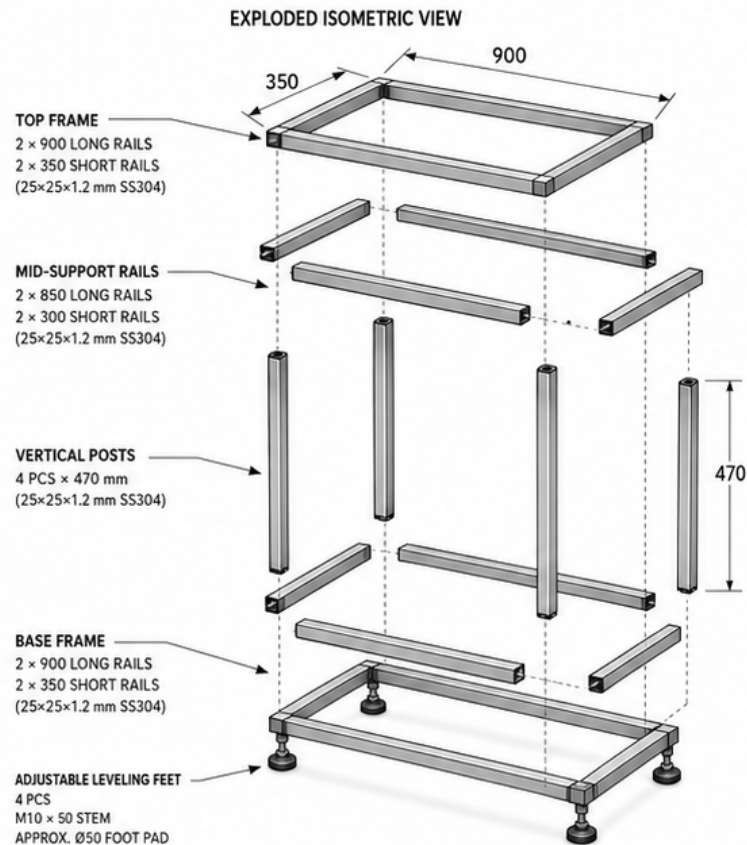

MATERIALS / CUT LIST – FRAME ONLY


ITEM	DESCRIPTION	MEMBER SIZE (mm)	LENGTH (mm)	QTY (pcs)	MATERIAL	NOTES
1	TOP FRAME – LONG RAIL	25 × 25 × 1.2 SHS	900	2	SS304	Forms top frame outer length (900 mm)
2	TOP FRAME – SHORT RAIL	25 × 25 × 1.2 SHS	350	2	SS304	Forms top frame depth (350 mm)
3	VERTICAL POST	25 × 25 × 1.2 SHS	470	4	SS304	Between top and base frames (Overall height 520 mm)
4	MID-SUPPORT LONG RAIL	25 × 25 × 1.2 SHS	850	2	SS304	Middle support level outer length (850 mm)
5	MID-SUPPORT SHORT RAIL	25 × 25 × 1.2 SHS	300	2	SS304	Middle support level depth (300 mm)
6	BASE FRAME – LONG RAIL	25 × 25 × 1.2 SHS	900	2	SS304	Forms base frame outer length (900 mm)
7	BASE FRAME – SHORT RAIL	25 × 25 × 1.2 SHS	350	2	SS304	Forms base frame depth (350 mm)
8	ADJUSTABLE LEVELING FEET	M10 × 50 STEM	—	4	SS304 STEM + NYLON PAD	Approx. Ø50 mm foot pad

FRAME SPECIFICATIONS

- Material: Stainless Steel 304
- Tube Size: 25 × 25 × 1.2 mm SHS
- Overall Size (L × D × H): 900 × 350 × 520 mm
- Mid-Support Elevation (from floor to top of mid-support): 220 mm
- Adjustable Leveling Feet: M10 × 50 stem
- Foot Pad Diameter: Approx. Ø50 mm

NOTES

- All dimensions are in millimeters (mm).
- Tolerance: ±1.0 mm unless otherwise noted.
- All welds shall be smooth and clean.
- Deburr all edges after fabrication.
- Verify all dimensions before fabrication.




THIRD ANGLE
PROJECTION


ACRYLIC FILTER BOX (WITH STAINLESS FILTER SCREEN)

FOOD GRADE – CLEAR ACRYLIC – 2 PORTS (INLET & OUTLET)

1. 3D RENDER

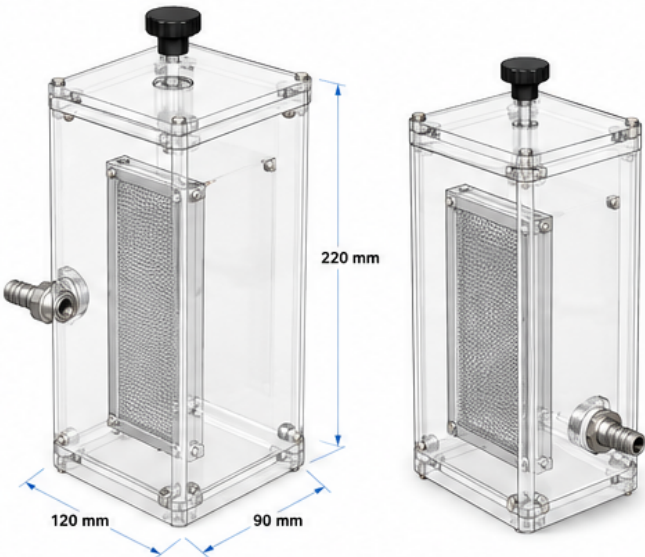

2. EXPLODED VIEW

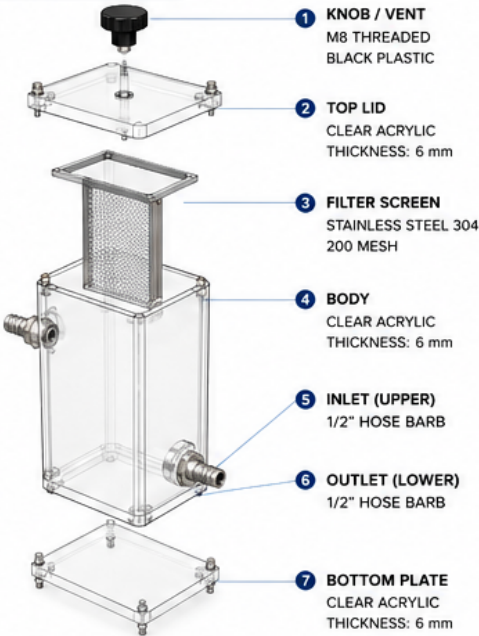

1 KNOB / VENT
M8 THREADED
BLACK PLASTIC

2 TOP LID
CLEAR ACRYLIC
THICKNESS: 6 mm

3 FILTER SCREEN
STAINLESS STEEL 304
200 MESH


4 BODY
CLEAR ACRYLIC
THICKNESS: 6 mm

5 INLET (UPPER)
1/2" HOSE BARB

6 OUTLET (LOWER)
1/2" HOSE BARB

7 BOTTOM PLATE
CLEAR ACRYLIC
THICKNESS: 6 mm

3. DIMENSIONS (mm)

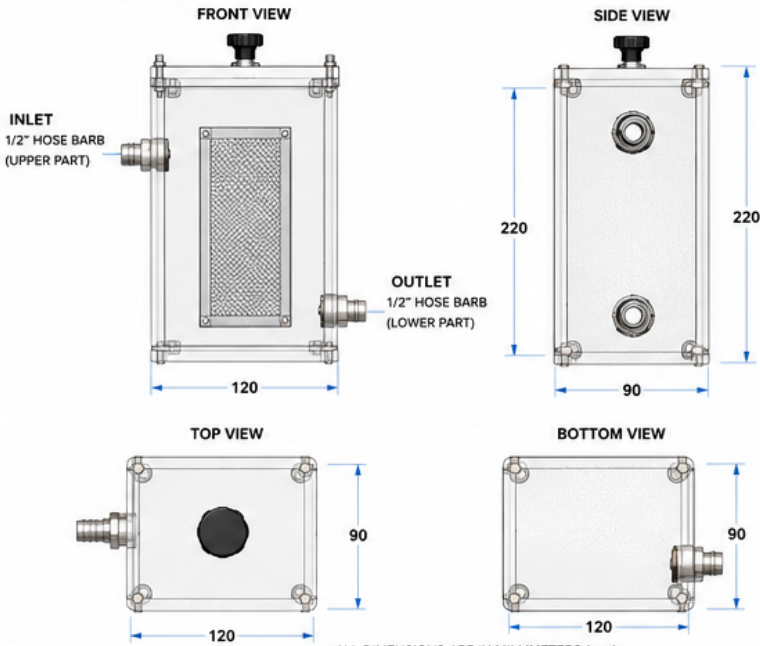

ALL DIMENSIONS ARE IN MILLIMETERS (mm)
TOLERANCE: ±1.0 mm

4. SPECIFICATIONS

MATERIAL (BODY & LID)	CLEAR CAST ACRYLIC (FOOD GRADE)
WALL THICKNESS	6 mm
INTERNAL SIZE (L x W x H)	120 mm x 90 mm x 220 mm
FILTER SCREEN	STAINLESS STEEL 304, 200 MESH
INLET	1/2" HOSE BARB (UPPER PART)
OUTLET	1/2" HOSE BARB (LOWER PART)
KNOB / VENT	M8 THREADED, BLACK PLASTIC
GASKET	FOOD GRADE SILICONE (BETWEEN LID & BODY)
MAX RECOMMENDED PRESSURE	≤ 2 BAR (LOW PRESSURE USE ONLY)
MAX TEMPERATURE	≤ 60 °C
APPLICATION	FILTRATION OF HONEY (LOW-PRESSURE FLOW)

5. ISOMETRIC VIEW



6. PARTS LIST

ITEM	DESCRIPTION	MATERIAL	THICKNESS	QTY
1	KNOB / VENT (M8 THREADED)	BLACK PLASTIC	—	1
2	TOP LID	CLEAR ACRYLIC	6 mm	1
3	FILTER SCREEN	SS304 STAINLESS STEEL	200 MESH	1
4	BODY	CLEAR ACRYLIC	6 mm	1
5	INLET (UPPER)	1/2" HOSE BARB (SS304)	—	1
6	OUTLET (LOWER)	1/2" HOSE BARB (SS304)	—	1
7	BOTTOM PLATE	CLEAR ACRYLIC	6 mm	1
8	BOLT & NUT	STAINLESS STEEL 304	—	8
9	GASKET / O-RING	FOOD GRADE SILICONE	—	1 SET


NOTES

- Designed for low-pressure honey filtration.
- Do not block outlet. Avoid dead-heading the pump.
- Clean all parts with warm water before first use.
- Ensure all connections are tightened properly to prevent leakage.
- All materials used are food grade.


RECOMMENDED FLOW DIRECTION




APPLICATION EXAMPLE

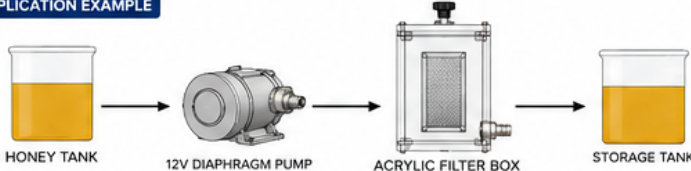

3. STAINLESS STEEL FUNNEL (HOPPER)

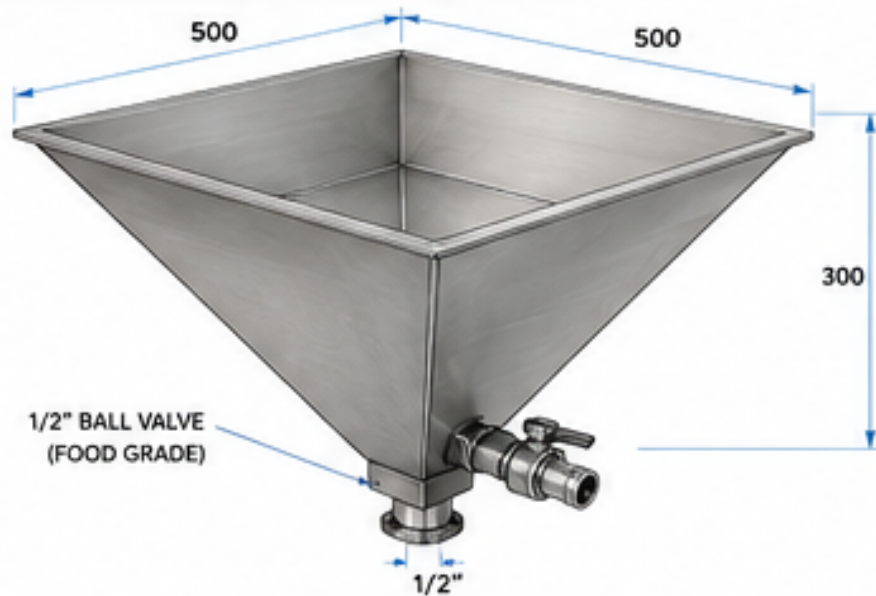

FUNNEL – DIMENSIONS

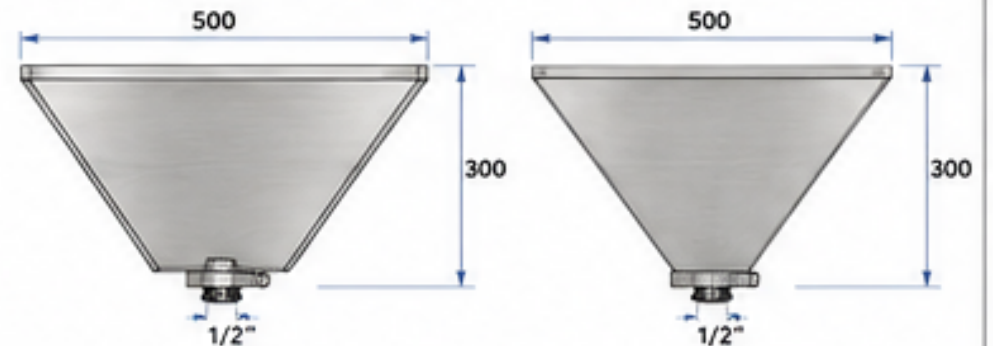

FUNNEL – SPECIFICATIONS

- Material: Stainless Steel 304 (Food Grade)
- Sheet Thickness: 1.5 mm
- Top Opening: 500 mm x 500 mm
- Height: 300 mm
- Bottom Outlet: 1/2 inch (with Ball Valve)
- Finish: Food Grade Brushed

HONEY CYLINDER (1 KG CAPACITY)

CLEAR ACRYLIC – 2 PORTS (INLET TOP / OUTLET BOTTOM)


3D RENDER



SPECIFICATIONS	
CAPACITY (HONEY)	1 KG (APPROX.)
INTERNAL VOLUME	~1.18 L
INTERNAL DIAMETER	100 mm
CLEAR BODY HEIGHT	150 mm
WALL THICKNESS (ACRYLIC)	5 mm
OVERALL HEIGHT (WITH CAPS)	~185 – 195 mm (APPROX.)
INLET / OUTLET	1/2" HOSE BARB (2 PORTS ONLY)
BODY MATERIAL	CLEAR CAST ACRYLIC (FOOD GRADE)
CAP MATERIAL	SS304 STAINLESS STEEL
GASKET / O-RING	FOOD GRADE SILICONE
MAX RECOMMENDED PRESSURE	≤ 2 BAR (LOW PRESSURE USE ONLY)
RECOMMENDED PUMP	12V DIAPHRAGM PUMP

- ### KEY FEATURES
- Food grade materials
 - 2 ports only: inlet (top/head) and outlet (bottom)
 - Transparent body for visibility of honey flow
 - Easy to disassemble and clean
 - Low-pressure flow-through application
 - Tight seal with silicone O-ring

3D ISOMETRIC VIEWS

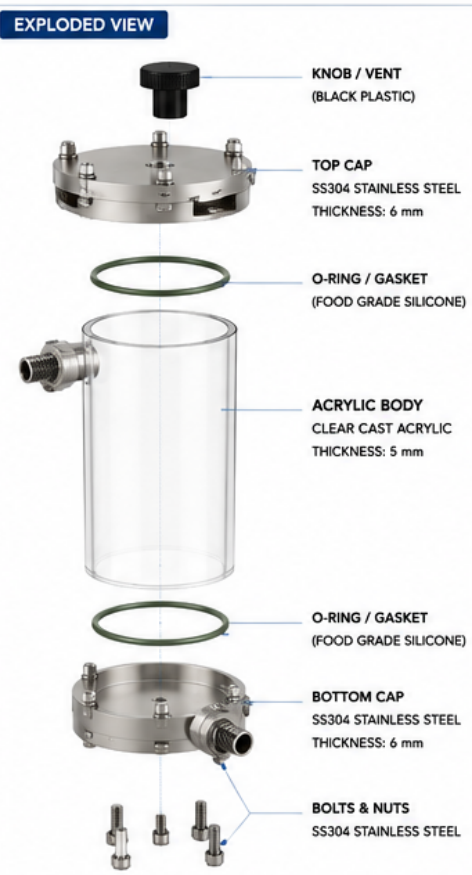

DIMENSIONS (mm)

FRONT VIEW

Ø110

150 CLEAR BODY HEIGHT

185 – 195 OVERALL HEIGHT (APPROX.)

Ø100 INTERNAL DIAMETER

INLET 1/2" HOSE BARB (UPPER PART)

OUTLET 1/2" HOSE BARB (BOTTOM PART)

TOP VIEW

110

BOTTOM VIEW

110

SIDE VIEW

Ø110

185 – 195 OVERALL HEIGHT (APPROX.)

Ø100 INTERNAL DIAMETER

PORT SIZE (BOTH INLET & OUTLET)

1/2" HOSE BARB

COMPATIBLE HOSE ID: 12.5 mm (1/2")

MATERIAL: SS304

CAPACITY CALCULATION

Internal Volume = $\pi \times (D/2)^2 \times H$

$= 3.1416 \times (0.10/2)^2 \times 0.15$

$= 0.001178 \text{ m}^3$

$= 1.18 \text{ L (APPROX.)}$

1 kg honey ≈ 0.704 L (using $\rho = 1.42 \text{ kg/L}$)

Thus, 1.18 L volume is suitable for 1 kg honey with headspace.

NOTES

- For low-pressure flow-through filtration only.
- Do not block outlet or dead-head the pump.
- Clean all parts with warm water before first use.
- Ensure all connections are tightened properly to prevent leakage.
- All materials used are food grade.