Soft Starts.

Sockeye

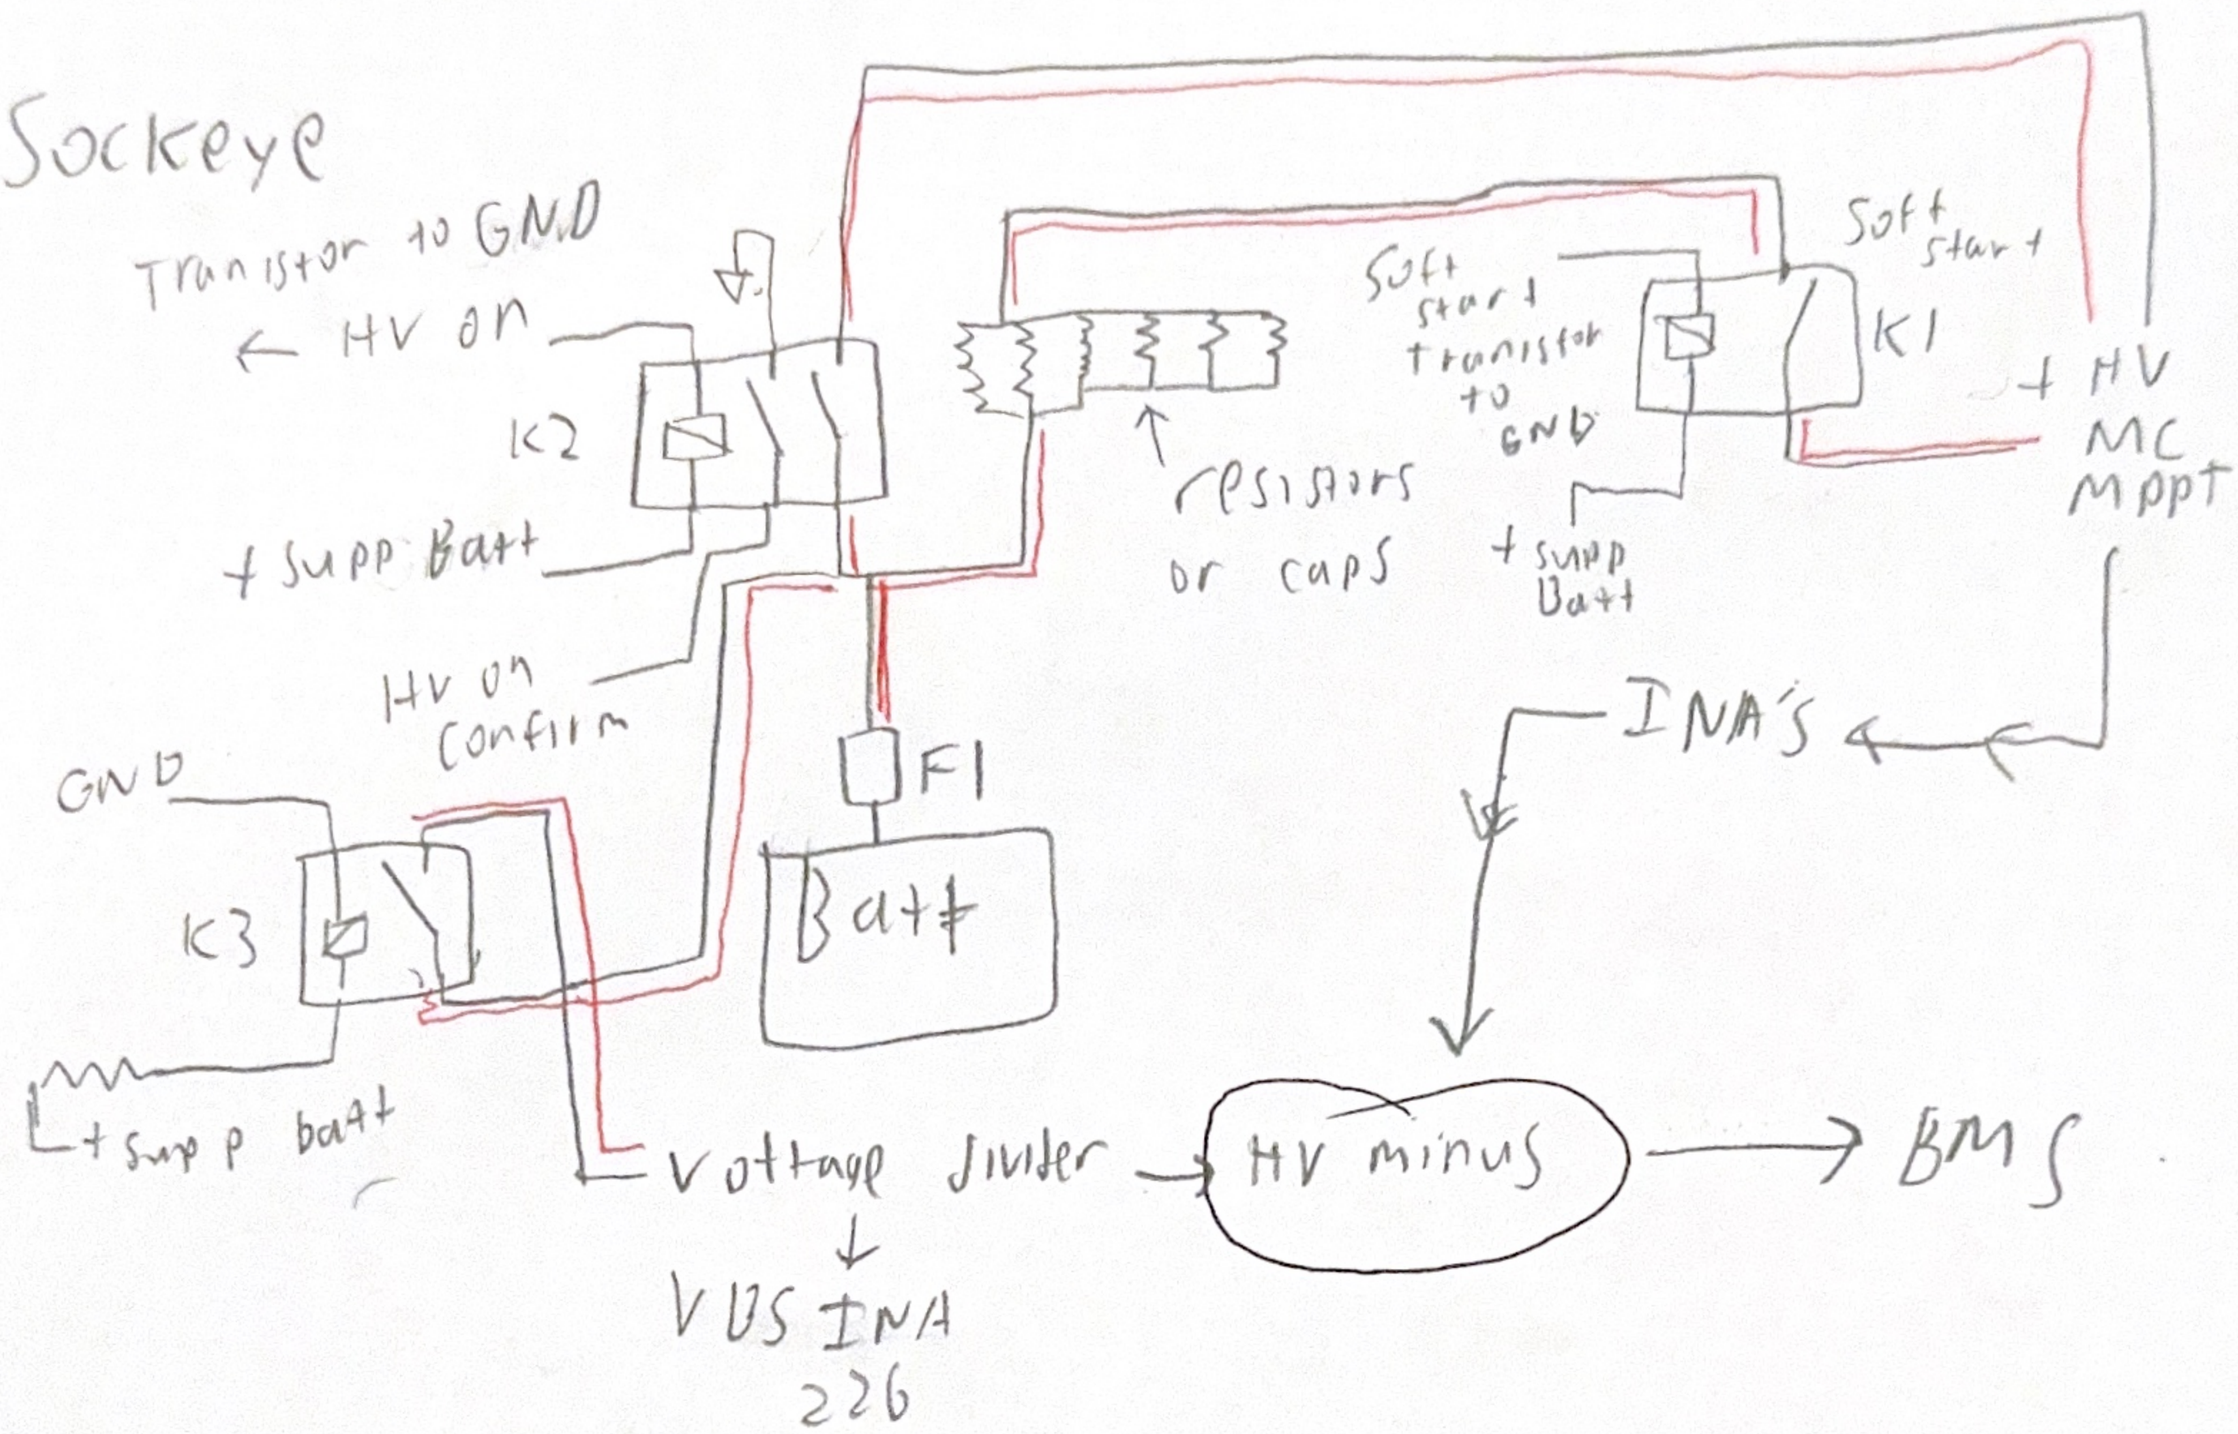

1. Whenever car is on, K3 is active, supplying power to current sensors from main batt.
2. HV Button turns on K1, allowing either R's or C's to charge, then connecting to +HV
3. K2 is activated, then confirms w/ signal ~~too~~ to teensy. Connects +HV to HV components.
4. - MC, - MPPT connects to current sensors. Then to HV minus on BMS