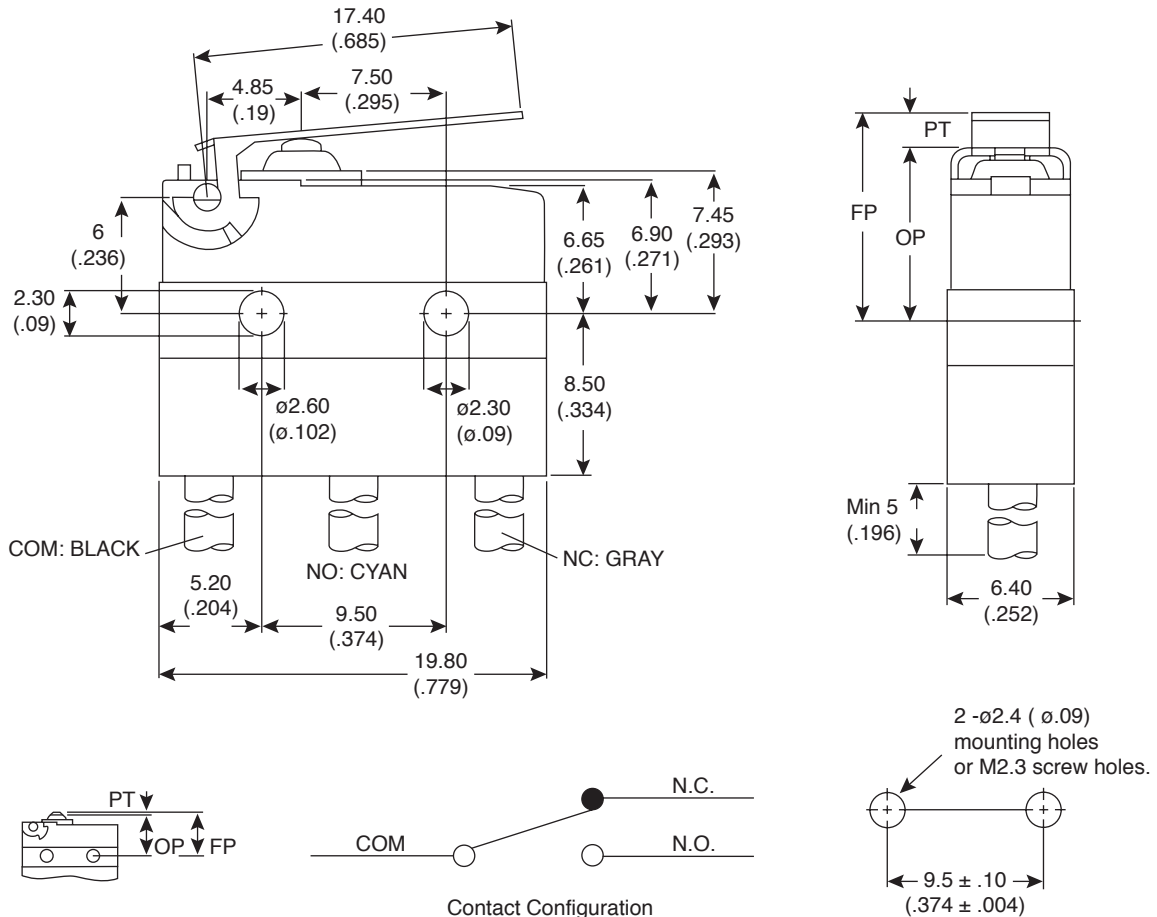


## Dimensions: mm (In.)

**Mechanical Specifications:**

- Operating Frequency: mechanical 120 operations/min
- Mechanical Life: 2,000,000 operation Min.

**Electrical Specifications:**

- Rating: 6A / 125VAC / 250VAC
- Operating Frequency: electrical 10~30 operations/min
- Electrical Life: 6,000~50,000 operations
- Contact Resistance: 100m $\Omega$  max.
- Insulation Resistance: 100m $\Omega$  min. at 500VDC
- Dielectric Strength: 1,000VAC RMS (50-60HZ)

**Operating Characteristics:**

- OF Max. (g): 300
- Op (mm):  $8.4 \pm 0.3$
- PT Max. (mm): 1.2
- OT Min. (mm): 0.6
- MD Max. (mm): 0.2
- FP Max. (mm): 9.3
- RF Max. (g): 70

Sealed Snap Switch  
SNS71-06-300XX-W01

**Mountain  
Switch**