

1

2

3

4

5

6



7

8

9

Top Layer

Bottom layer

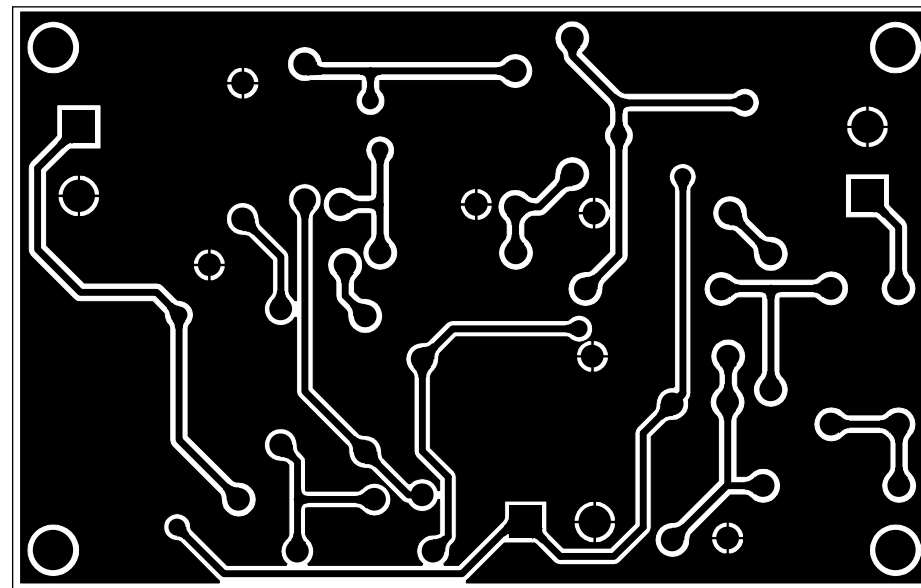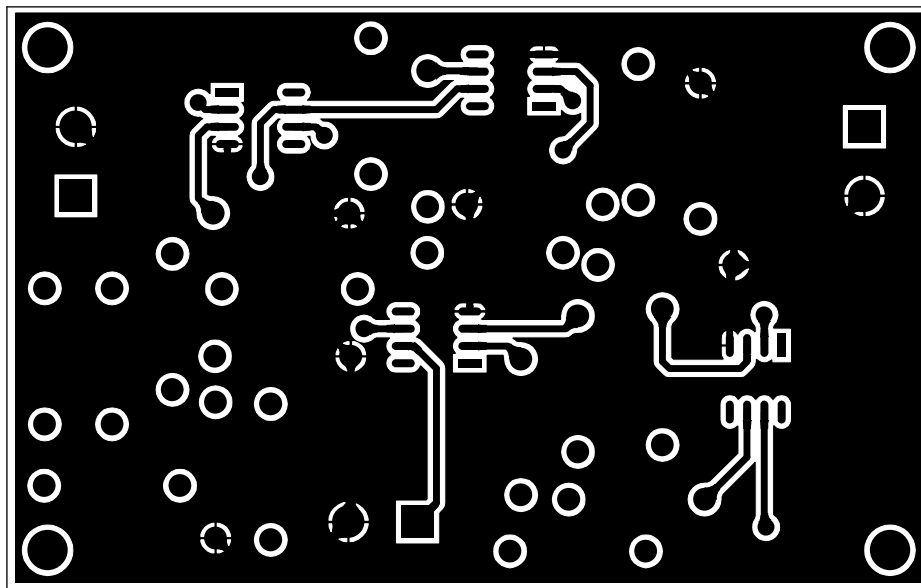

Gerber top: LPF-400kHz-OPA820-THT.GTL  
Gerber bottom: LPF-400kHz-OPA820-THT.GBL

tolerances				tolerance	change	num-	modification				09.11.2016	S.Kulk	S.Kulk						
thread according to DIN				surface:				scale:				Date	editor	certifi-	Appr.	Index			
german projection				material:				material type:				substitution for dimensions w/o tolerance:							
								LPF-400kHz-OPA820-THT											
semi finished product				material consumption:				weight:				project version				TDE		PN10052	3
number of pieces per package:				Format: DIN A 3				Classing:											

Supporting regulations which apply

milling: V:

ZV:

For this drawing we reserve ourselves all rights  
+ Pay attention to protection note according to DIN ISO 16016  
+ Changes from the supplier need the previous approval by TDE

Handwritten  
remarks  
are not allowed