

1

2

3

4

5

6

7

8

9

Top solder mask

Bottom solder mask

A

B

C



D

E

F

G

H

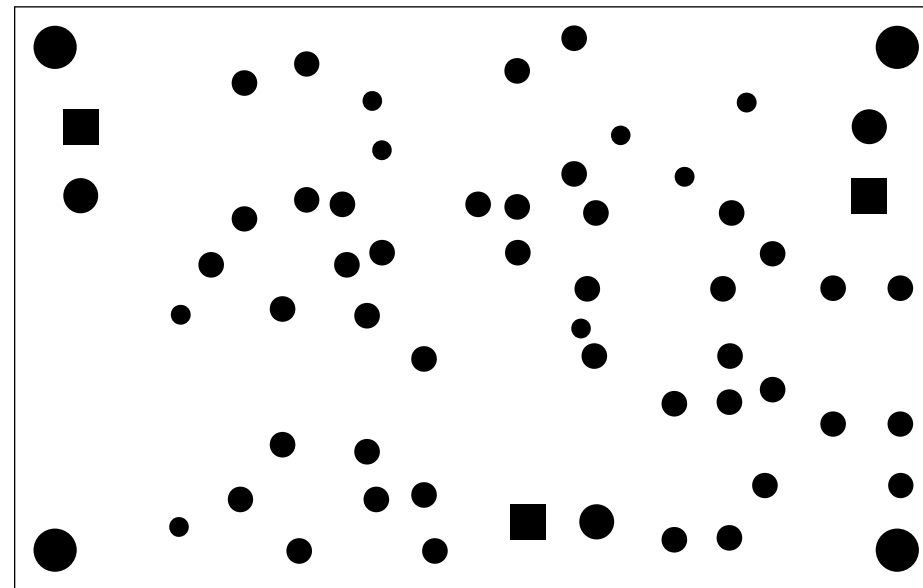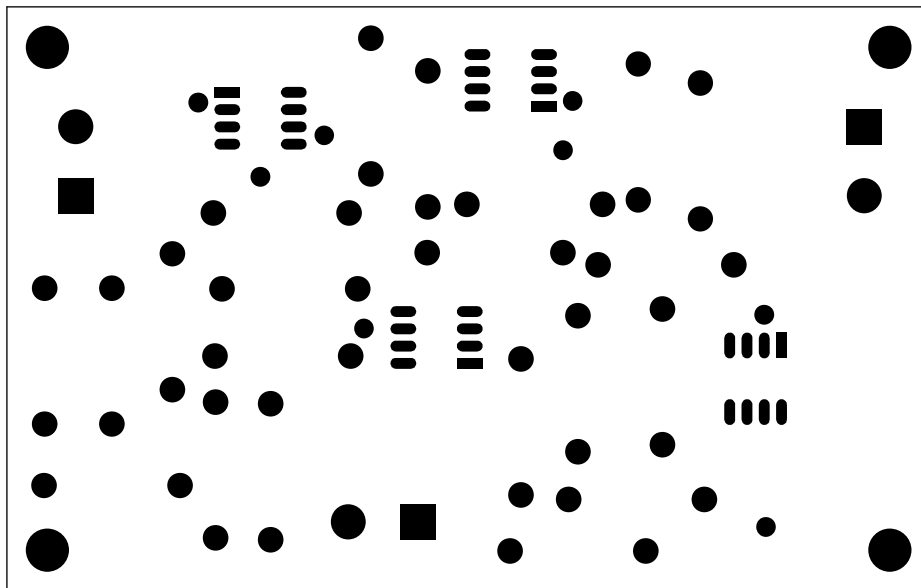

Gerber solder top:  
LPF-400kHz-OPA820-THT.GTS

Gerber solder bottom:  
LPF-400kHz-OPA820-THT.GBS

toleranced DIN				tolerance	change date	num- ber	modification				09.11.2016		S.Kulik	S.Kulik			
thread according to DIN							scale:		Date		editor		certifi- cated		Appr.		Index
surface:							material type:		substitution for dimensions w/o tolerance:								
german projection		material:					LPF-400kHz-OPA820-THT										
							project version		PN10052								
semi finished product							TDE										
material consumption:																	
weight:																	
number of pieces per package:							Format: DIN A 3		Classing:								

Supporting regulations which apply

mailing:

V:

ZV:

For this drawing we reserve ourselves all rights  
+ Pay attention to protection note according to DIN ISO 16016  
+ Changes from the supplier need the previous  
approval by TDE

Handwritten  
remarks  
are not allowed