

1

2

3

4

5

6


7

8

9

## PCB specification

Epoxyde glass farbic copper-clad laminated sheet of defined flammability according to EN 60249-2-5-FVO-IEC-EP-GC Cu. Insulating material group IIIa according to EN 60664-1. Nominal thickness 1.5mm ( include copper foil on both sides ). Double-sided, final thickness without solder mask < 1.64mm. Base copper clad 18um,final copper clad > 60um on on both sides. Surface HAL leadfree ( SnCu- base alloy without Ag).

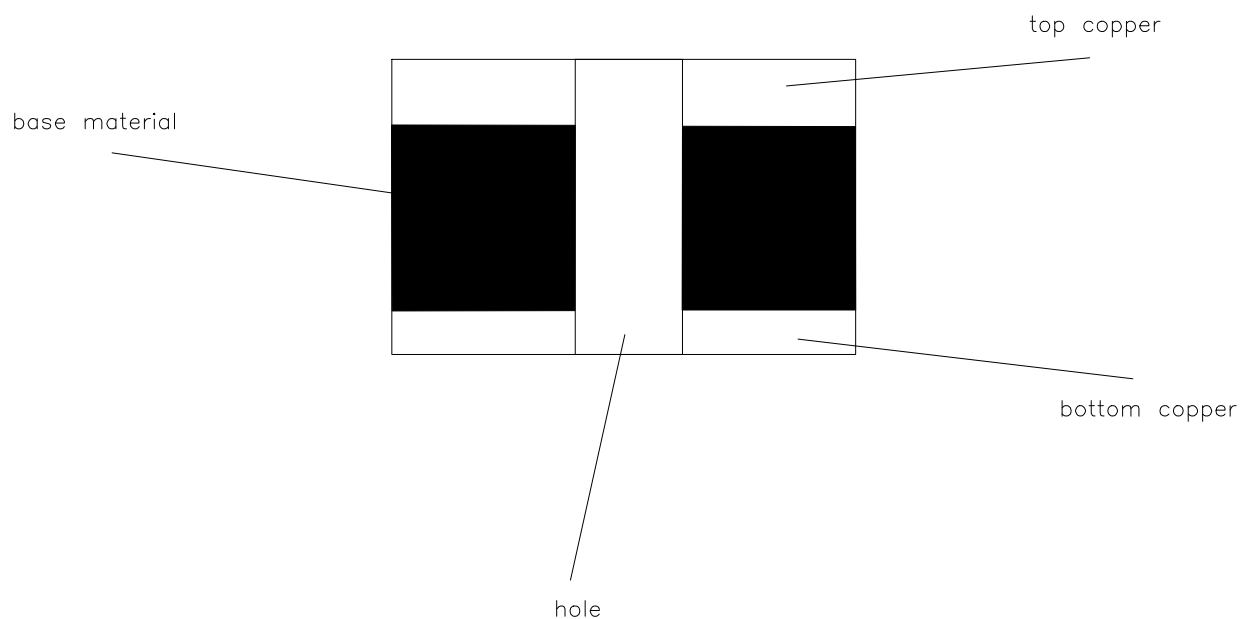

For this drawing we reserve ourselves all rights  
+ Pay attention to protection note according to DIN ISO 16016  
+ Changes from the supplier need the previous approval by TDE

Handwritten  
remarks  
are not allowed

toleranced DIN	tolerance	change date	num- ber	modification		13.06.2016	S.Kulik	S.Kulik		
thread according to DIN				scale:		Date	editor	certifi- cated	Appr.	Index
surface:				material type:		substitution for dimensions w/o tolerance:				
german projection		material:		DVT low pass filter						
semi finished product				project version		1				
material consumption:				TDE		PN10046				
weight:						6				
number of pieces per package:				Format: DIN A 3		Classing:				

Supporting regulations which apply

mailing:

V:

ZV: