




Part Number : [475710001](#)
Product Description : 1.10mm Pitch microSD Card Header with Detect Switch, Height 2.30mm, Lead-Free, 0.762µm Gold (Au) Plating
Series Number : 47571
Status : Active
Product Category : Memory / SIM Card Connectors

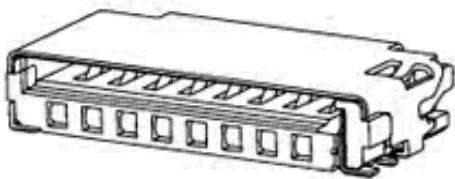

Documents and Resources

Drawings

[475710001_sd.pdf](#)
[PK-47571-001-002.pdf](#)

3D Models and Design Files


[STEP AP242](#)
[SOLIDWORKS](#)
[Creo](#)
[Symbol and Footprint \(Multi-Format\)](#)
[EE-47571-001-001.pdf](#)
[SP-47571-001-001.zip](#)

Specifications

[PS-47309-001-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)7771-DC (04 Feb 2026)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Memory / SIM Card Connectors
Series	47571
Description	1.10mm Pitch microSD Card Header with Detect Switch, Height 2.30mm, Lead-Free, 0.762µm Gold (Au) Plating
Comments	Push-Pull Type
Product Name	microSD Card
Style	Guide and Holder
UPC	822350965224

Electrical

Current - Maximum per Contact	0.5A
Shielded	Yes
Voltage - Maximum	5V DC

Physical

Card Detection Switch	Open
Card Entry Location	Front

Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	10000
Ejector Button Side	N/A
Material - Contact	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Nickel
Material - Resin	High Temperature Thermoplastic
Material - Shell	Stainless Steel
Net Weight	0.316/g
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Retention	Yes
Pitch - Mating Interface	1.10mm
Pitch - Termination Interface	1.10mm
Temperature Range - Operating	-40° to +85°C
Termination Interface Style	Surface Mount

Solder Process Data

Max-Duration	20
Lead-Free Process Capability	REFLOW
Max-Cycle	2
Max-Temp	255

Mates With / Use With

Mates with Part(s)

Description	Part Number
Mates With	Standard SIM Card

Use with Part(s)

Description	Part Number
Use With	microSD Card

This document was generated on Feb 22, 2026