


Solution

1.

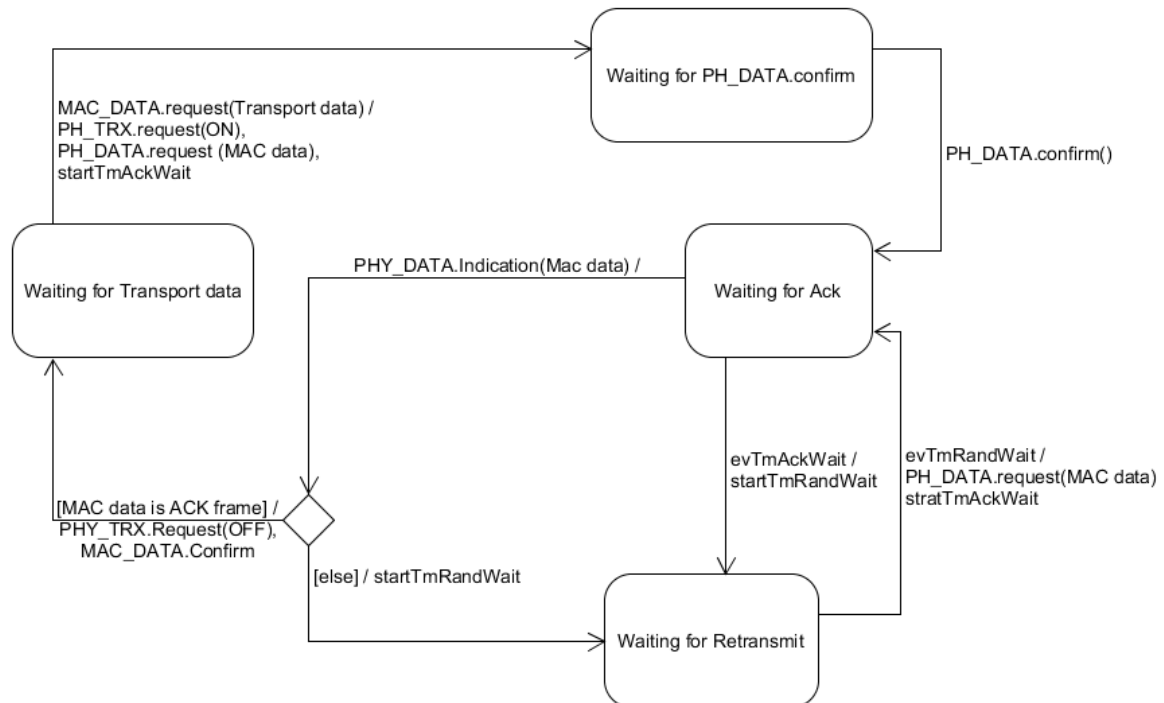

2.

sensorId (16 bits)	frame type [0: DATA, 1: ACK] (1 byte)	frame data (for DATA frame) (n bytes)	CRC (2 bytes)
-----------------------	---	---	------------------

3.

T-CONNECT.request(appID)

T-CONNECT.confirm()

(T-CONNECT.indication() and T-CONNECT.response only for concentrator)


T-DISCONNECT.request

(T-DISCONNECT.indication() only for concentrator)

T_DATA.request(application data)

(T-DATA.indication(application data) only for concentrator)

4.

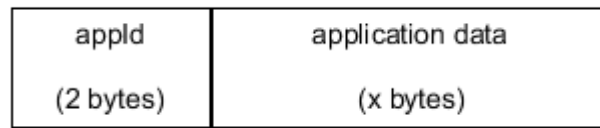

5.

