

1 Main technical data:

Display content: 8 numbers + 3 radix point + 13 Prompts

Operating voltage: 2.8V

Drive mode: 1/3BIAS, 1/4DUTY

View angle: 12:00

Character high: 7.25mm

Display type: TN, Positive

Display mode: Reflective


Connection way: Metal Pin

Operating temperature: -10~+60°C

Storage temperature: -20~+70°C

2 LCD Outline size:


SML08239

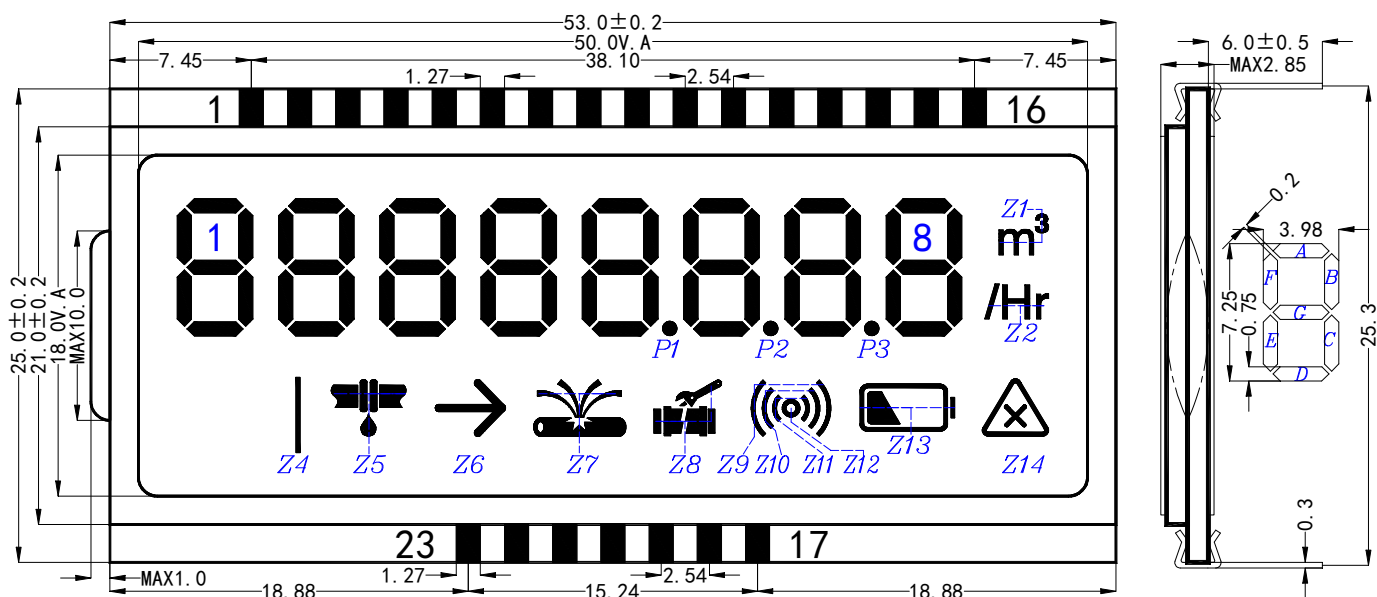

WWW.SUNMAN.COM.CN

UNIT: MM

3 All display figure:

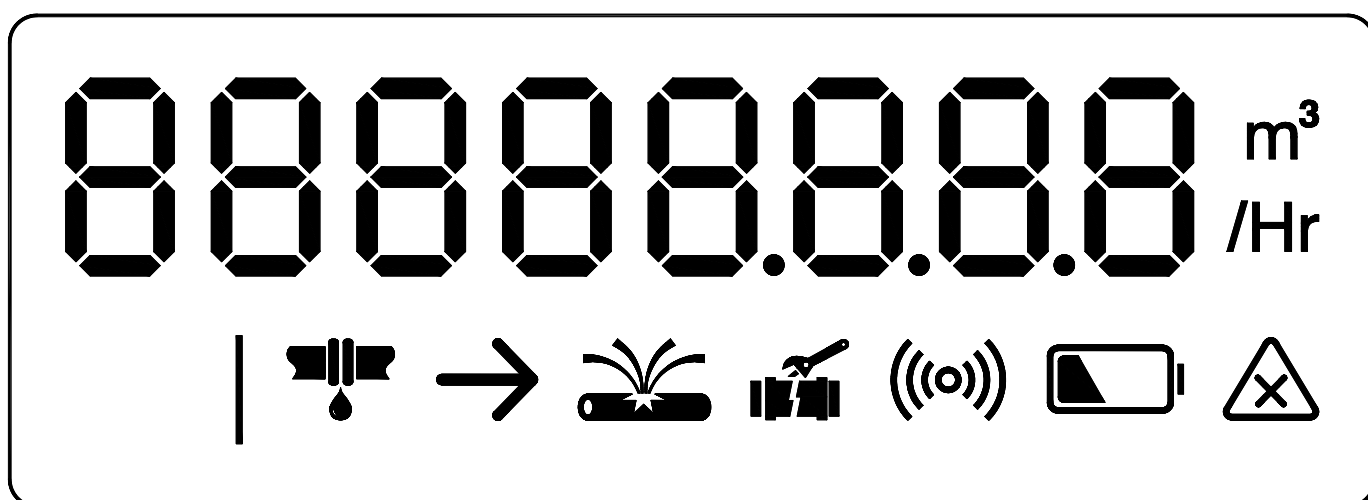

4 LCD pins instruction:

PIN	1	2	3	4	5	6	7	8	9	10	11	12
COM1	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A
COM2	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B
COM3	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C
COM4	1D	\	2D	Z4	3D	Z5	4D	Z6	5D	P1	6D	P2
PIN	13	14	15	16	17	18	19	20	21	22	23	
COM1	7F	7A	8F	8A	Z1	Z12	\	\	\	\	COM1	
COM2	7G	7B	8G	8B	Z2	Z11	\	\	\	COM2	\	
COM3	7E	7C	8E	8C	Z14	Z10	Z7	\	COM3	\	\	
COM4	7D	P3	8D	\	Z13	Z9	Z8	COM4	\	\	\	