

The following instructions are used to **reboot the Harmonics Time Core**. The steps may be completed in any order.

SIGNAL

Connect **one** cable to **two** ports based on the **number of vowels and consonants** found in the serial code of the Time Core.


Ⓡ	Й	Ψ	Ⓢ
Ⓢ	Й	М	Σ

Number of vowels	Port Symbol
0	Ψ
1	Ⓢ
2	Й
3	Δ
4+	Ⓢ

Number of consonants	Port Symbol
0	Ⓢ
1	Ⓢ
2	Ⓢ
3	Ⓢ
4+	Ⓢ

AIR FLOW

Consult the arms of the **clock** on the Time Core to determine the correct **vent wheel** shape(s) to install.




# of sides on shape	Clock arm position
5	Red arm facing 12 and blue arm facing 7
6	Yellow arm facing 1 and blue arm facing 2
8	Green arm facing 3 and yellow arm facing 1
10	Green arm facing 9 and red arm facing 5

FREQUENCY

Insert the correct colour of **cassette tape** based on the **sum** of the numbers found in the serial code of the Time Core.

Sum of serial code numbers	Cassette tape colour
0–2	Purple
3–5	Blue
6–8	Green
9–11	Pink
11–13	Red

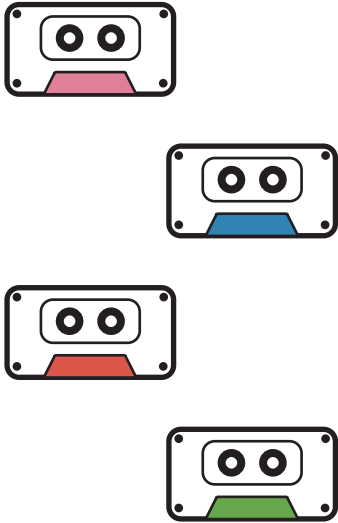


POWER

Check the Time Core’s **interior wires** to determine which slot to insert **one** battery.

Insert battery into Slot 1 if there is exactly one blue wire and 4 white wires.

Otherwise, **insert battery into Slot 2** if there are more than two red wires.

Otherwise, **insert battery into Slot 3** if there is an odd amount of green wires.

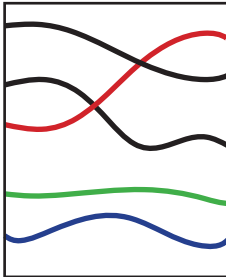

REBOOT CONFIRMATION

After all steps have been completed, enter the **Master Synchronization Sequence** using the buttons on the Time Core.