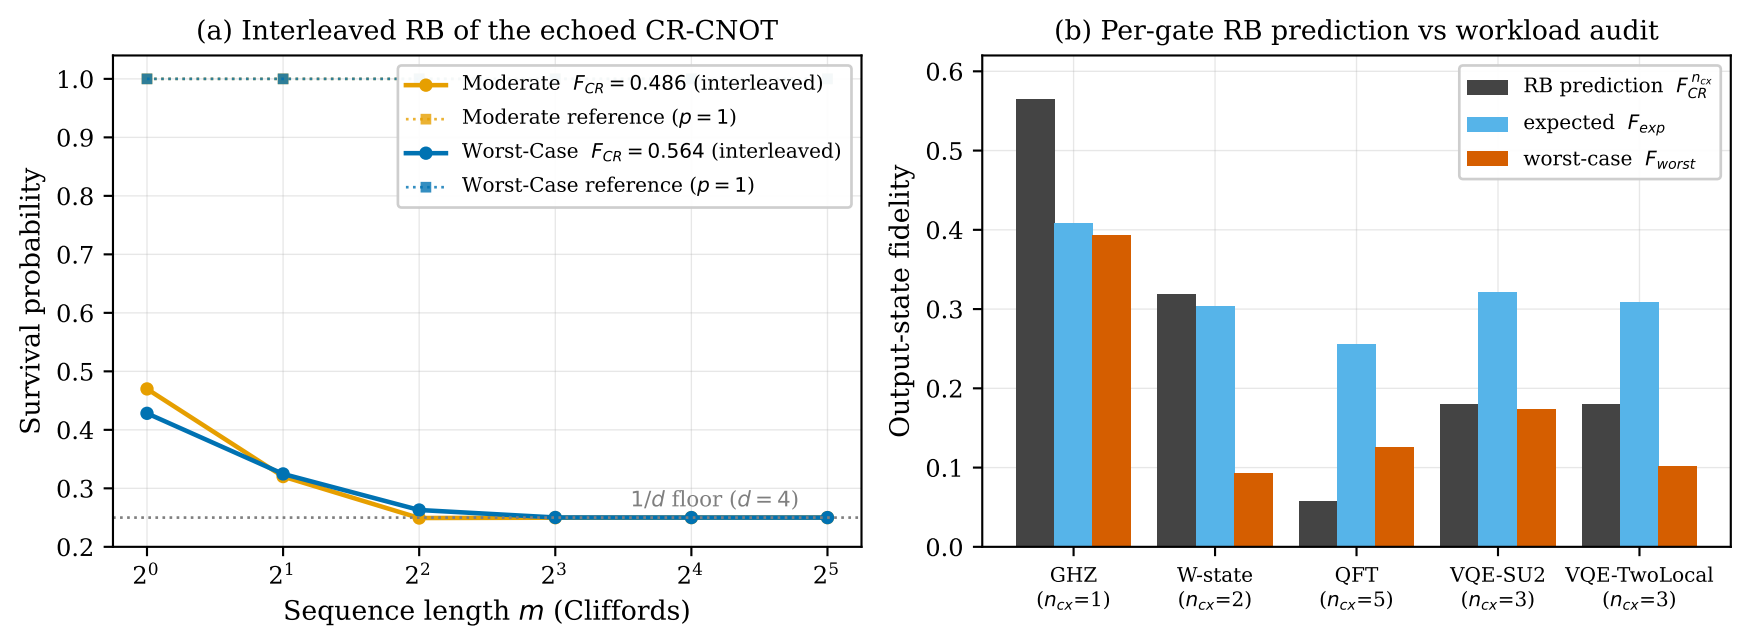
(a) Interleaved RB of the echoed CR-CNOT
Survival probability
Sequence length m (Cliffords)
Moderate $F_{CR} = 0.486$ (interleaved)
Moderate reference ($p = 1$)
Worst-Case $F_{CR} = 0.564$ (interleaved)
Worst-Case reference ($p = 1$)
1/d floor ($d = 4$)
(b) Per-gate RB prediction vs workload audit
Output-state fidelity
RB prediction $F_{CR}^{n_{cx}}$
expected F_{exp}
worst-case F_{worst}
GHZ (n_{cx}=1)
W-state (n_{cx}=2)
QFT (n_{cx}=5)
VQE-SU2 (n_{cx}=3)
VQE-TwoLocal (n_{cx}=3)