



warden-3 dissolved oxygen casts — grey points tagged not-on-bottom (|winch speed| > 0.3 m/s or line length < 1.5 m)




Station 1 — 41.7469°N, 70.3778°W
2026-09-02 07:30 EDT

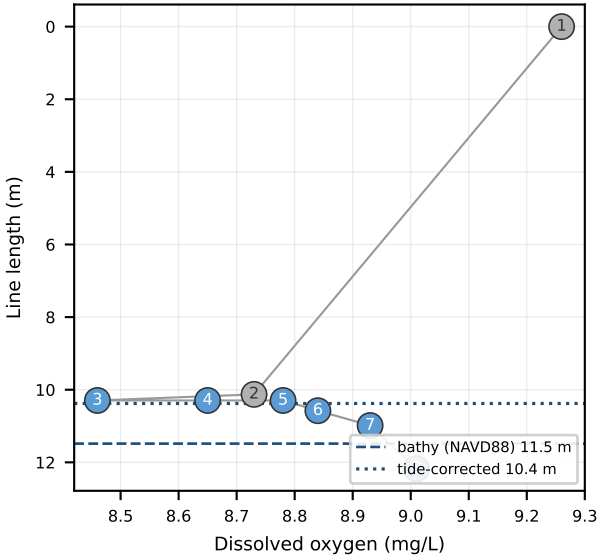


Station 2 — 41.7831°N, 70.3497°W
2026-09-02 09:27 EDT

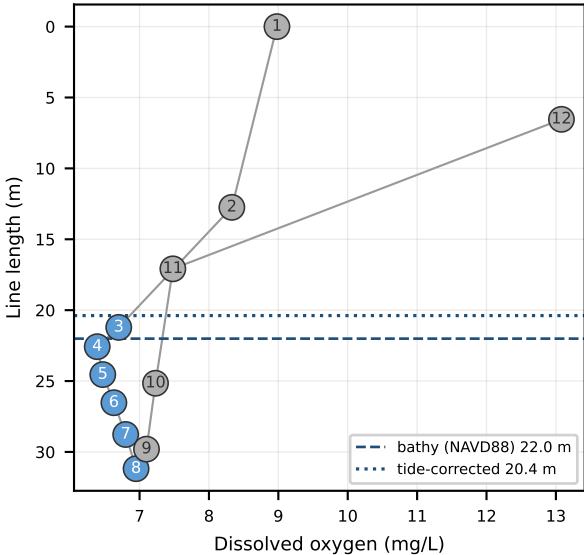


Station 3 — 41.8053°N, 70.3262°W
2026-09-02 10:50 EDT

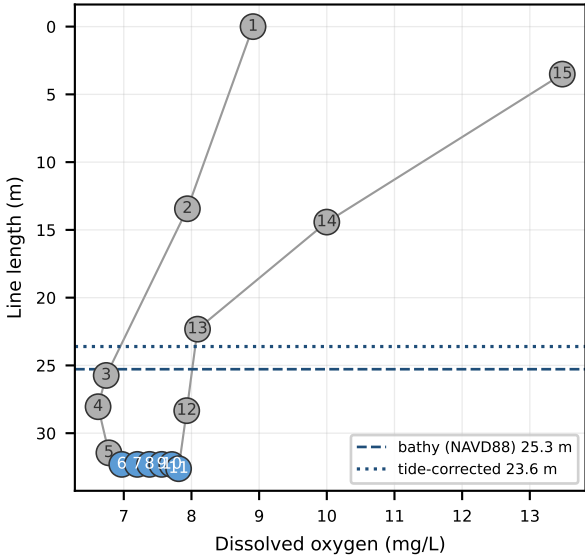


Station 4 — 41.8051°N, 70.2652°W
2026-09-02 13:08 EDT

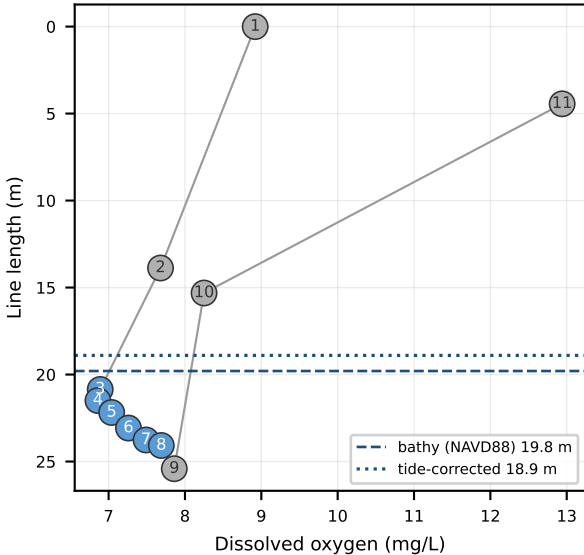


Station 5 — 41.8050°N, 70.2050°W
2026-09-02 15:06 EDT

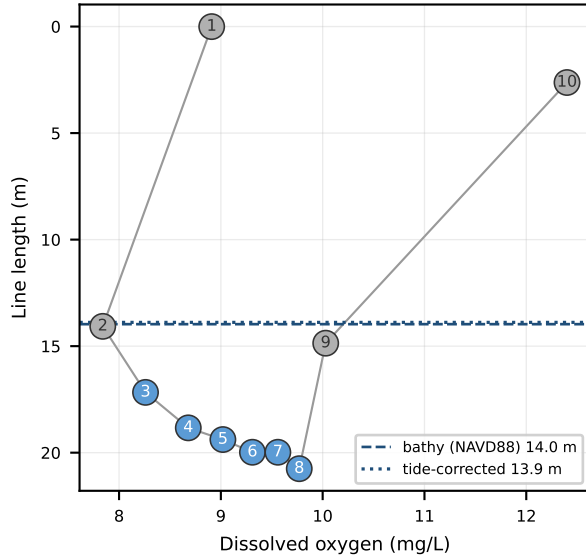


Station 6 — 41.7697°N, 70.2063°W
2026-09-02 16:28 EDT

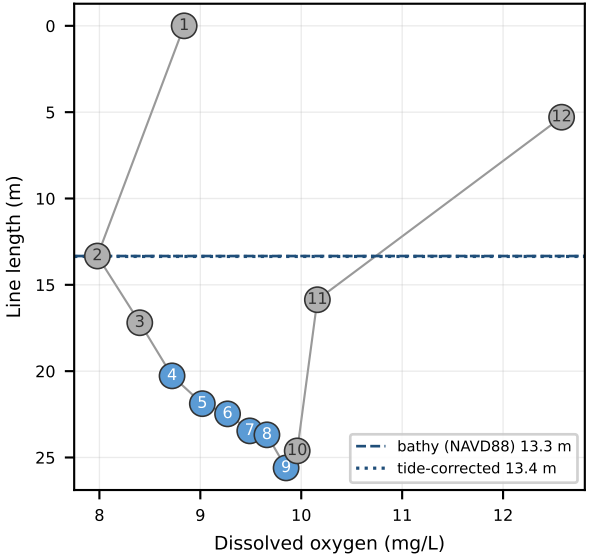


Station 7 — 41.7699°N, 70.2673°W
2026-09-02 17:51 EDT

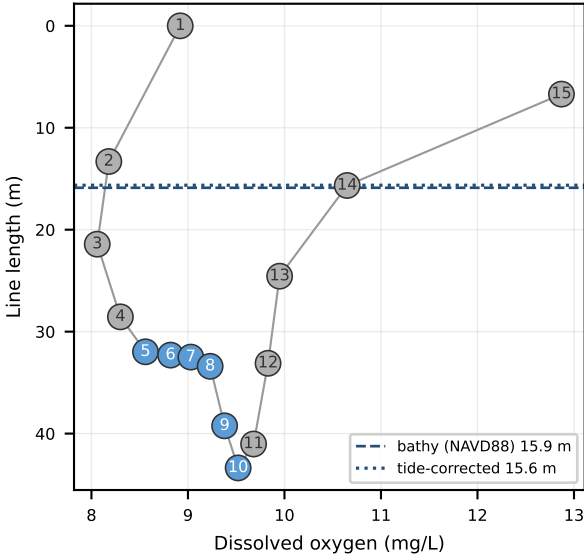

Station 8 — 41.7696°N, 70.3243°W
2026-09-02 19:12 EDT

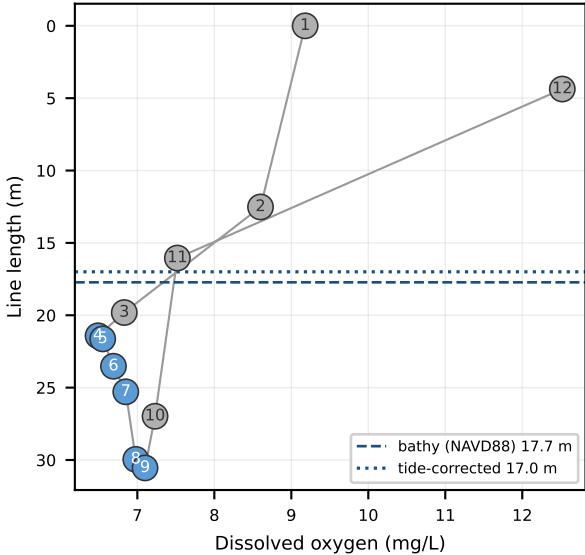

warden-3 route and minimum on-bottom dissolved oxygen

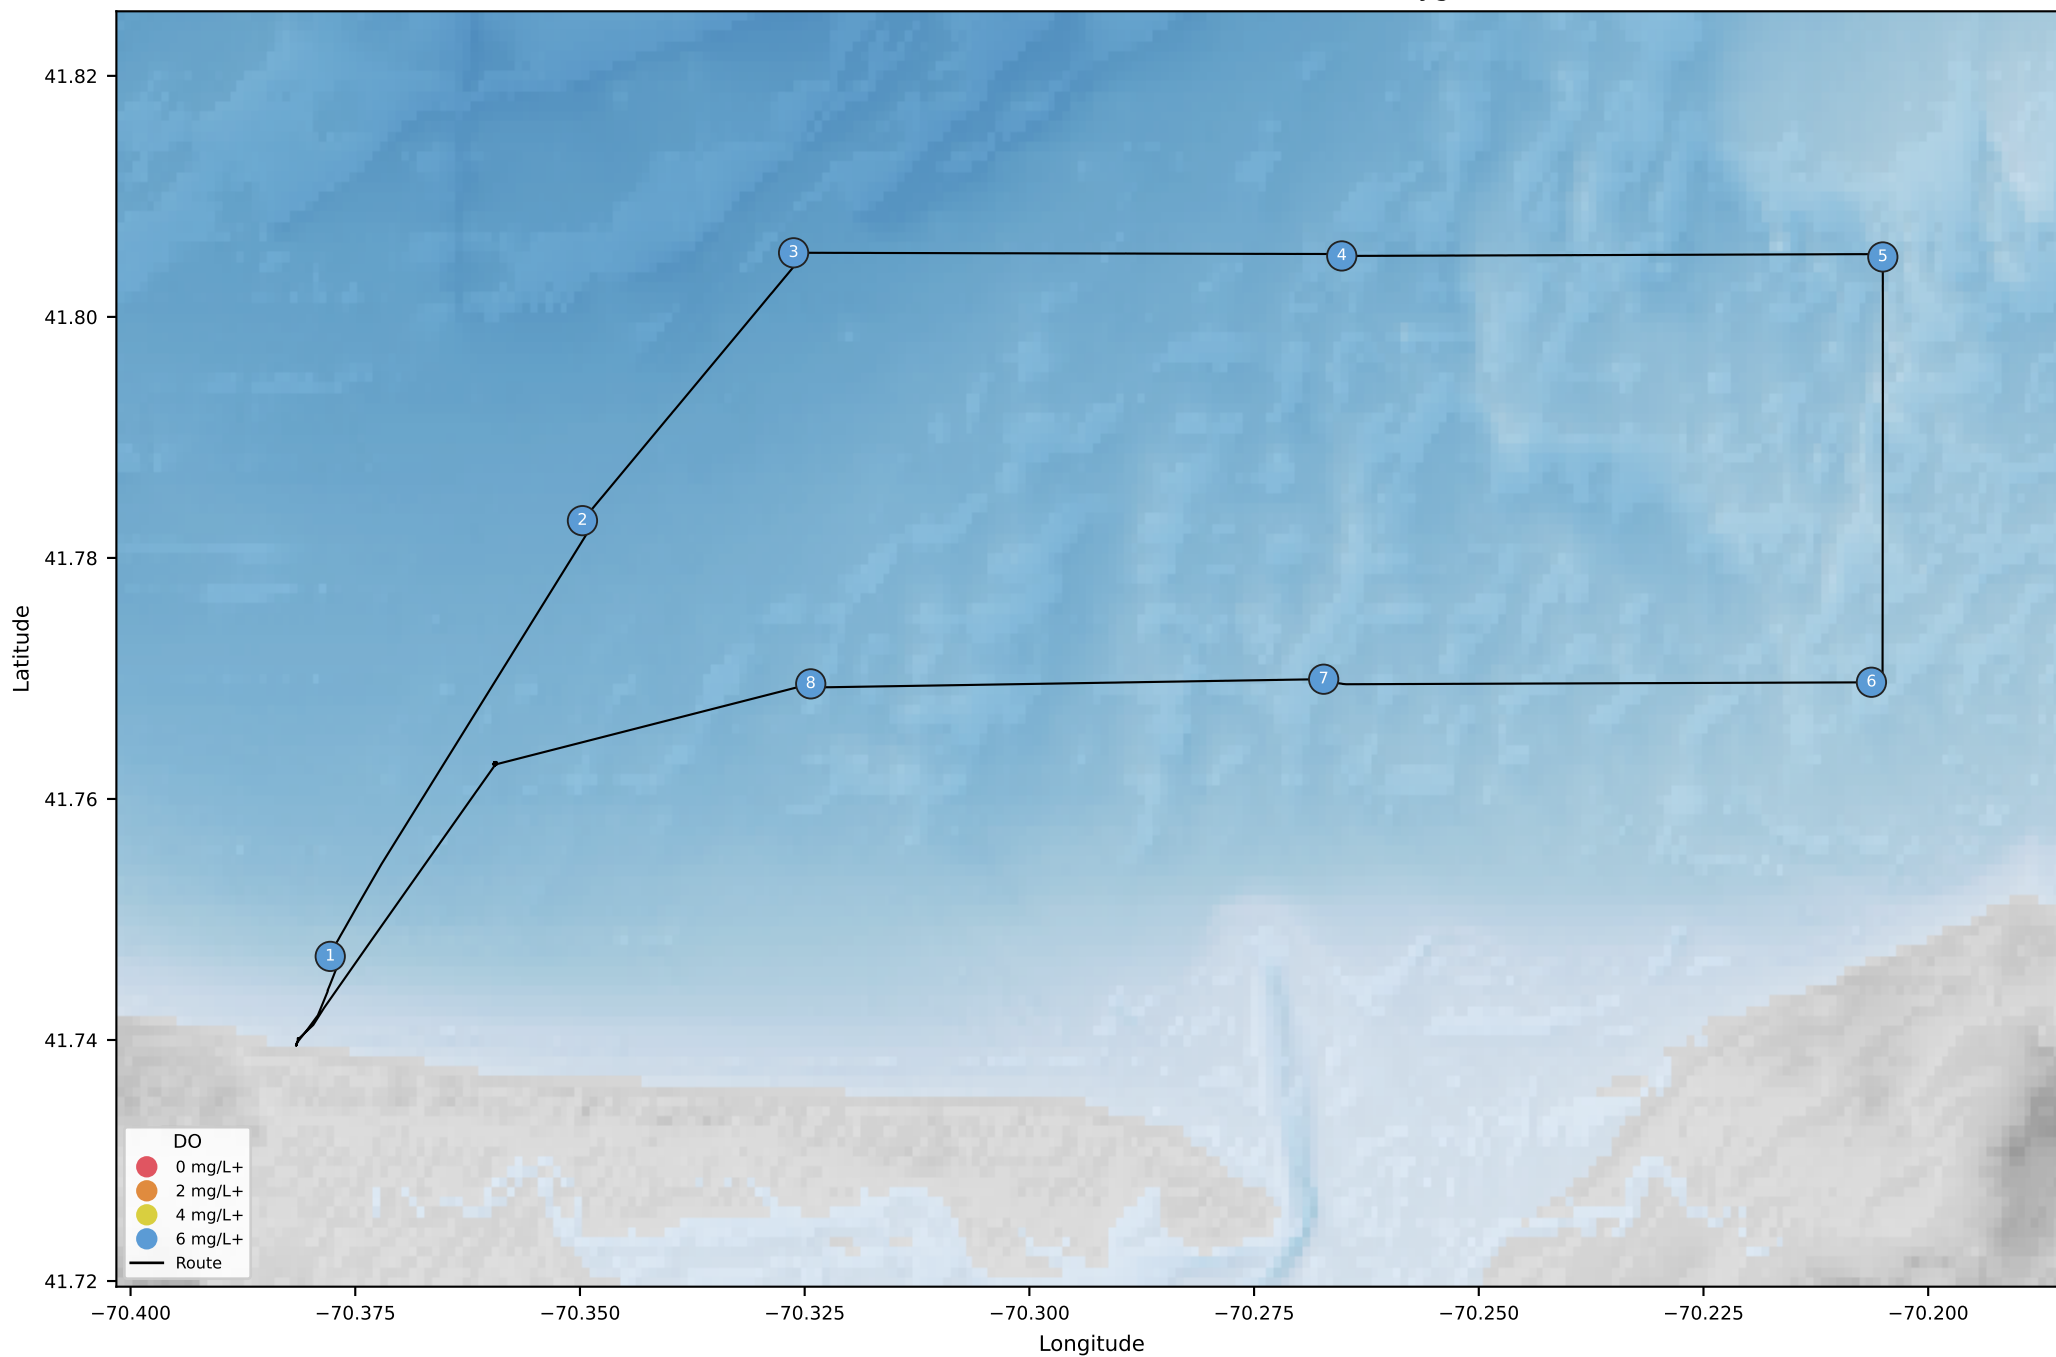

DATA SOURCES

- Vehicle telemetry: InfluxDB Cloud bucket warden, callsign warden-3, measurements global_position_int, winch-status (warden-2) or winch_status2 (other vehicles), and profile_sample.
- Bathymetry: NOAA NCEI best-available DEM mosaic (DEM_mosaics/DEM_all ImageServer). In this area the mosaic is fed by the CUDEM 1/9 arc-second tiles ncei19_n41x75/n42x00_w070x25/w070x50_2021v1, exported at 1/3 arc-second (~10 m).
- Tides: NOAA CO-OPS predictions, station 8447435, datum MLLW, metric, 6-minute interval.
- Vertical datum transform: NOAA VDatum, MLLW→NAVD88 = -1.719 m (± 0.117 m) evaluated at the track centroid.

FILTERING AND PROCESSING

- global_position_int and winch_status reduced to 1 Hz server-side with aggregateWindow(every: 1s, fn: last, createEmpty: false); profile_sample kept at its native 30 s rate.
- Winch line length (and warden-2 speed) are linearly interpolated in time onto each DO sample timestamp; gaps longer than 30 s are left null.
- For warden-2, a reading is tagged not on bottom when |winch speed| > 0.3 m/s or line length < 1.5 m. Other vehicles are tagged when winch state_enum is not 3 (on-bottom), or its on-bottom transition line length is more than 3.0 m short of tide-adjusted bathymetry evaluated with the onboard NOAA NCEI, VDatum, and nearest-station CO-OPS procedure. Tagged readings are greyed out and excluded from the station minimum shown on the chart.
- Seabed elevation is sampled bilinearly from the DEM at each vessel fix.

ASSUMPTIONS AND CAVEATS

- DEM elevations are treated as metres relative to NAVD88, the CUDEM vertical datum. bathymetry_depth_m is the negated seabed elevation; tide_adjusted_depth_m adds the predicted water level.
- Tides are predicted astronomical levels, not observed water levels: storm surge and wind setup are not represented.
- One tide station and one VDatum offset are applied across the whole survey area, so spatial variation in tidal phase, range and datum separation is ignored. The on-bottom filter separately evaluates its transition bathymetry at the transition location.
- Winch line length is used as the depth proxy for each reading. There is no wire angle or layback correction, so a reading's true depth is at most its line length.
- The Lowell Instruments DOT-2 logger does not report pressure (profile_sample.pressure_dbar is zero throughout), so no independent sensor depth is available as a check.
- Positions are the vessel GPS fix (global_position_int), not the position of the sensor itself. The vessel free-drifts during sensor deployment.
- Quoted uncertainty covers the VDatum transform only. DEM vertical uncertainty, tide prediction error and GPS error are not included.
- Where every reading at a station is tagged, no minimum on-bottom DO exists and the station is drawn grey.