MODEL TL-6930

International size reference: D, ER32L615

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)


Nominal capacity @ 30mA, to 2VRated voltage

■ Weight 92.5g (3.26 oz)

Volume 51 ccOperating temperature range -40°C to +85°C


W.L. Component Recognition MH 12193




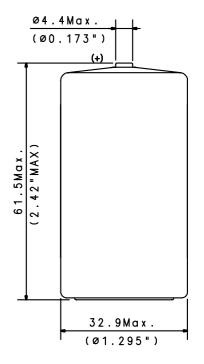


AVAILABLE TERMINATIONS:

/S P/N 15693021000 PRES. CONTACTS
/T P/N 15693031000 SOLDERABLE TABS

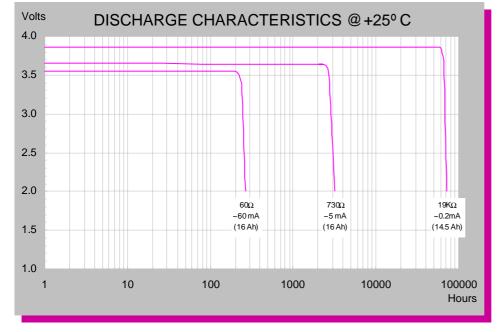

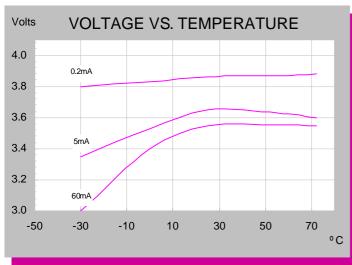

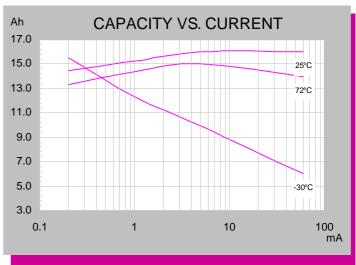

For Pulses Plus Applications Only

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. B 03/04