

INDUSTRIAL PRODUCT DATASHEET

A608 Carrier Board for Jetson Orin™ NX/Orin™ Nano

A608 Carrier Board for Jetson Orin™ NX/Orin™ Nano enabling autonomous mobile robots, AI video analytics, machine vision, and generative AI.

SKU

105110001

UPDATED

2026-06-10 12:18:53

PRICE

\$209.00(Excl. VAT)







Overview



The A608 Carrier Board for Jetson Orin™ NX/Orin™ Nano is designed to accelerate edge AI deployment. It is ideal for applications including autonomous mobile robots, AI video analytics, machine vision, and generative AI.

Key Features

Product Gallery

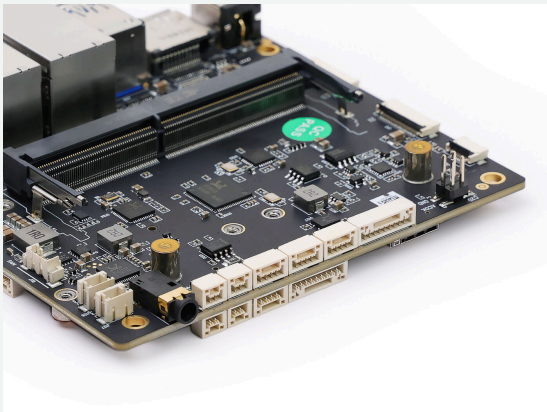

seeed studio



Specification

Carrier Board

Storage		1x M.2 Key M 2242 Interface for NVMe SSD
Networking	Ethernet	2x Gigabit Ethernet (10/100/1000M)
	M.2 KEY E	1x M.2 KEY E(WIFI) Interface
	M.2 KEY B	1x M.2 KEY B(4G/5G) Interface
I/O	USB	4x USB 3.2 Type A (Integrated USB 2.0) 1x USB 2.0+3.2 Type C
	Camera	1x 15pin CSI
	Audio	1x3.5 Audio Jack 2x MIC 2x SPEAKER 1x SPEAKER FEEDBACK
	Display	1x HDMI
	Fan	1x Fan Connector (5V PWM)
	Multifunctional Port	2x IIC; 1x CAN (FD) 1x SPI 7x IO 3.3V 2x UART 1x DEBUG 1x POWER 1x RESET 1x RECOVERY
	RTC	1x 3.0V RTC
Power		9-20V(MAX 60W) DC Input
Mechanical (W x D x H)		101.5mm x 95mm
Operating Temperature		-25°C~65°C

	Robotics Carrier	A608
Voltage	19-54V	9-20V
USB	6x USB 3.0/3.2 Type-A	4x USB 3.2 Type-A
CAN	2x CAN	1x CAN
GMSL	GMSL Extension available 4-lane CSI	N/A
Pricing	\$189	\$259

Hardware Overview

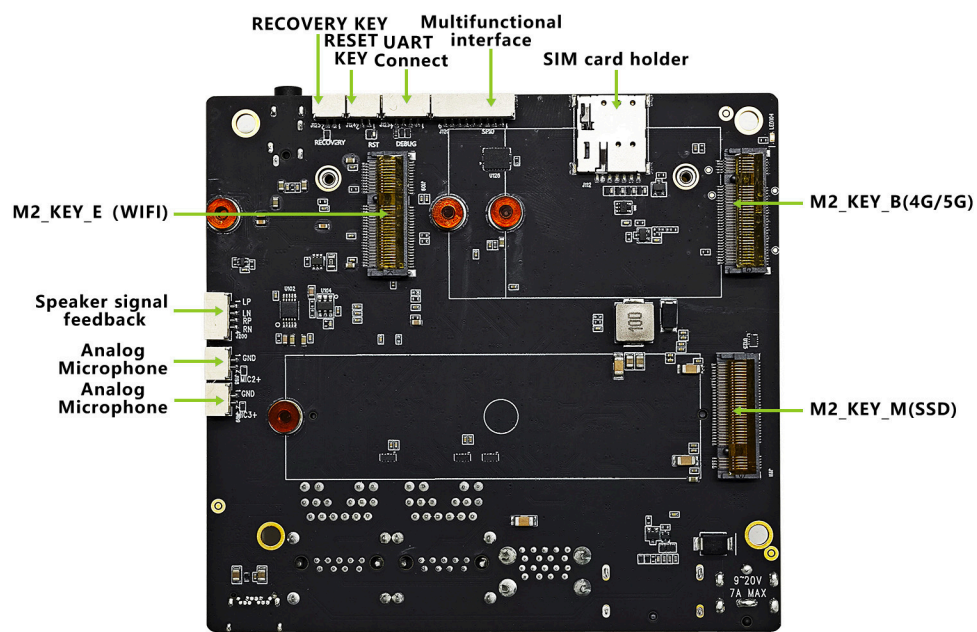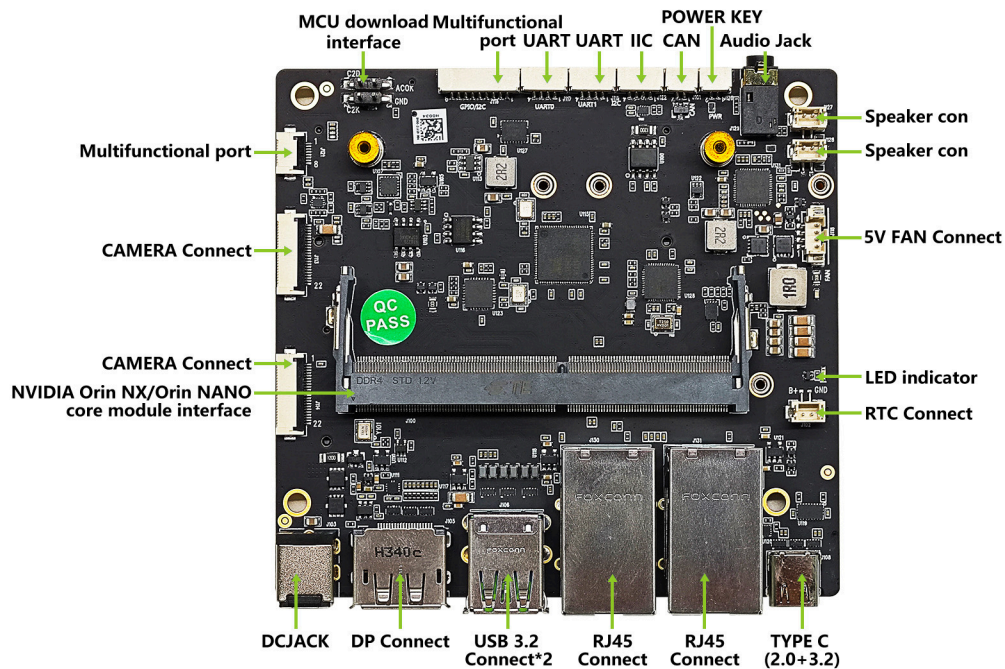

Applications

- **Autonomous Mobile Robot (AMR)**
- **AI Video Analytics**
- **Machine Vision**
- **Generative AI**

Part List

A608 Carrier Board for Jetson Orin™ NX/Orin™ Nano	x1
19V/4.74A(Barrel Jack 5.5/2.5mm) Power Adapter (Power cord not included)	x1
2 Pin Dupont Female Cable	x4
4 Pin Dupont Female Cable	x4
9 Pin Dupont Female Cable	x2

Compliance & Logistics



HSCODE	8543909000
USHSCODE	8543903500
UPC	
EUHSCODE	8543709099
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- <https://www.seeedstudio.com/Jetson-A608-Carrier-Board-for-Orin-NX-Orin-Nano-Series-p-5853.html>
- [A608 Carrier Board](#)
- [A608 CAD Files](#)
- [A608 3D File](#)
- [NVIDIA Jetson Devices and Carrier Boards Comparisons](#)
- [Seeed NVIDIA Jetson Hardware Catalog](#)

Seeed Technology Co.,Ltd.

9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676

Web: www.seeed.cc

Shop: www.seeedstudio.com