




Revision History			
REV	DATE	SCH Name	DESCRIPTION
V1.0	03/28/2022	Jetson-10-1-A_V1.0_SCH_220328	Initial Production Release.
V2.0	06/13/2022	reComputer J101_V2.0_SCH_220613	Page 5:Changed Q3 from BSS138W to MMST3904-7-F; Changed R8 from 0R to 10K, R14 from 1M to 10K. Changed U25 from LC1463CB5ATR18 to LC1458CB5TR18. Page 7:Changed U14 from LC1463CB5ATR33 to LC1458CB5TR33. Page 8 13:Added resistors R200=R201=R202=1K. Page 9:Changed SD card circuits from DNP to Populated. Page 10:Changed Q1 from BC817W,115 to MMST3904-7-F; Changed R5,R11 from 100K to 10K. Page All:Changed NMOS from BSS138W to 2SK3018 with ESD.
V2.0	08/02/2023	reComputer J101_V2.0_SCH_230802	Page 5:Changed C111 from 100nF to 1uF. Page 7:Changed C112 from 100nF to 1uF; Changed R152 from 499R to 0R; R118 from 0R to DNP; Changed Q26 from DNP to 2SK3018; Changed X2 12MHz from CL=18pF to CL=10pF; Changed C94,C95 from 27pF to 15pF.
V2.0	08/08/2024	reComputer J101_V2.0_SCH_230802	Page 6:Changed X1 from 5YAA12000182TFA0Q3 to M12000I382.

Schematic: reComputer J101	
SHEET	SHEET NAME
01	Table of Contents
02	SODIMM connector 1/3
03	SODIMM connector 2/3
04	SODIMM connector 3/3
05	Type C / Power In
06	USB2.0 Hub / Type-A
07	Button MCU For Power Up
08	M.2 Key-E
09	Gigabit Ethernet, Micro SD
10	HDMI
11	CAM Connector
12	40Pin GPIO Expansion Header
13	Fan, Debug and EEPROM


UART, I2C, CAN and GPIOs

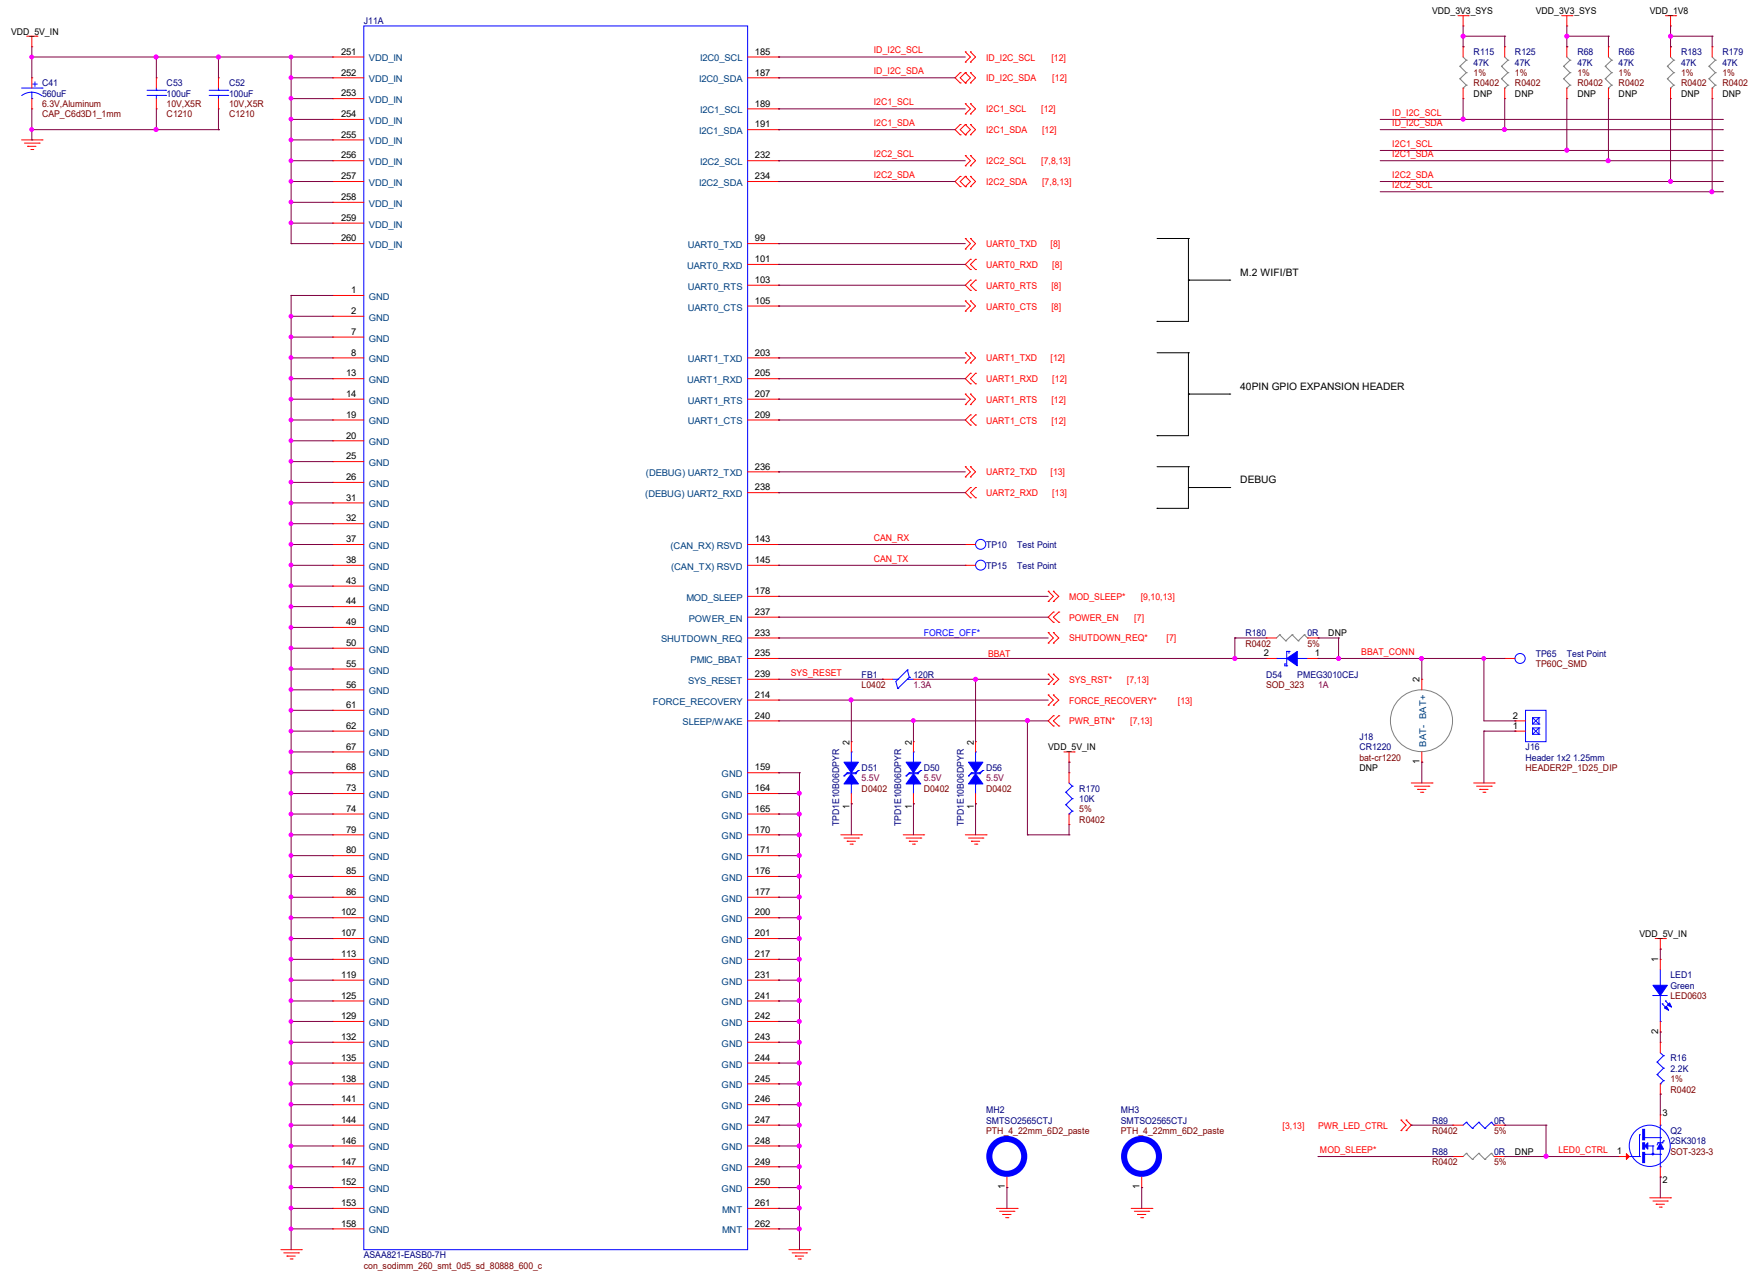

GPIOs, USB2.0, I2S, SPI, GBE and CSI

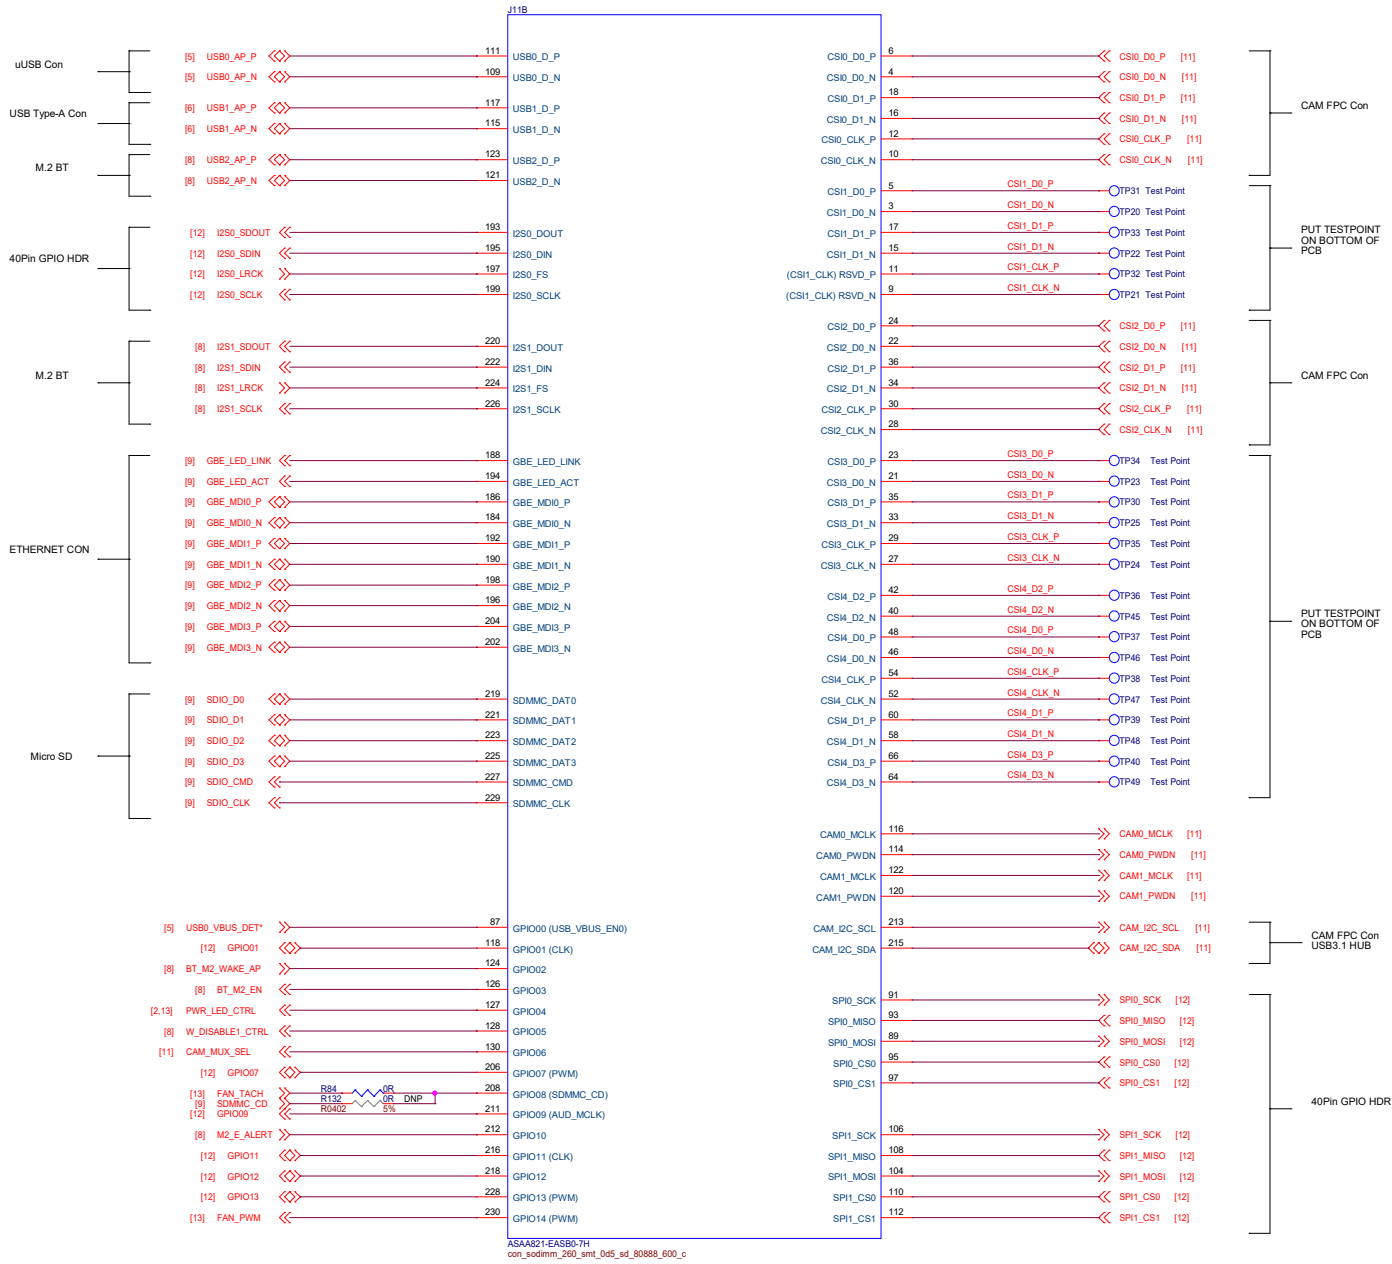

HDMI, DP, DSI, USBSS and PCIe

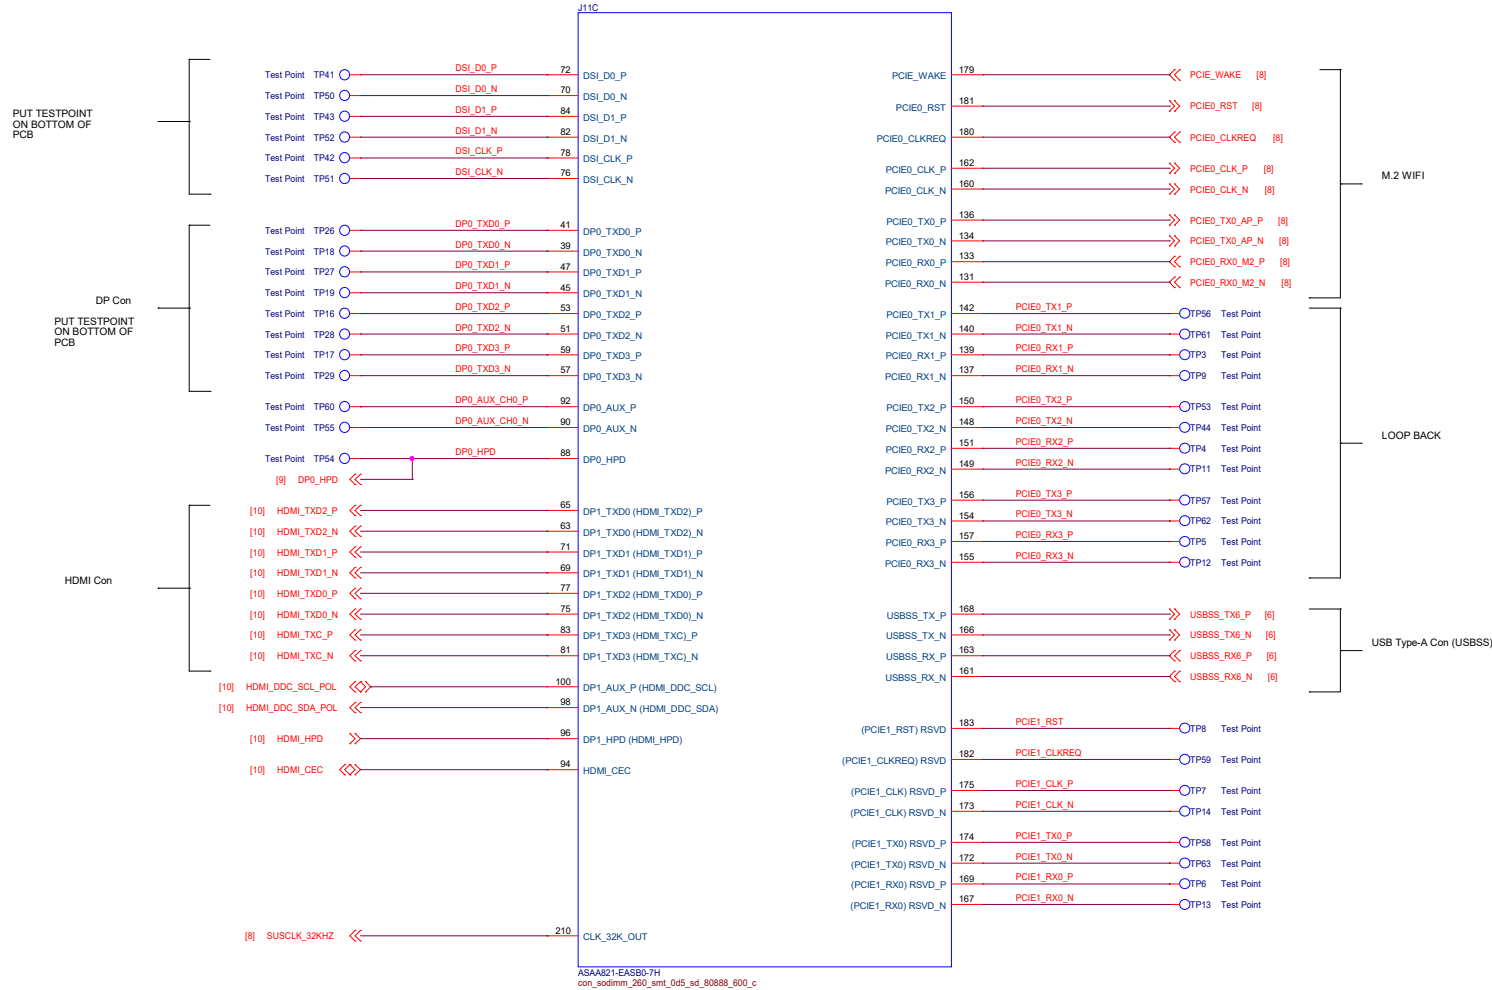

[illegible]

J2
USB2.0 Type C
USB2_0 TYPE C long

A4/B9/VBUS
A9/B4/VBUS

B9
B4

C4 100nF
16V,X7R
C0402

VDD_5V USB

D2 5.5V
D0402

R8 R0402 10K 5%

C5 4.7uF
10V,X5R
C0603 DNP

R14 10K 5%
R0402

Q3 MMST3904-7-F
SOT-323-3

A5 DAT CC1
B5 DAT CC2

R6 5.1K
R7 5.1K 5%

R0402

CC1
CC2

A7
B7

Type C_USB_DN

DN1
DN2

A6
B6

Type C_USB_DP

DP1
DP2

S1
S2
S3
S4
S5
S6

A1/B12/GND
A12/B1/GND

GND_SHD

SBU1
SBU2

A8
B8







B12
B1






ESDPSA0402V05
D3 5V
D0402

ESDPSA0402V05
D4 5V
D0402


[7] USB_MUX_SEL

[illegible][illegible]

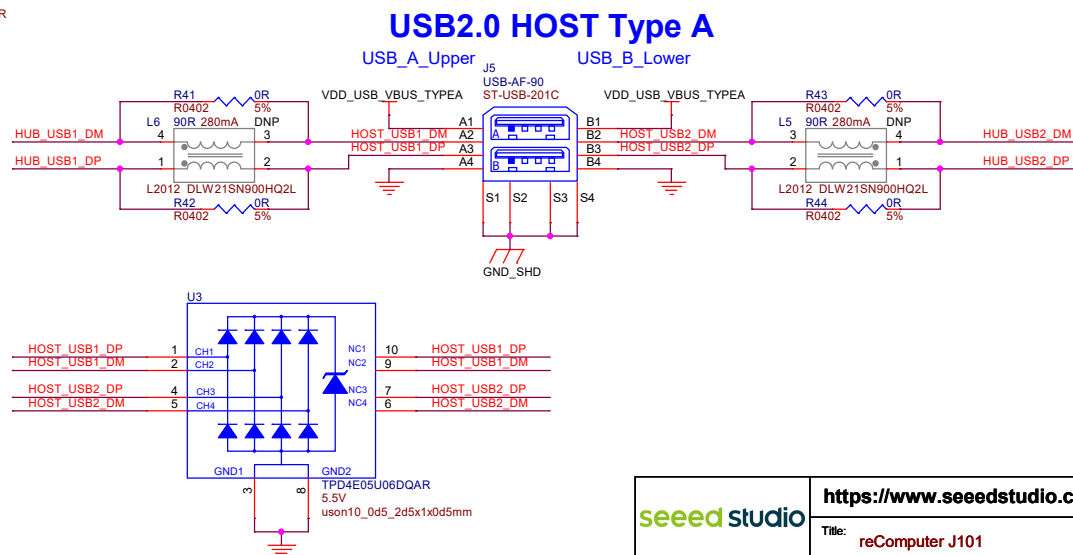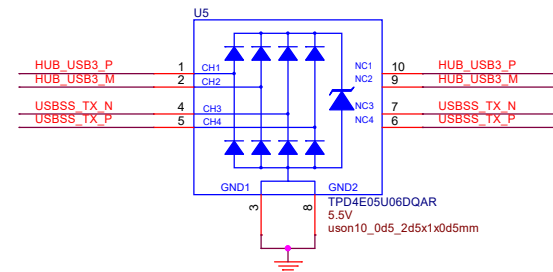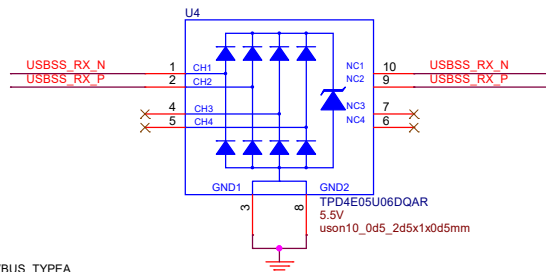
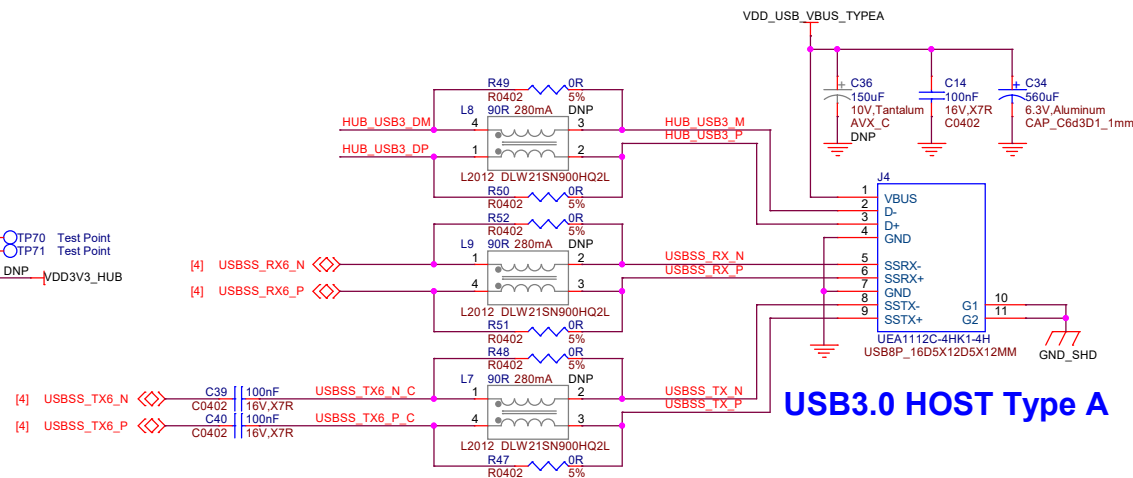
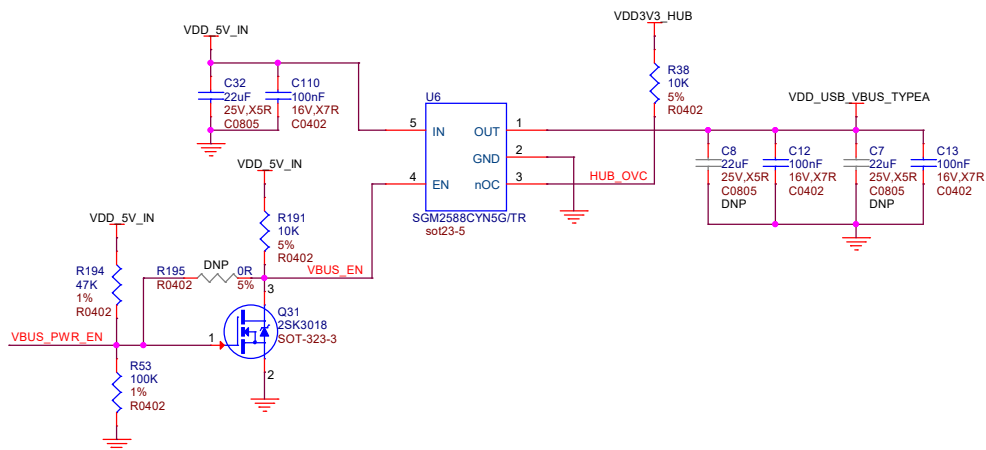
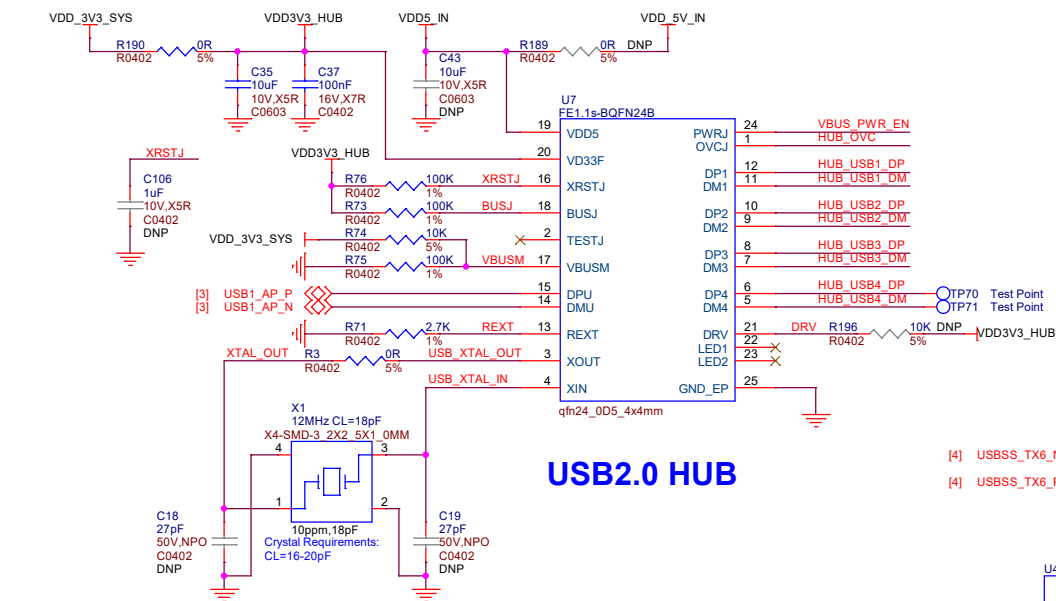


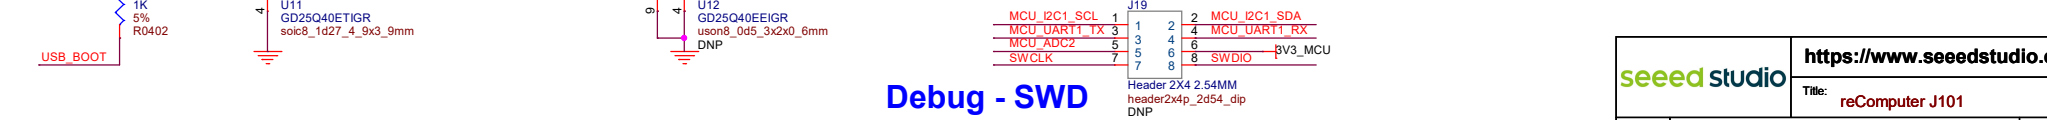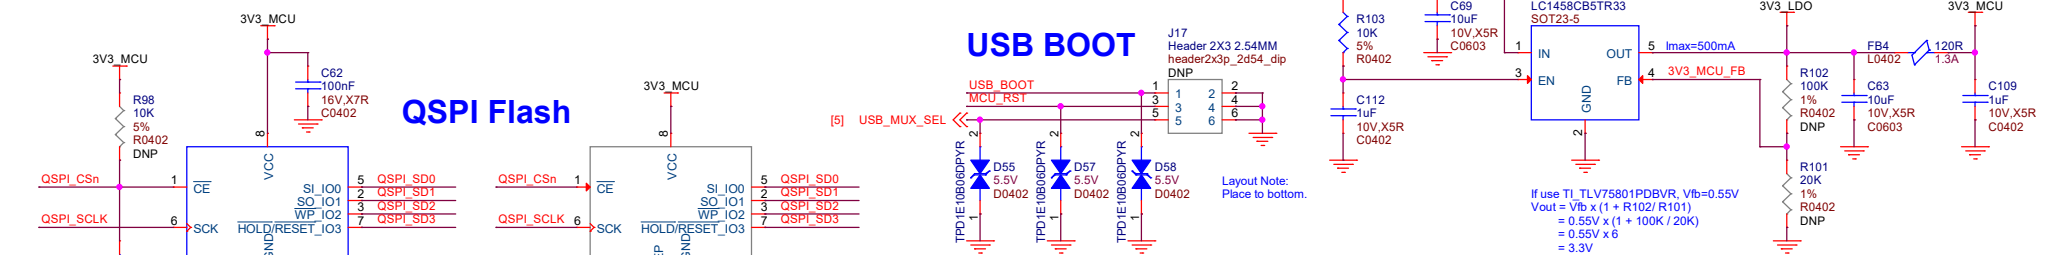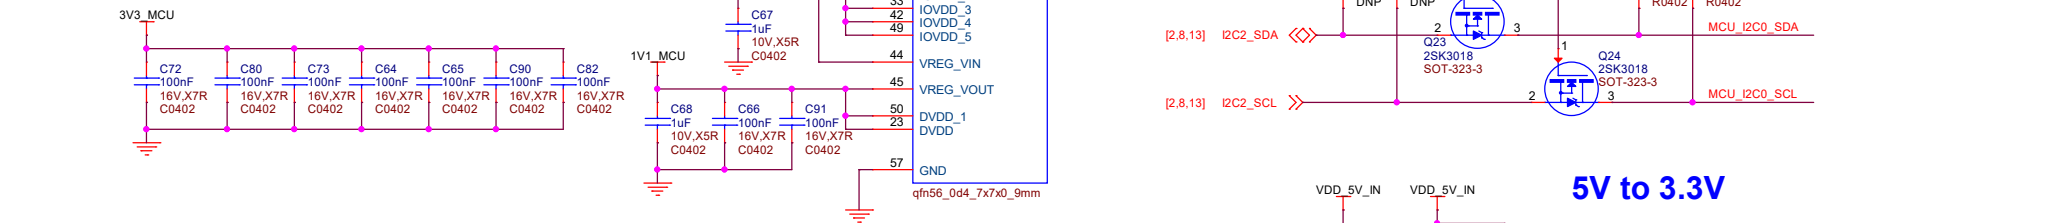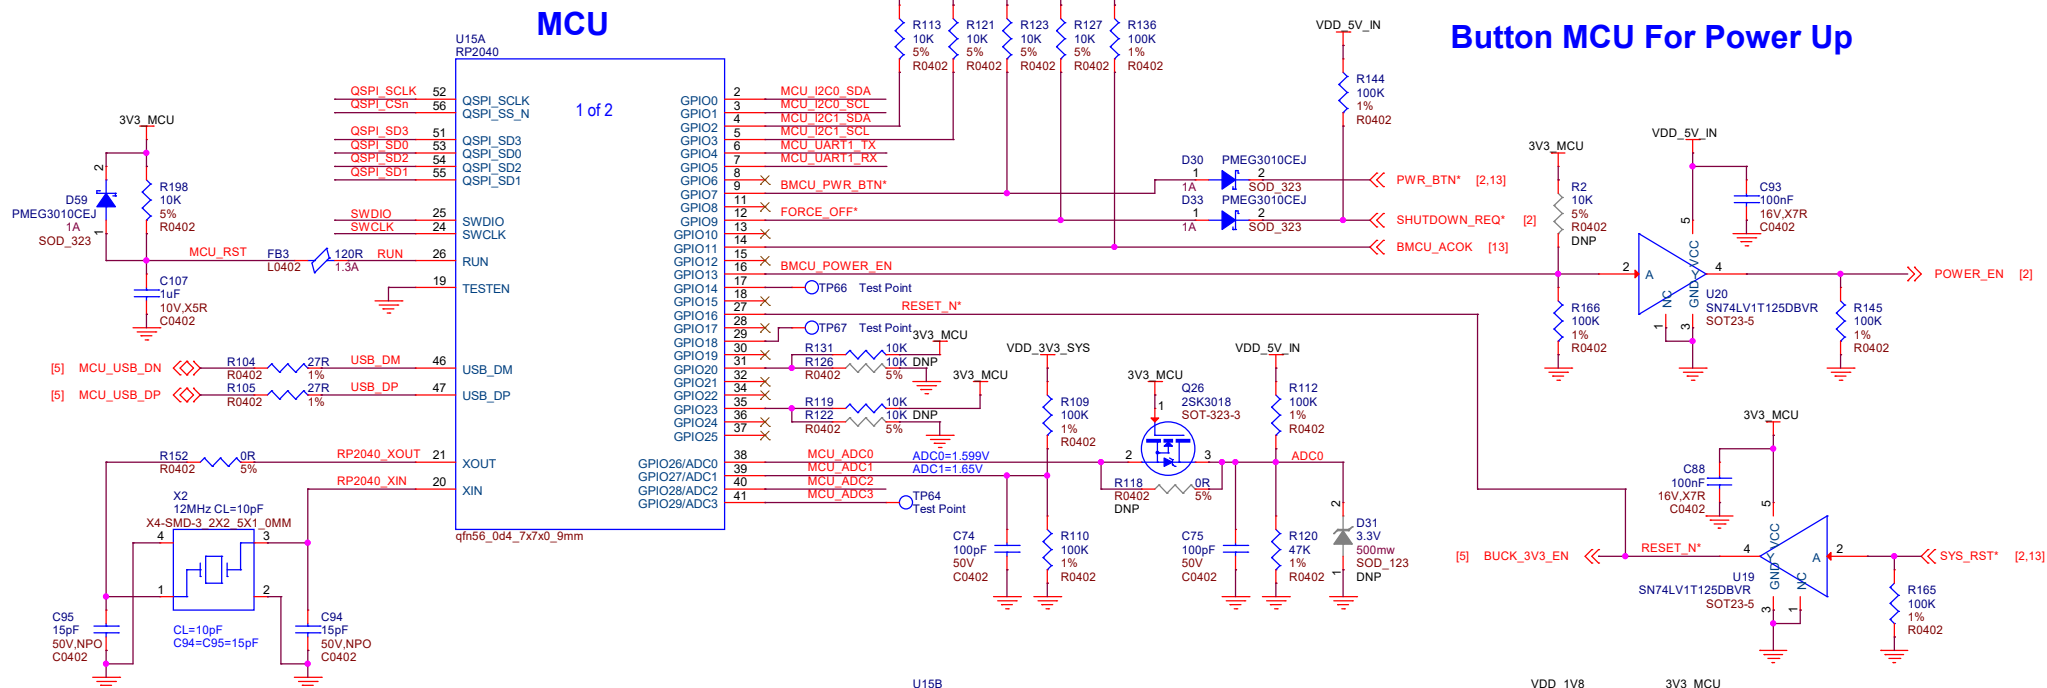

M.2 KEY E

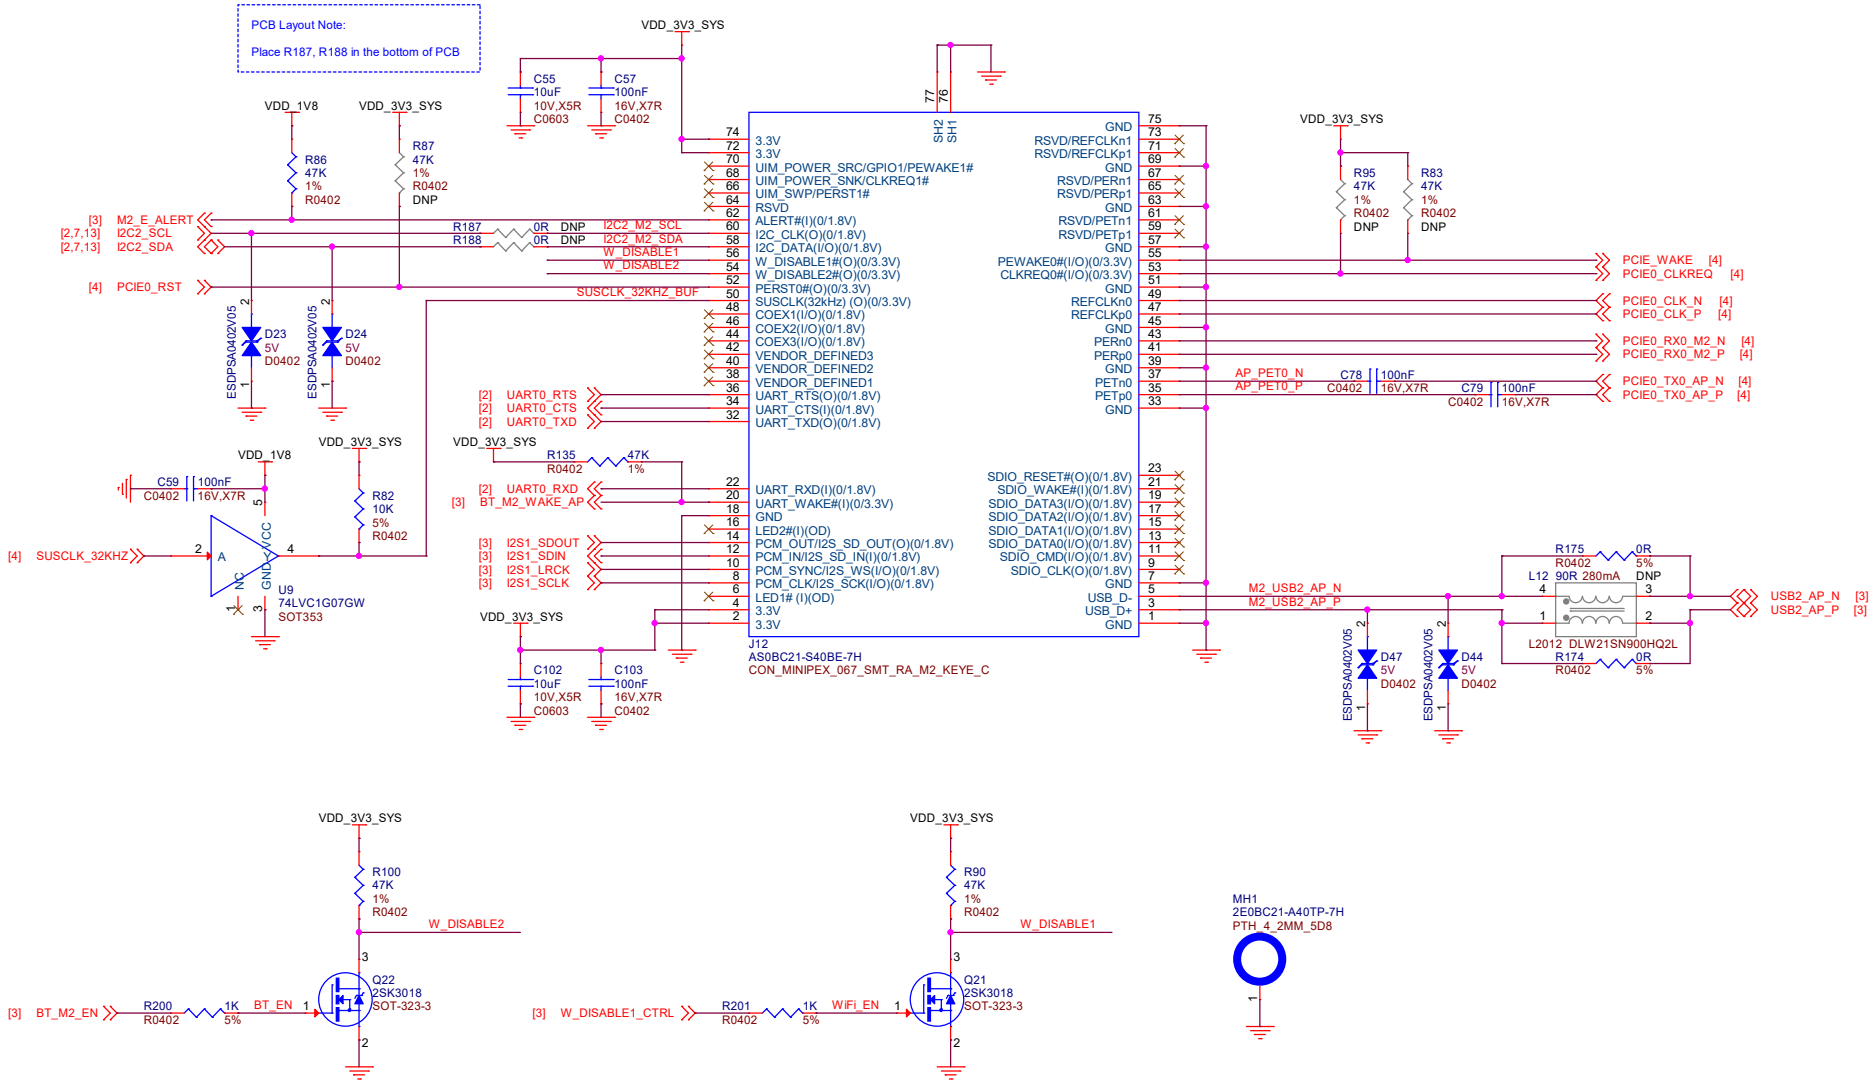


Gigabit Ethernet with PoE

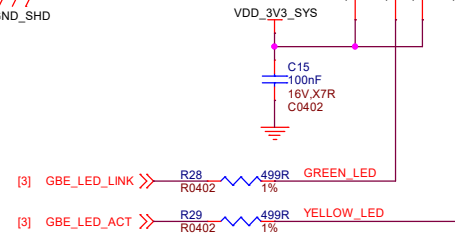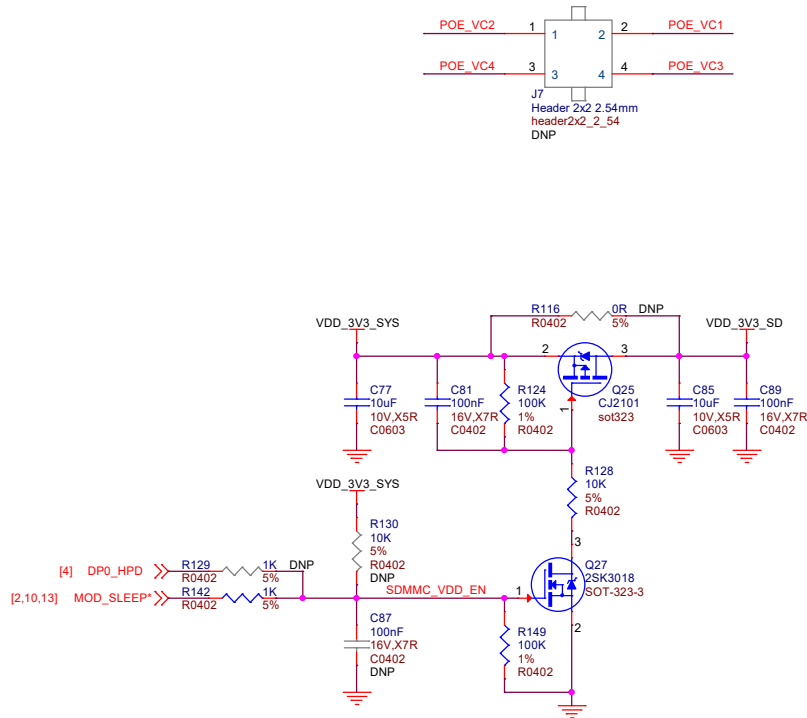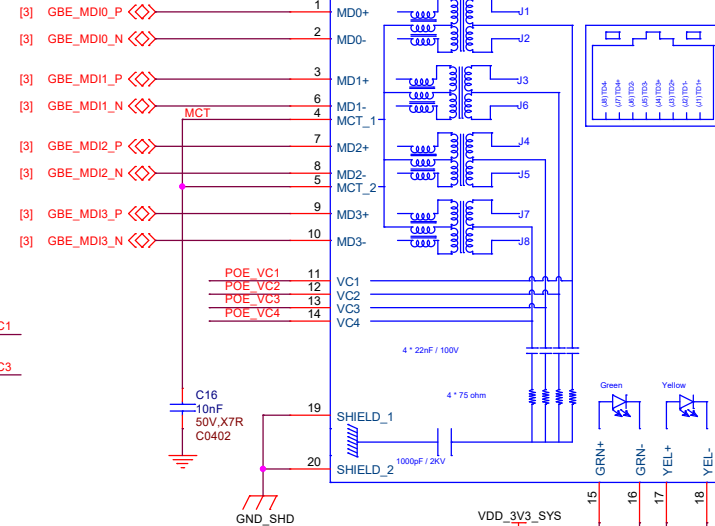



Silk: Micro SD

uSD Card Connector



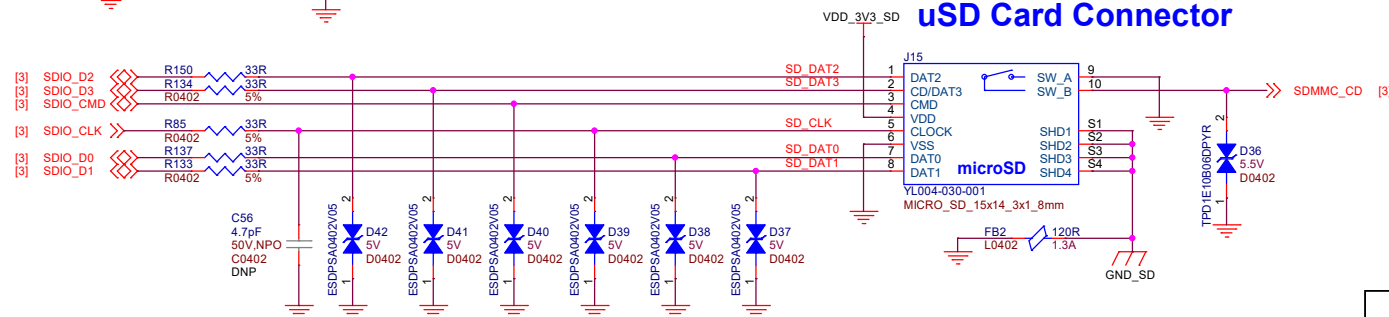


Place ESD near SD Card Connector








HDMI Connector

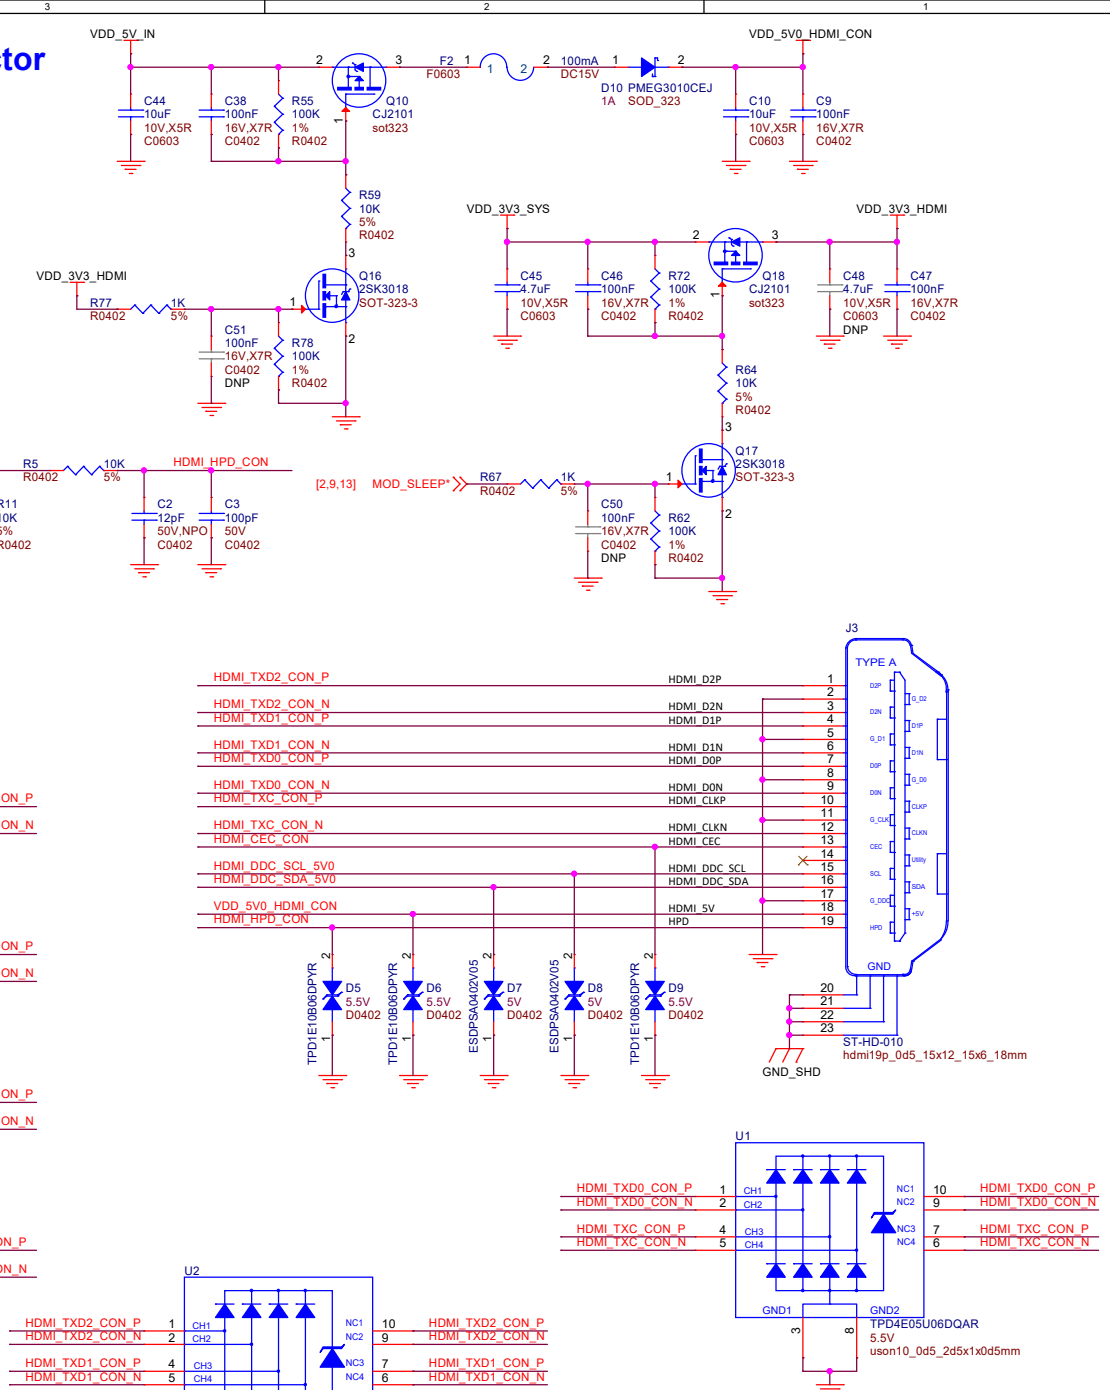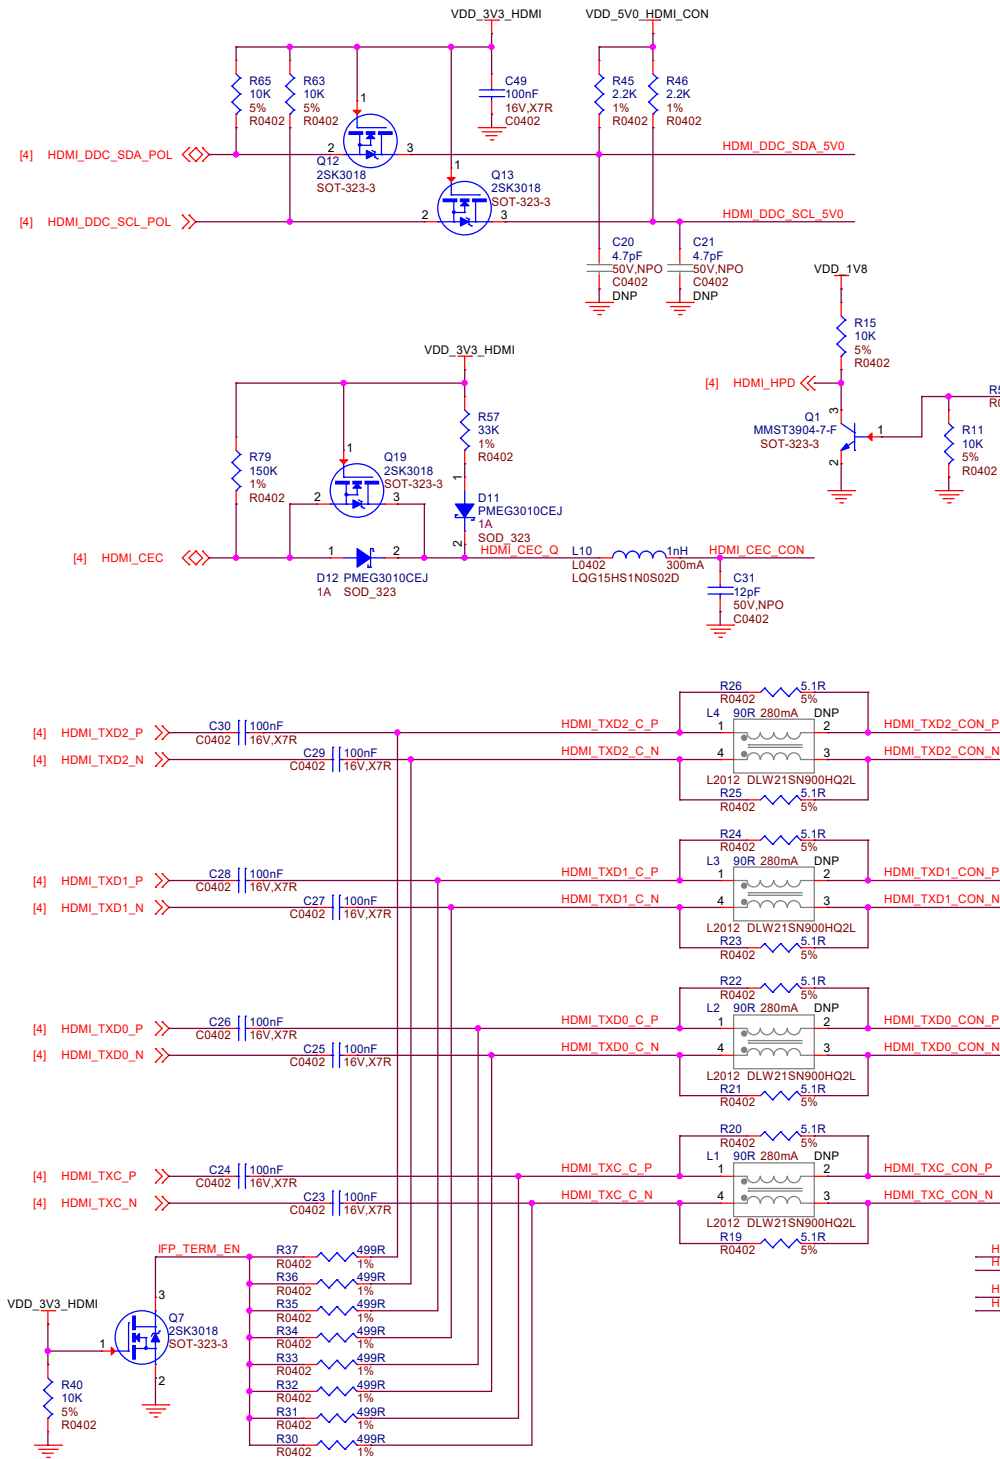


CSI CAM CONNECTOR

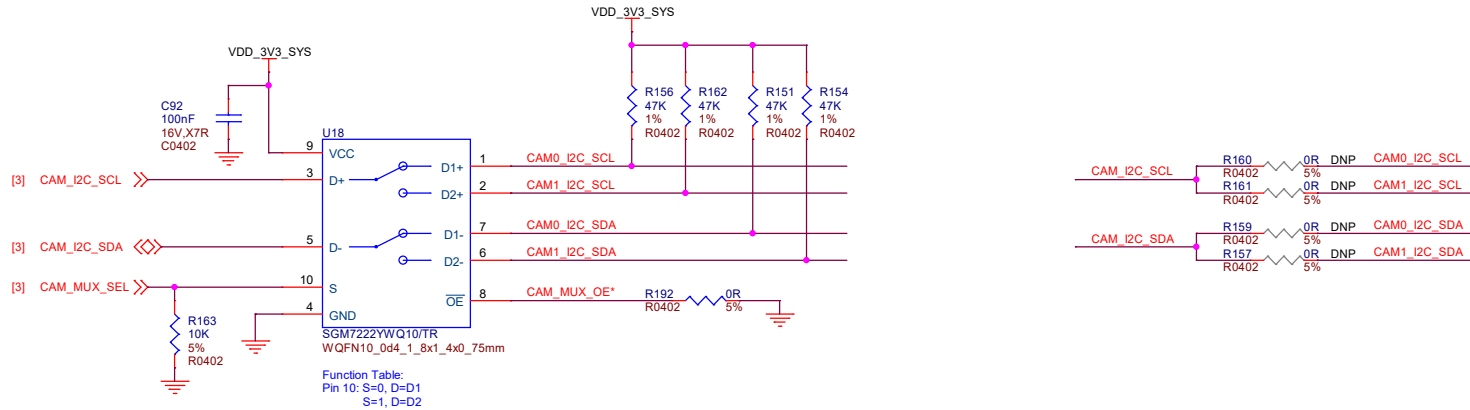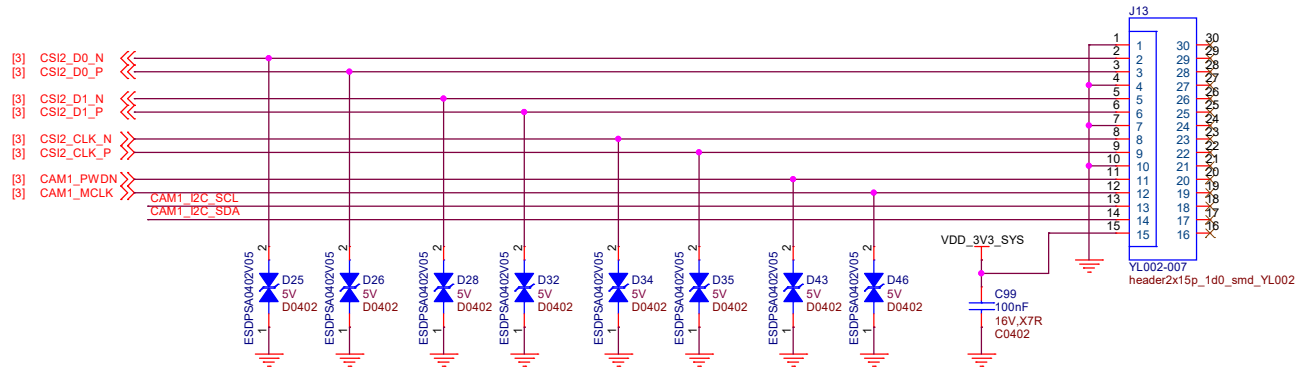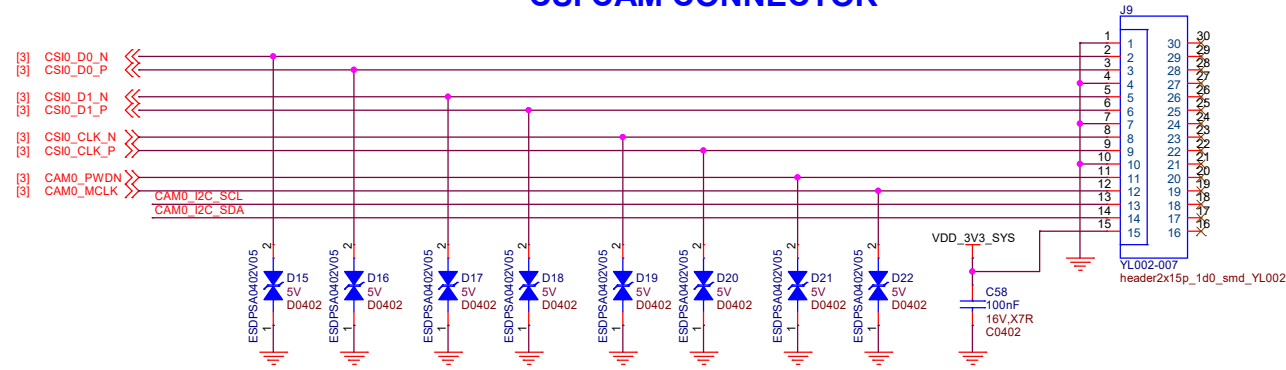


40PIN GPIO EXPANSION HEADER & LEVEL SHIFTERS

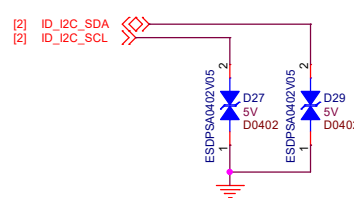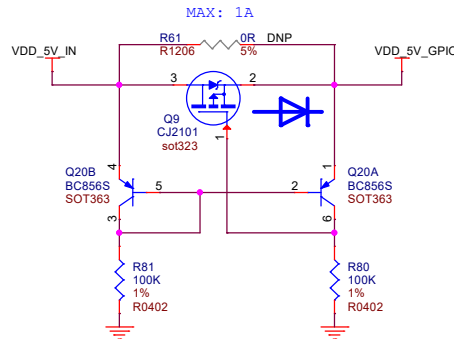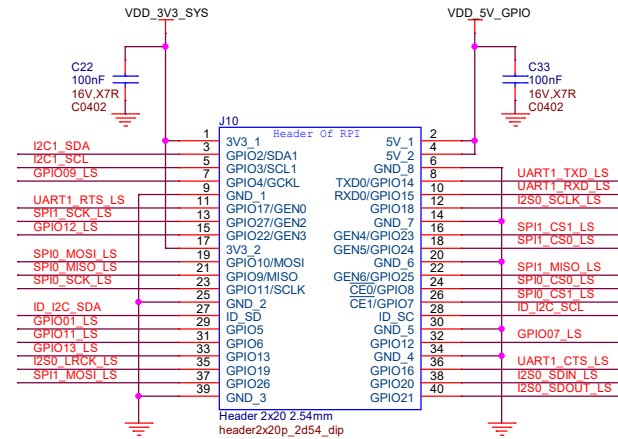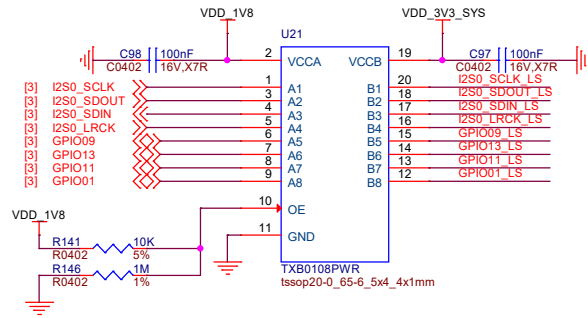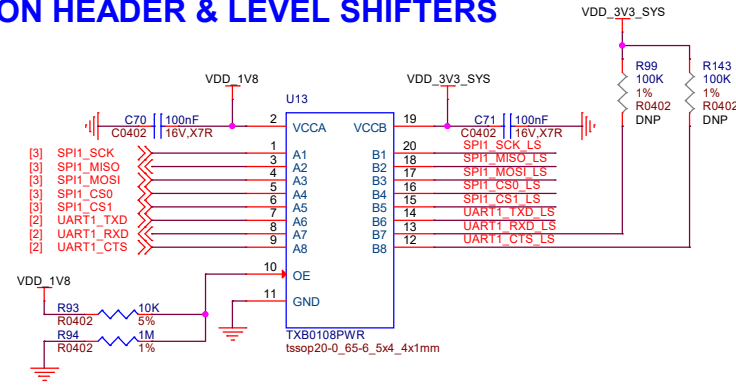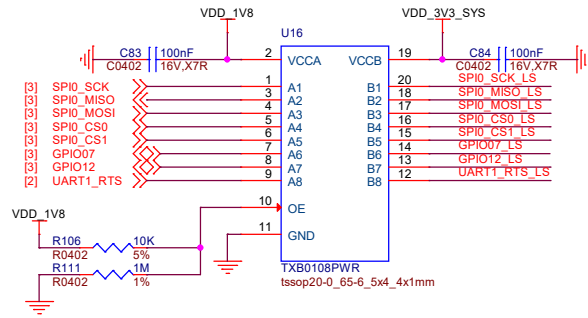


SoC Fan Header 4pin

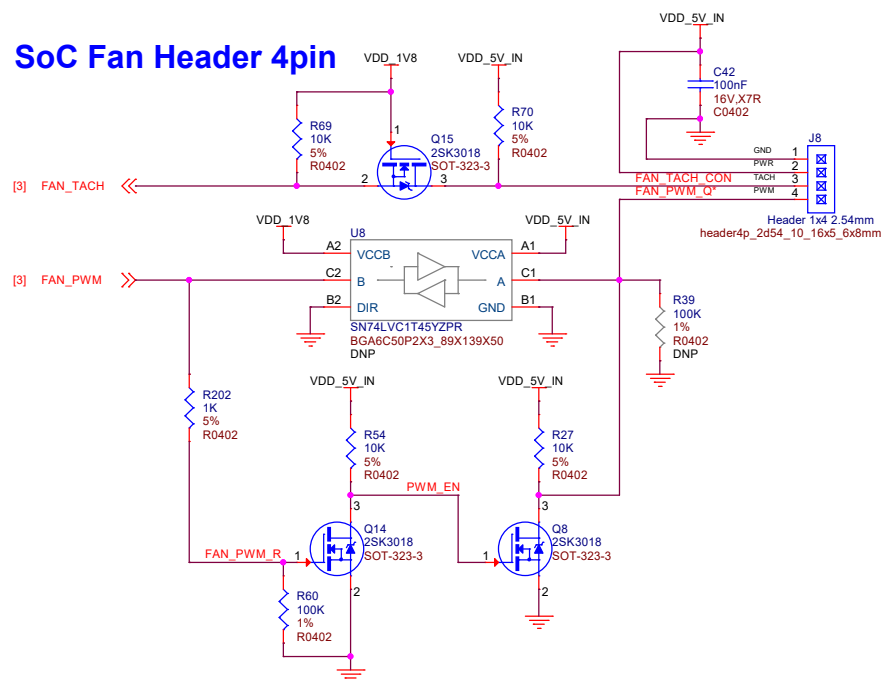

Carrier Board Config

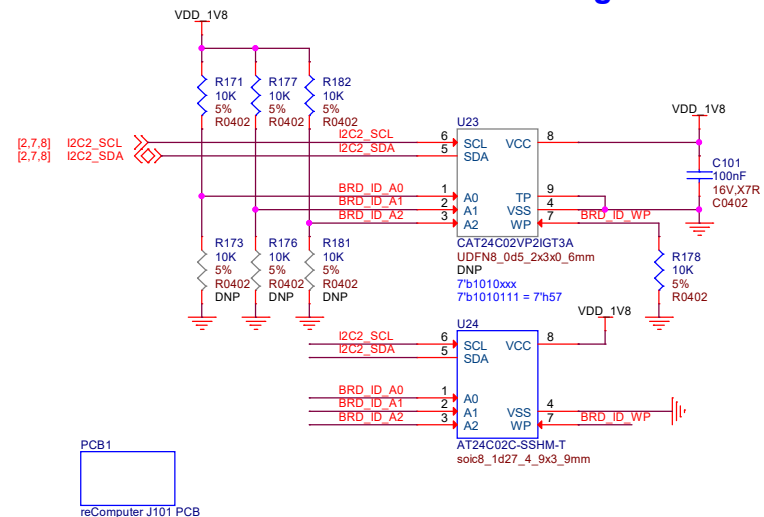

Serial Port

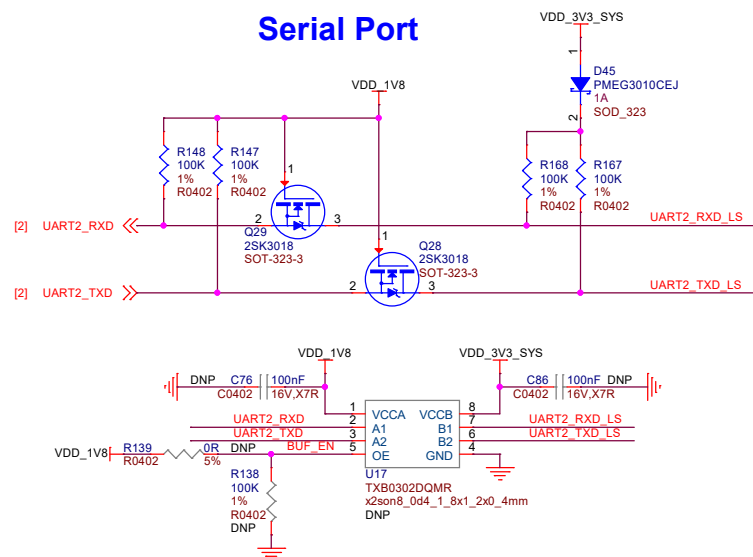

Optional Button Header Pinout

