

INDUSTRIAL PRODUCT DATASHEET

A203 Carrier Board for Jetson Nano/Xavier NX/TX2 NX with compact size and rich ports (Wifi, Bluetooth, SSD supported etc.)

The A203 Carrier Board: compact, lightweight, and cost-effective with rich ports and high-current plug for narrow-space AI and IoT applications.

SKU


114110047

UPDATED


2026-06-10 12:13:56

PRICE

\$179.00(Excl. VAT)

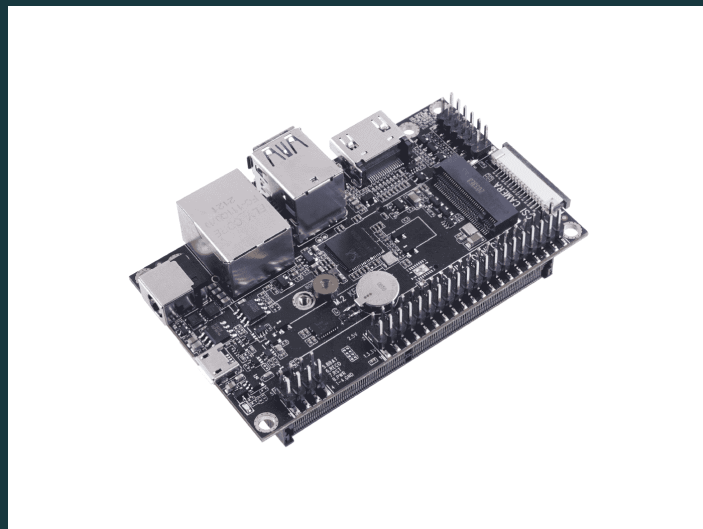

Overview


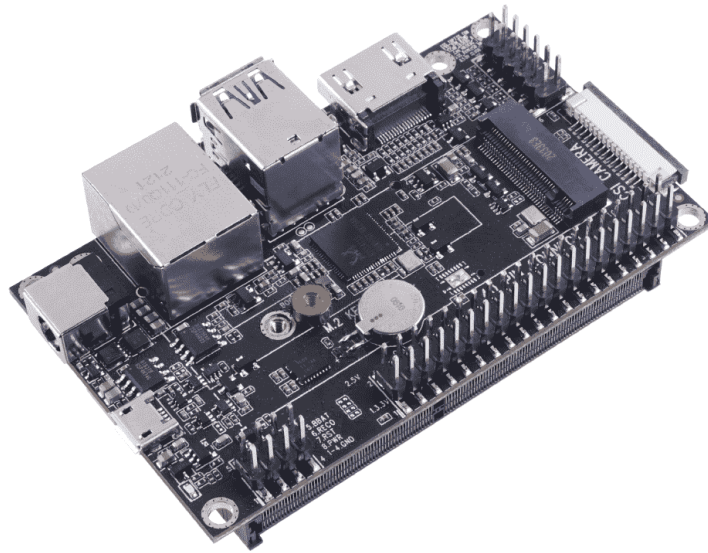


The A203 Carrier Board for Jetson Nano/Xavier NX/TX2 NX is a compact (87mm x 52mm x 26mm), lightweight (57g) solution with rich ports and compatibility with a large number of AI schemes. Equipped with an anti-fall aviation plug supporting high currents, it is a cost-effective choice for narrow operation environments, suitable for applications like home robots, UAVs, unmanned boats, drone, unmanned submarines, and sentiment analysis.

Key Features

- Compact size (87mm*52mm*26mm) saves precious space
- Lightweight (57g) good for small AI or IoT Application
- Rich ports, compatible with a large number of AI schemes
- Equipped with an anti-fall aviation plug that supports high currents
- Cost-effective, suitable for narrow and small operation environment

Product Gallery

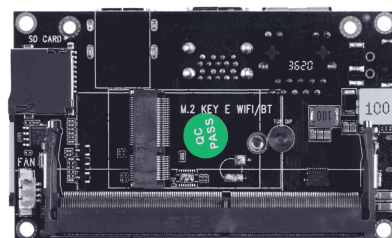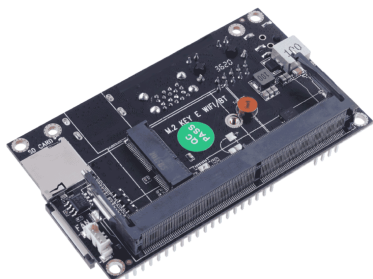

Specification

Connector	Description
HDMI Port	HDMI Right Angle Vertical Connector
USB 3.0 Type A	USB 3.0 Link 1 Type-A Connector
NVIDIA Gigabit Ethernet	RJ45 Gigabit Ethernet Connector (10/100/1000)
DC Power	DC Input Power TE Connector
USB 2.0 OTG	USB 2.0 Link 0 OTG Micro-AB Connector
FAN CONNECT	Picoblade Header
SD Card	1x MicroSD Card Slot
M.2 Key E	PCI-E 2230 Size
CSI Camera	1x MIPI CSI-2
Multifunctional port	2.0 PITCH 40 PIN
3V Lithium Battery	3V backup battery
M.2 Key M Disk	Disk size 2242
NVIDIA Jetson Nano/NX/TX2 NX	Nano/NX/TX2 NX 260 PIN Connector
Multifunctional port	2.0 PITCH 12 PIN (such as CAN)

Multifunctional port	2.0 PITCH 8 PIN (reset, recovery, etc.)
----------------------	---

Feature	A203 carrier board for NVIDIA® Jetson™ Nano/NX/TX2 NX	A203 V2 carrier board for NVIDIA® Jetson™ Nano/NX/TX2 NX	A205 carrier board for NVIDIA® Jetson™ Nano/NX/TX2 NX	A 2 0 6 c a r r i e r b o a r d f o r N V I D I A ® J e t s o n ™ N a n o / N X / T X 2 N X
---------	---	--	---	--

Module Compatibility	NVIDIA® Jetson™ Nano/NX/TX2 NX	NVIDIA® Jetson™ Nano/NX/TX2 NX	NVIDIA® Jetson™ Nano/NX/TX2 NX	N V I D I A ® J e t s o n ™ N a n o / N X / T X 2 N X
PCB Size / Overall Size	87mm*52mm	87mm*52mm	170mm*100mm	1 0 0 m m * 8 0 m m
Display	1*HDMI	1*HDMI	2*HDMI	1 * H D M I + 1 * D P
CSI Camera	1*CSI	1*CSI	6*CSI	2 * C S I

Ethernet	1x Gigabit Ethernet (10/100/1000M)	1x Gigabit Ethernet (10/100/1000M)	2x Gigabit Ethernet (10/100/1000M)	1x Gigabit Ethernet (10/100/1000M)
----------	------------------------------------	------------------------------------	------------------------------------	------------------------------------

USB		1* USB 3.0 0.5mm pitch 20Pin ZIF		
	2* USB 3.0 Type-A (Integrated USB 2.0);	2* USB 3.0 Type-A (Integrated USB 2.0);	4* USB 3.0 Type-A (Integrated USB 2.0);	4* USB 3.0 Type-A (Integrated USB 2.0);
	1* USB Micro B(Not support power input)	1* USB Micro B(Not support power input)	1* USB 2.0 Type C(Support OTG)	1* USB Micro B (Not support power input)
SATA	\	\	5 SATA	\

M.2 Key M	1*M.2 Key M	1*M.2 Key M	\	1 * M · 2 K e y M
M.2 Key E	1*M.2 Key E	1*M.2 Key E	1*M.2 Key E	1 * M · 2 K e y E
TF_Card	1* TF_Card Slot	1* TF_Card Slot	1* TF_Card Slot	\
USB WIFI Mode	\	\	1* Standard USB WIFI Mode(4 pin interface)	\
Audio	\	\	1* Audio Jack;	\
			2* Microphone interface;	
			2* Speaker interface	
SPI Bus	2* SPI Bus(+3.3V Level)	2* SPI Bus(+3.3V Level)	2* SPI Bus(+3.3V Level)	2 * S P I B u s (+ 3 · 3 V L e v e l)
FAN	1* FAN(5V PWM)	1* FAN(5V PWM)	2* Fan(12V/5V);	1 * F A N (5 V P W M)
			1* FAN(5V PWM)	
CAN	1* CAN	1* CAN	1* CAN	1 * C A N
Multifunctional port	1* 40-Pin	1* 40-Pin	1* 40-Pin	1 * 4 0 - P i n

RTC	Battery included	Battery not included	Battery not included	Battery not included
Operating Temperature	-25° to +65°	-25° to +65°	-25° to +80°	-25° to +80°

Applications

- Home robots
- UAVs
- Unmanned boats
- Drone
- Unmanned submarines
- Sentiment Analysis

Part List

Connector	Description
HDMI Port	HDMI Right Angle Vertical Connector
USB 3.0 Type A	USB 3.0 Link 1 Type-A Connector
NVIDIA Gigabit Ethernet	RJ45 Gigabit Ethernet Connector (10/100/1000)
DC Power	DC Input Power TE Connector
USB 2.0 OTG	USB 2.0 Link 0 OTG Micro-AB Connector
FAN CONNECT	Picoblade Header
SD Card	1x MicroSD Card Slot
M.2 Key E	PCI-E 2230 Size
CSI Camera	1x MIPI CSI-2
Multifunctional port	2.0 PITCH 40 PIN
3V Lithium Battery	3V backup battery
M.2 Key M Disk	Disk size 2242
NVIDIA Jetson Nano/NX/TX2 NX	Nano/NX/TX2 NX 260 PIN Connector
Multifunctional port	2.0 PITCH 12 PIN (such as CAN)
Multifunctional port	2.0 PITCH 8 PIN (reset, recovery, etc.)

Feature	A203 carrier board for NVIDIA® Jetson™ Nano/NX/TX2 NX	A203 V2 carrier board for NVIDIA® Jetson™ Nano/NX/TX2 NX	A205 carrier board for NVIDIA® Jetson™ Nano/NX/TX2 NX	A206 carrier board for NVIDIA® Jetson™ Nano/NX/TX2 NX
Module Compatibility	NVIDIA® Jetson™ Nano/NX/TX2 NX	NVIDIA® Jetson™ Nano/NX/TX2 NX	NVIDIA® Jetson™ Nano/NX/TX2 NX	NVIDIA® Jetson™ Nano/NX/TX2 NX
PCB Size / Overall Size	87mm*52mm	87mm*52mm	170mm*100mm	100mm*80mm
Display	1*HDMI	1*HDMI	2*HDMI	1*HDMI+1*DP
CSI Camera	1*CSI	1*CSI	6*CSI	2*CSI
Ethernet	1x Gigabit Ethernet (10/100/1000M)	1x Gigabit Ethernet (10/100/1000M)	2x Gigabit Ethernet (10/100/1000M)	1x Gigabit Ethernet (10/100/1000M)
USB		1* USB 3.0 0.5mm pitch 20 Pin ZIF		
	2* USB 3.0 Type-A (Integrated USB 2.0);	2* USB 3.0 Type-A (Integrated USB 2.0);	4* USB 3.0 Type-A (Integrated USB 2.0);	4* USB 3.0 Type-A (Integrated USB 2.0);
	1* USB Micro B(Not support power input)	1* USB Micro B(Not support power input)	1* USB 2.0 Type C(Support OTG)	1* USB Micro B(Not support power input)
SATA	\	\	5 SATA	\
M.2 Key M	1*M.2 Key M	1*M.2 Key M	\	1*M.2 Key M
M.2 Key E	1*M.2 Key E	1*M.2 Key E	1*M.2 Key E	1*M.2 Key E
TF_Card	1* TF_Card Slot	1* TF_Card Slot	1* TF_Card Slot	\
USB WIFI Mode	\	\	1* Standard USB WIFI Module(4 pin interface)	\
Audio	\	\	1* Audio Jack;	\
			2* Microphone interface;	
			2* Speaker interface	
SPI Bus	2* SPI Bus(+3.3V Level)	2* SPI Bus(+3.3V Level)	2* SPI Bus(+3.3V Level)	2* SPI Bus(+3.3V Level)
FAN	1* FAN(5V PWM)	1* FAN(5V PWM)	2* Fan(12V/5V);	1* FAN(5V PWM)

			1* FAN(5V PWM)	
CAN	1* CAN	1* CAN	1* CAN	1* CAN
Multifunctional port	1* 40-Pin	1* 40-Pin	1* 40-Pin	1* 40-Pin
RTC	Battery included	Battery not included	Battery not included	Battery not included
Operating Temperature	-25° to +65°	-25° to +65°	-25° to +80°	-25° to +80°

Compliance & Logistics



HSCODE	8543909000
USHSCODE	8543903500
UPC	
EUHSCODE	8543709099
COO	CHINA

Resource Links

- <https://www.seeedstudio.com/A203-Carrier-Board-for-Jetson-Nano-Xavier-NX-p-5131.html>
- [A203 Top View.dwg](#)
- [A203 Bottom View.dwg](#)
- [A203_Pin_Description.pdf](#)

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com