

INDUSTRIAL PRODUCT DATASHEET

reServer J2032 - NVIDIA® Jetson Xavier™ NX 16GB AI NVR for Video Analytics, 256GB SATA3 SSD, 2.5 GbE, supports 4G/5G/LoRaWAN, pre-installed Jetpack

Compact edge AI server with NVIDIA® Jetson Xavier™ NX 16GB delivering 21 TOPS for AI-enabled NVR and intelligent video analytics.

SKU

110061403

UPDATED

2026-09-04 01:07:01

PRICE

\$1199.00(Excl. VAT)



Overview





The reServer J2032 is a compact edge AI server powered by an NVIDIA® Jetson Xavier™ NX 16GB module, delivering 21 TOPS AI performance with a 6-core NVIDIA Carmel ARM®v8.2 64-bit CPU and 384-core NVIDIA Volta™ GPU with 48 Tensor Cores. It is designed for AI-enabled NVR, intelligent video analytics, AMR, and logistics automation, with 256GB SATA3 SSD, 2.5 GbE, and support for 4G/5G/LoRaWAN.

Key Features

- **Compact design:** Edge AI server with an overall dimension of 132mm*124mm*233mm
- **Powerful AI module:**
 - NVIDIA® Jetson Xavier™ NX 16GB
 - Delivers 21 TOPS AI performance
 - 6-core NVIDIA Carmel ARM@v8.2 64-bit CPU 6MB L2 + 4MB L3
 - 384-core NVIDIA Volta™ GPU with 48 Tensor Cores

Product Gallery

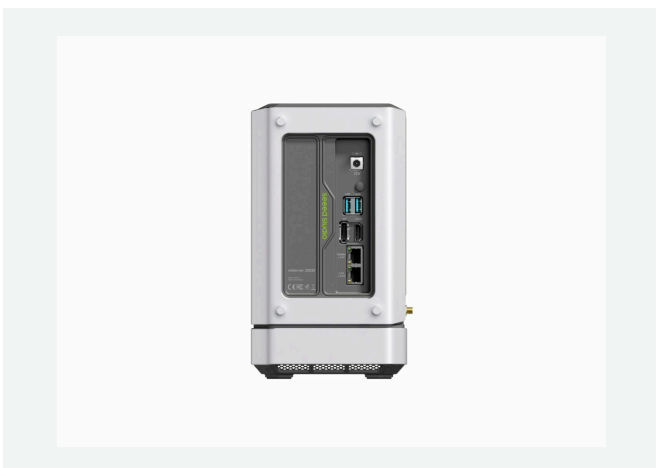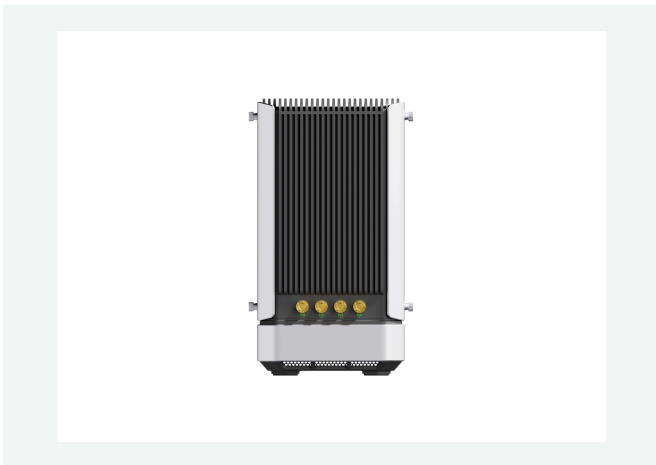

Specification

Processor	Module	NVIDIA® Jetson Xavier™ NX 16GB
	AI Perf	21 TOPS
	GPU	NVIDIA Volta architecture with 384 NVIDIA CUDA® cores and 48 Tensor cores
	CPU	6-core NVIDIA Carmel ARM®v8.2 64-bit CPU 6 MB L2 + 4 MB L3
	DL Accelerator	2x NVDLA Engines
	Vision Accelerator	7-Way VLIW Vision Processor
	Memory	8 GB 128-bit LPDDR4x @ 51.2GB/s
	Storage	16 GB eMMC 5.1; Support 2 x 2.5"/3.5" SATA (HDD/SSD), up to SATA3 (2.5 inch 256GB SSD x1, up to SATA3 already installed)
	Video Encoder	2x 4K60 4x 4K30 10x 1080p60 22x 1080p30 (H.265) 2x 4K60 4x 4K30 10x 1080p60 20x 1080p30 (H.264)
	Video Decoder	2x 8K30 6x 4K60 12x 4K30 22x 1080p60 44x 1080p30 (H.265) 2x 4K60 6x 4K30 10x 1080p60 22x 1080p30 (H.264)
	Co-processor	Raspberry Pi® RP2040 32-Bit Dual ARM Cortex-M0+ @ 133MHz
External I/O	2.5G Ethernet Port	Converted from PCIe RX: 2.35 Gbits/sec TX: 1.4 ~ 1.6 Gbits/sec
	1000M Ethernet Port	Native Ethernet interface of Jetson Xavier NX
	HDMI Interface	Support up to HDMI2.0
	DisplayPort Interface	Support up to DP1.4
	USB3.1 GNE2 Interface x2	Support up to 10Gbit
	DC Jack Power Interface	DC 12V @5A, 2.5mm center pin

Internal I/O	M.2 KEY B Connector	With USB3.2 GEN2, Support 5G/4G wireless module
	Mini-PCIe Connector	Support LoRa/Serial wireless module
	SIM Card Slot	Top layer for Mini-PCIe
		Bottom layer for M.2
	SATA Power Connector x2	Support 2.5inch or 3.5inch HDD/SSD, up to SATA3
	SATA Data Connector x2	
	Main Fan Connector	For enclosure fan, only supports 12V fans, the bottom fan is already installed
	Jetson Xavier NX Fan Connector	Only supports 5V fans, aluminium heatsink cooling fan already installed
	RTC Battery Connector	RTC battery already installed (CR2032)
	260Pin SODIMM Connector	For Jetson Xavier NX
	USB TYPE-C Connector for NX	For NX programming
	USB TYPE-C Connector for Coprocessor	For coprocessor firmware upgrade
	AutoPower on Header	Short-circuit to enter key-on mode, float into the auto power-on mode
	2x5Pin Debug Header	Debug
	Power Button	With green LED
	Active Buzzer	
Network	Giga Ethernet	2.5G Ethernet Port - rx: 2.35 Gbits/sec - tx: 1.4 ~ 1.6 Gbits/sec
		1000M Ethernet Port
	Wireless Connection	M.2 KEY B connector, support 5G/4G wireless module Mini-PCIe connector, support LoRa/Serial wireless module
Display	LED1: SATA0 statusLED	Sleep mode or no SSD/HDD inserted-----LED OFF SSD/HDD inserted and PHY ready ----- LED ON Data transfer status ----- LED blinks
	LED2: SATA1 statusLED	
	LED3	M.2 wireless module status LED
Power	DC Jack Power interface	DC 12V @5A, 2.5mm center pin
	Power Button	Power on
	Restart Button	Restart
Pre-installed	2.5 inch 256GB SSD x1, up to SATA3	
	Aluminum Heatsink Cooling Fan	
	RTC battery (CR2032)	
	Bottom Fan	
Dimensions	132mm*124mm*233mm	

Applications

- **AI-enabled NVR(Network Video Recorder)**
- **Intelligent Video Analytics**
- **AMR**
- **Logistics Automation**

Part List

Item	Qty	
reServer J2032	1	
NVIDIA® Jetson Xavier NX™ 16GB		
Carrier Board		
Pre-stalled 2.5 inch 256GB SSD		
RTC Battery (CR2032)		
Aluminum Heatsink Cooling Fan		
Bottom Fan		
Aluminum Case		
12V/5A Power Adapter(without AC Power Cord)	1	
User Manual	1	
Screwdriver	1	

Compliance & Logistics



HSCODE	8471419000
USHSCODE	8517180050
UPC	
EUHSCODE	8471707000
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- <https://www.seeedstudio.com/reServer-Jetson-20-1-H2-p-5337.html>
- [reServer Jetson Assembly Guide](#)
- [reServer J2032 datasheets. PDF](#)

Seeed Technology Co.,Ltd.

9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676

Web: www.seeed.cc

Shop: www.seeedstudio.com