

Schematic: reComputer J202



SHEET	SHEET NAME
01	Table of Contents
02	Block Diagram
03	Power Tree
04	SODIMM Connector 1/3
05	SODIMM Connector 2/3
06	SODIMM Connector 3/3
07	Power In
08	1V8 LDO & 3V3 AO Rails
09	Button MCU For Power Up
10	USB3.1 HUB
11	USB3.1 Type-A x2 (A)
12	USB3.1 Type-A x2 (B)
13	HDMI
14	Display Port
15	CAM Connector
16	Gigabit Ethernet, Type C
17	M.2 KEY-E (WIFI/BT)
18	M.2 KEY-M (NVME)
19	40Pin GPIO Expansion Header
20	Fan, Debug and EEPROM

Revision History


VER	DATE	REVISION	DESCRIPTION
V1.0	06/09/2022	reComputer J202_V1.0_SCH_220609	Initial Release.
V1.0	10/20/2023	reComputer J202_V1.0_SCH_231020	Page 09:Changed R185 from 499R to 0R; Changed X1 12MHz from CL=18pF to CL=10pF; Changed C147,C157 from 27pF to 12pF.
V1.0	01/29/2024	reComputer J202_V1.0_SCH_240129	Page 04:Changed C37,C38,C48 from 330uF/6.3V to 220uF/6.3V
V1.0	08/05/2024	reComputer J202_V1.0_SCH_240805	Page 18:Changed the OSC1 from 1631-L3273-BTBQYA to TS00032044.

BLOCK DIAGRAM


Map Legend:

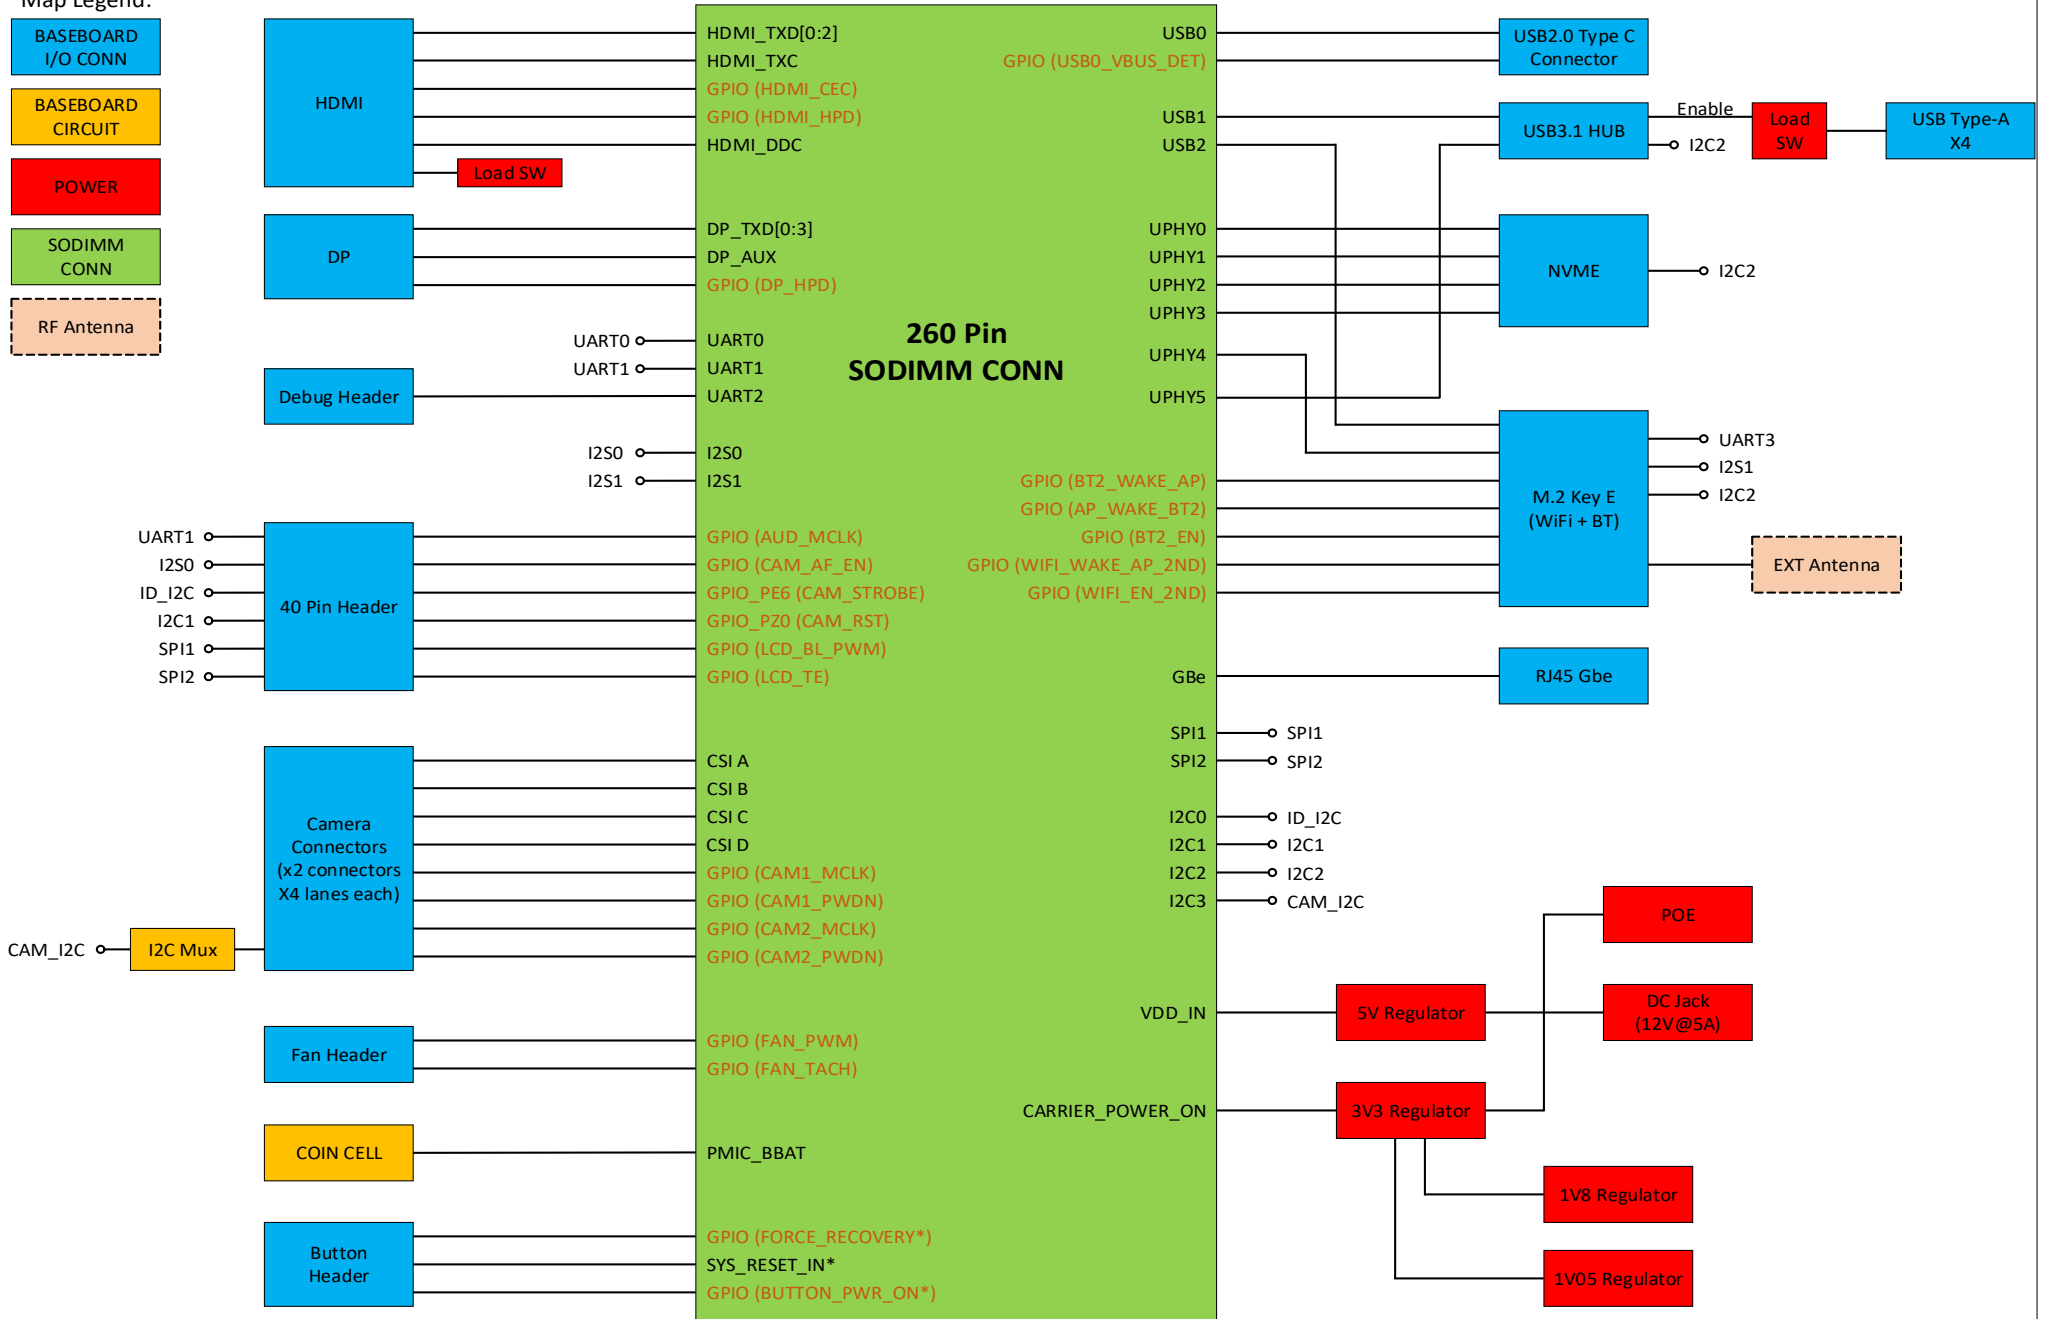


Power Topology

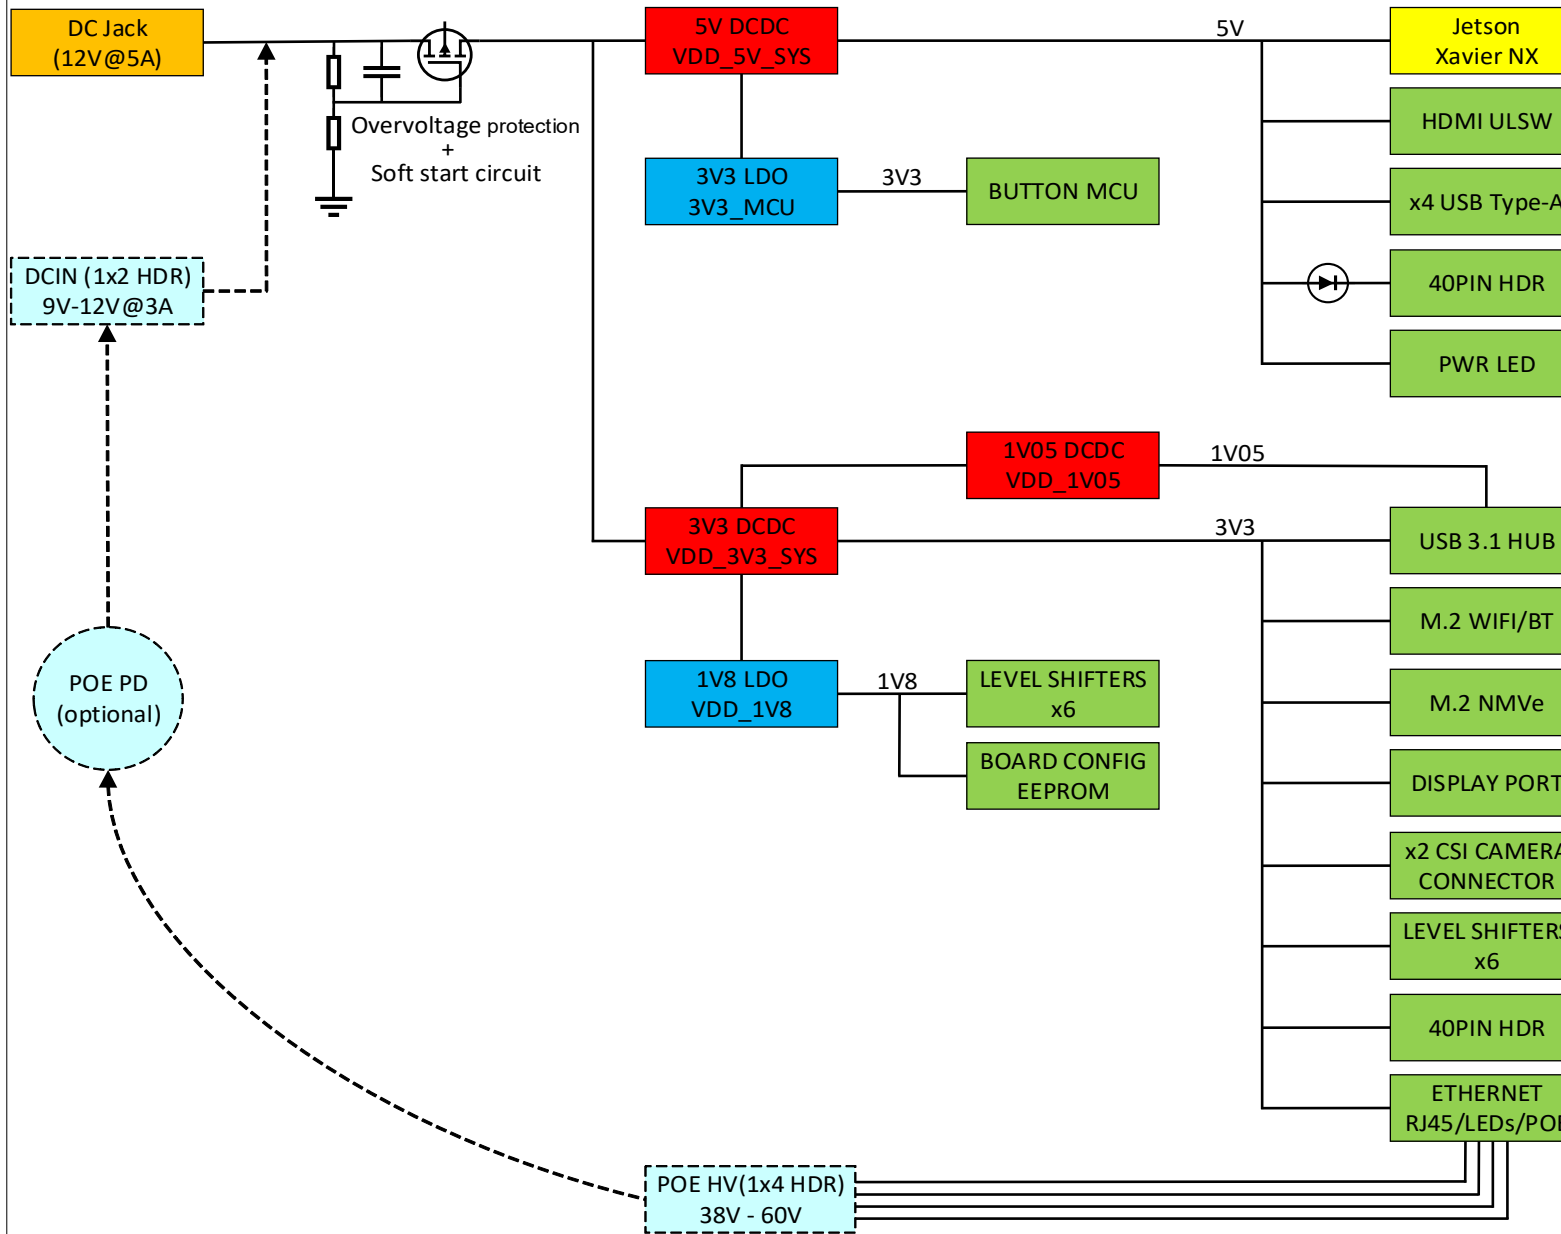



Map Legend:

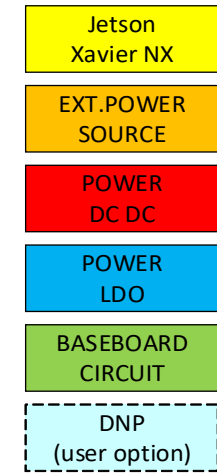


UART, I2C, CAN and GPIOs



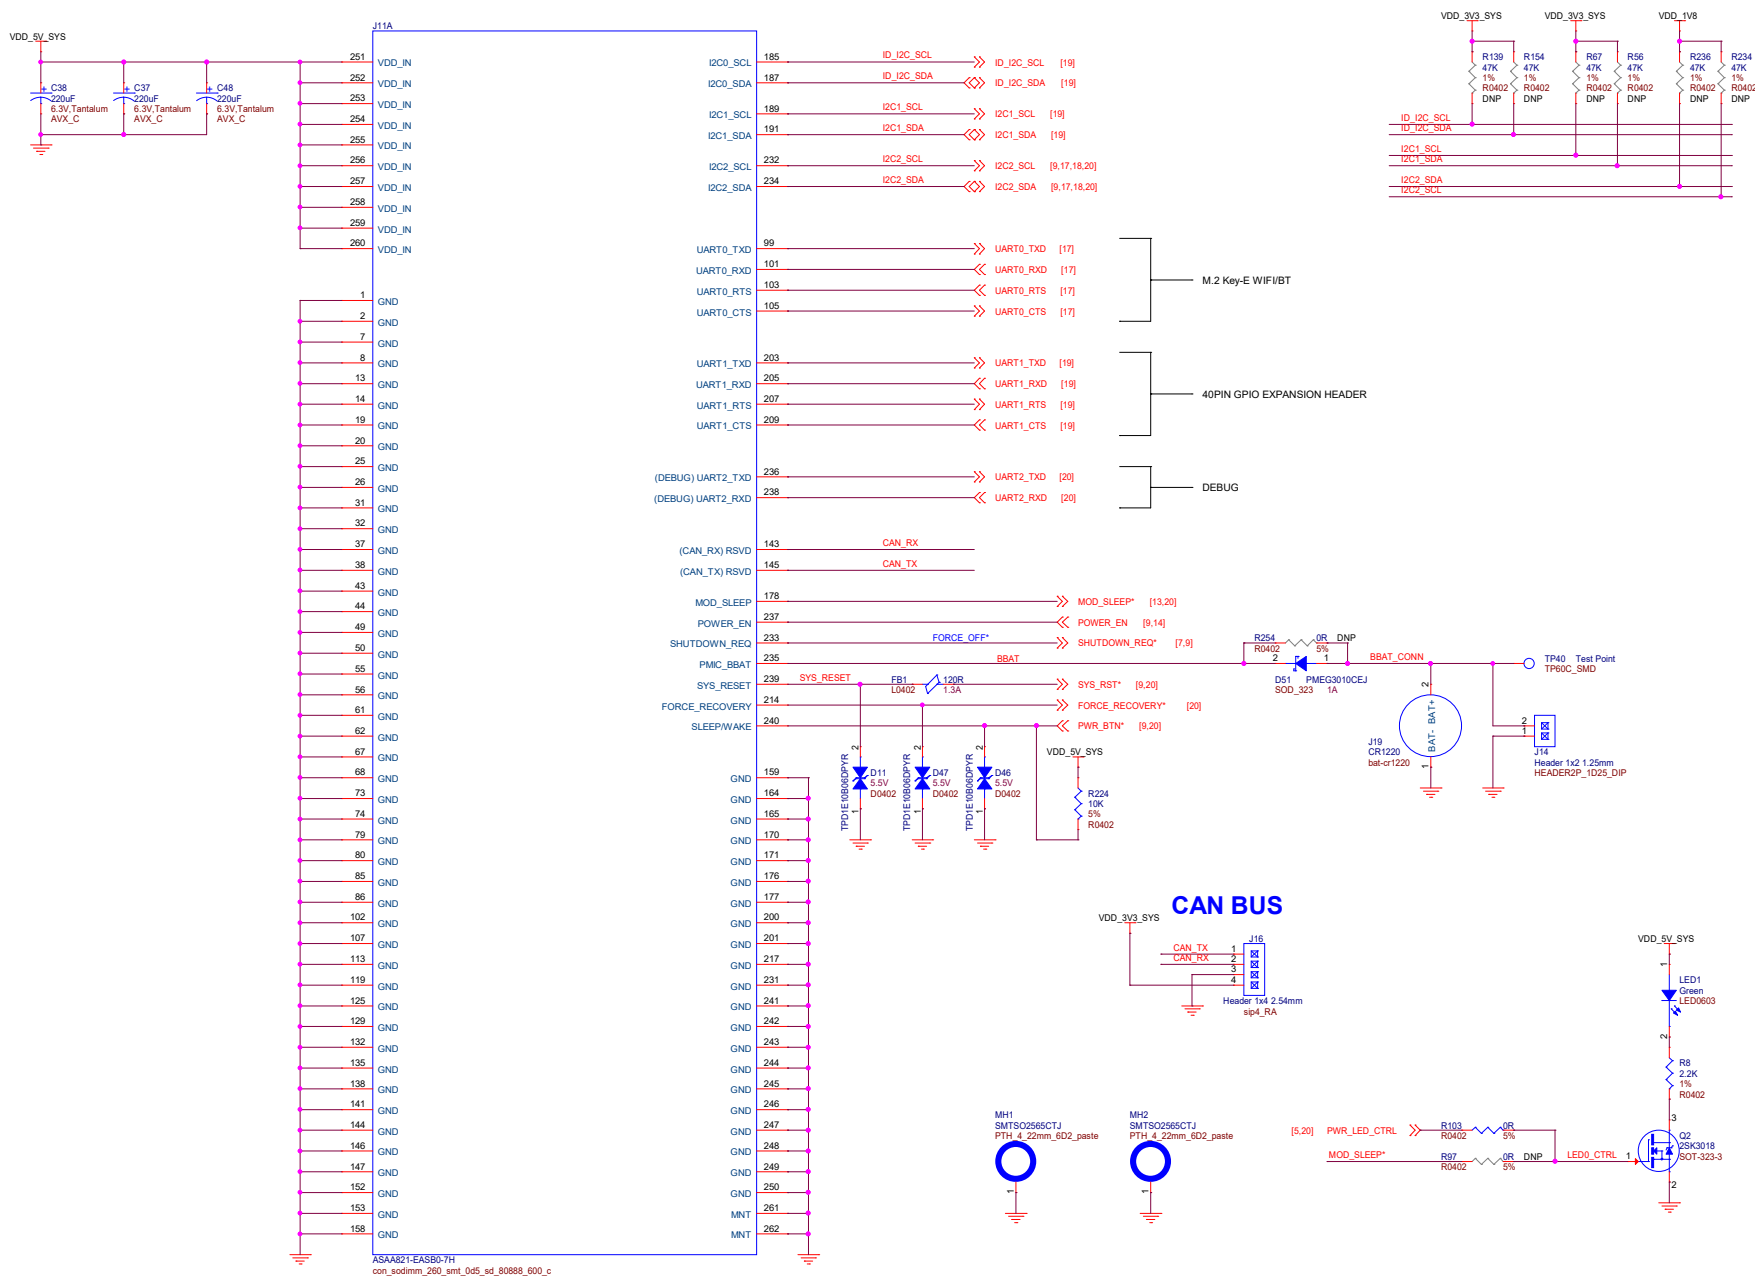


GPIOs, USB2.0, I2S, SPI, GBE and CSI

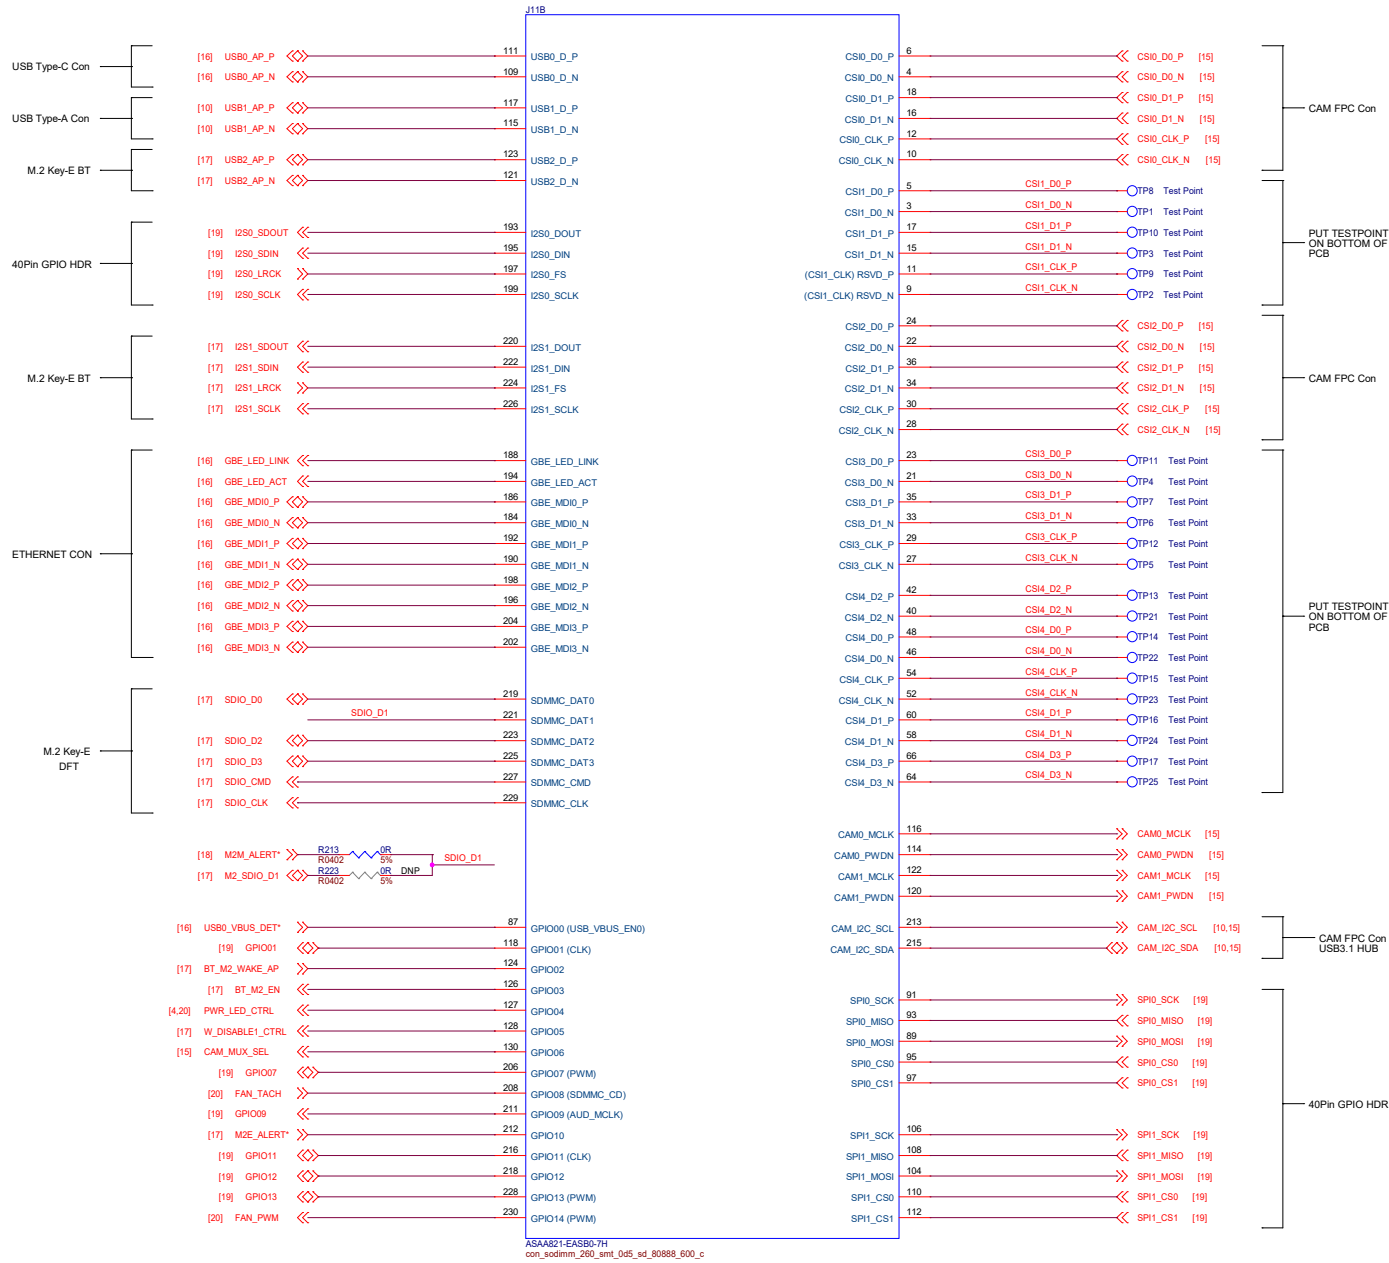





HDMI, DP, DSI, USBSS and PCIe

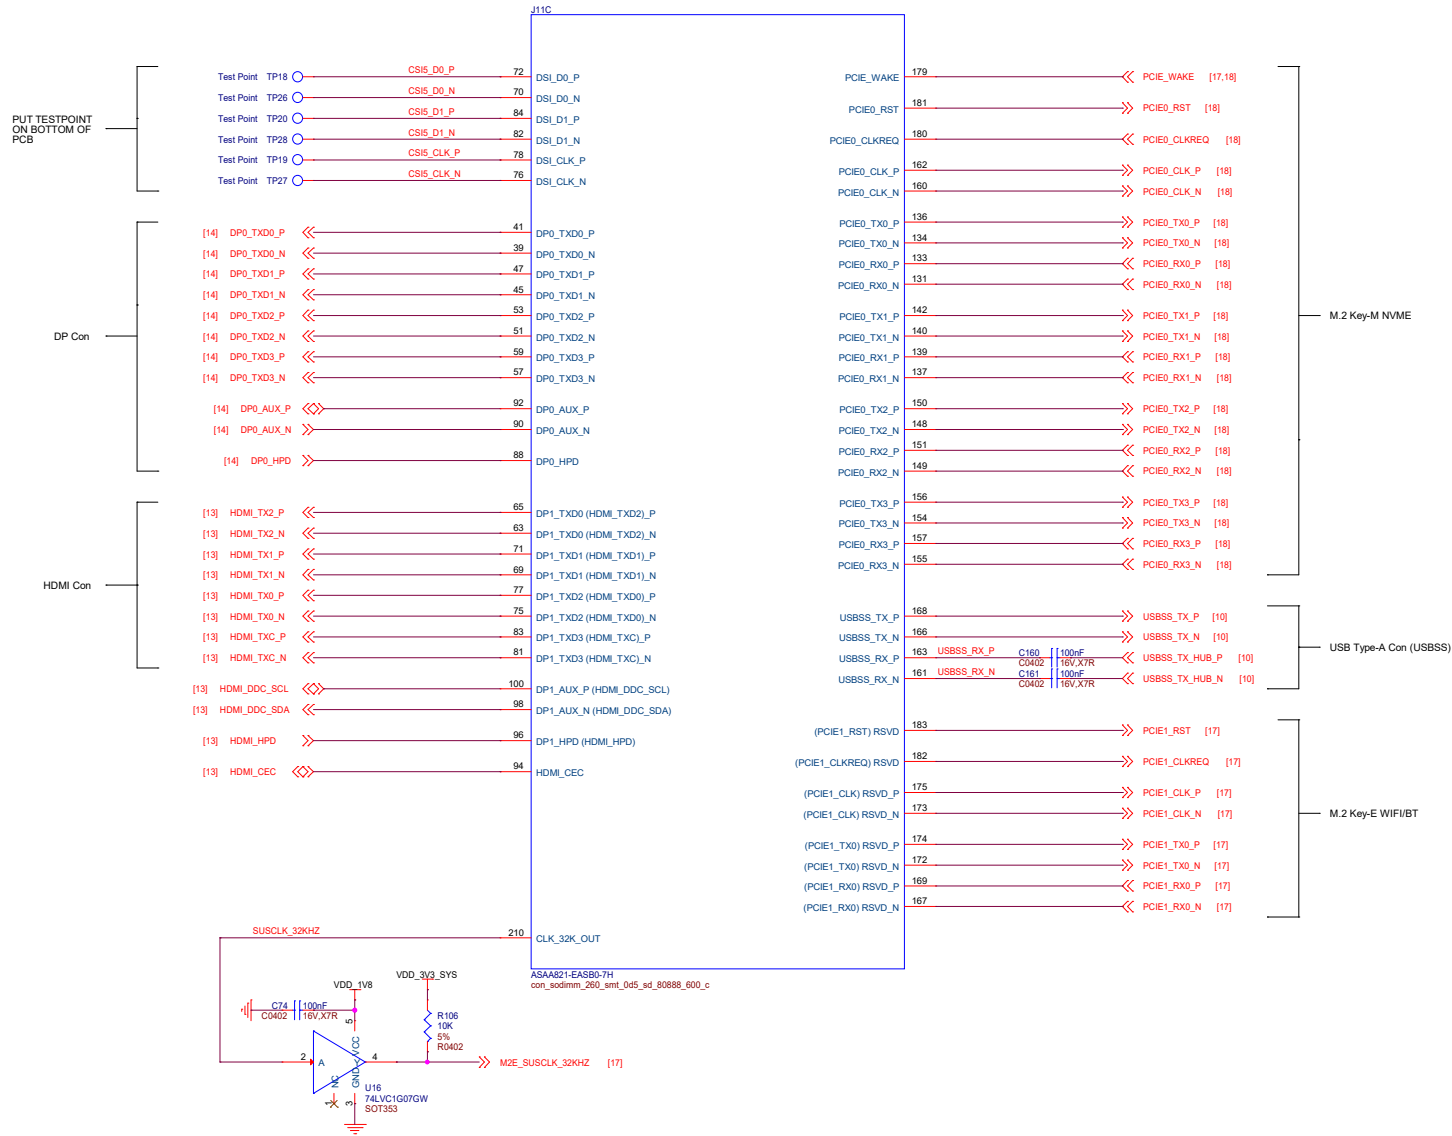

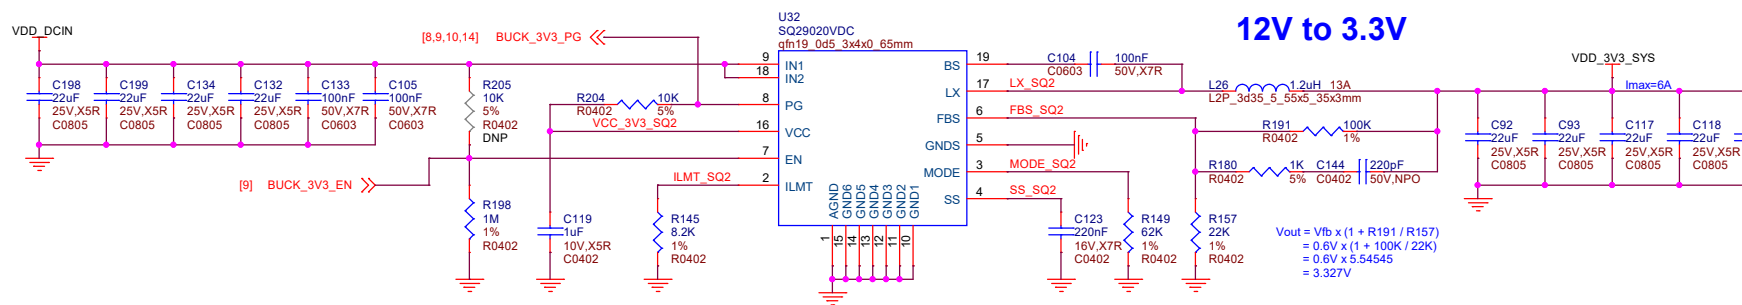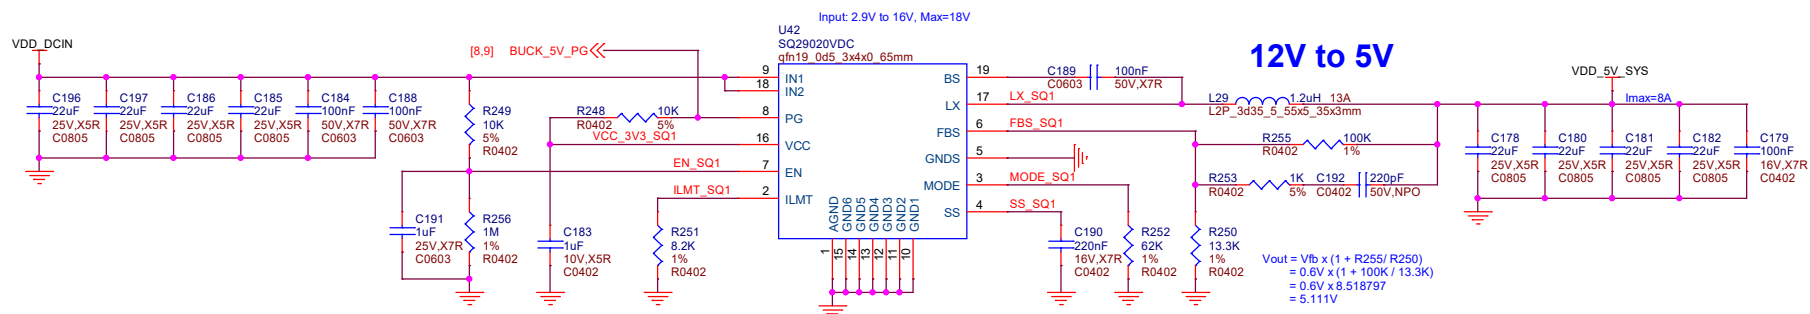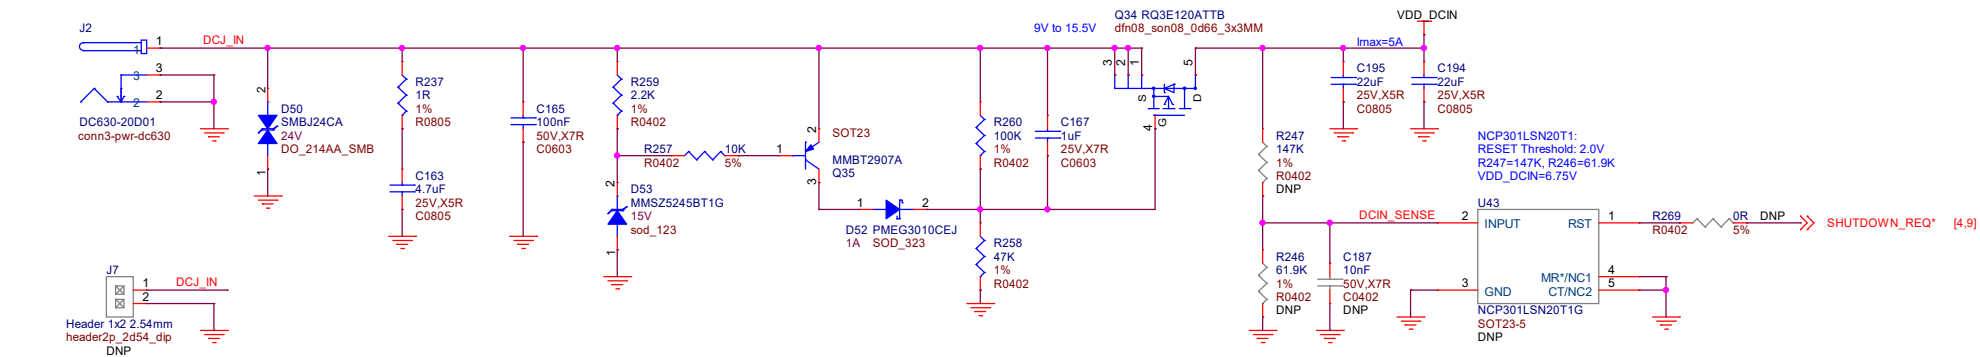


VDD_3V3_SYS RAIL DISCHARGE

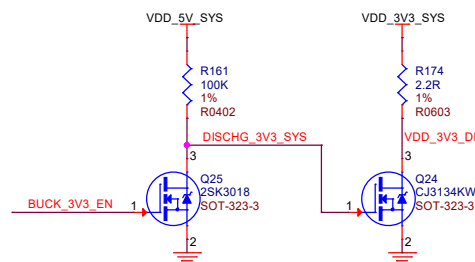

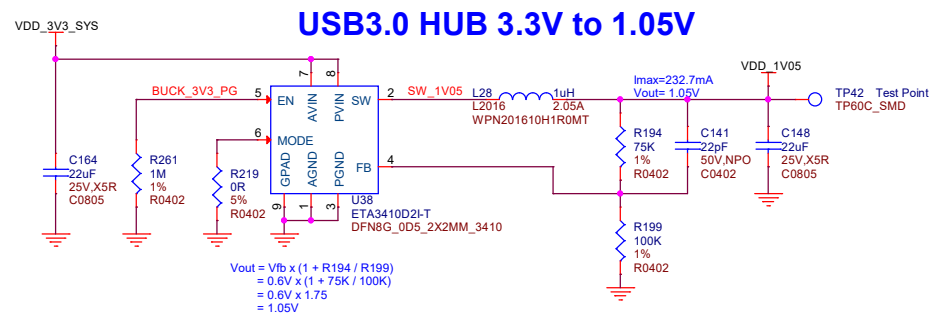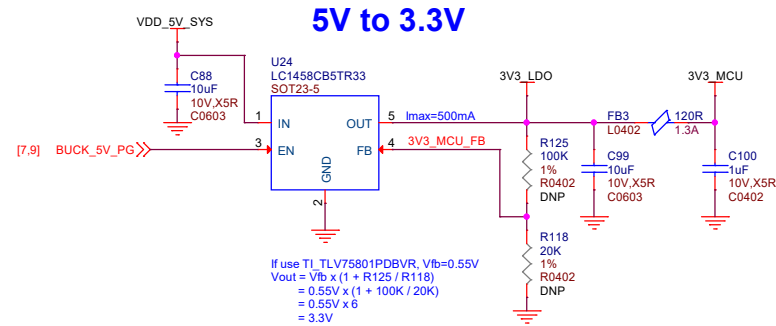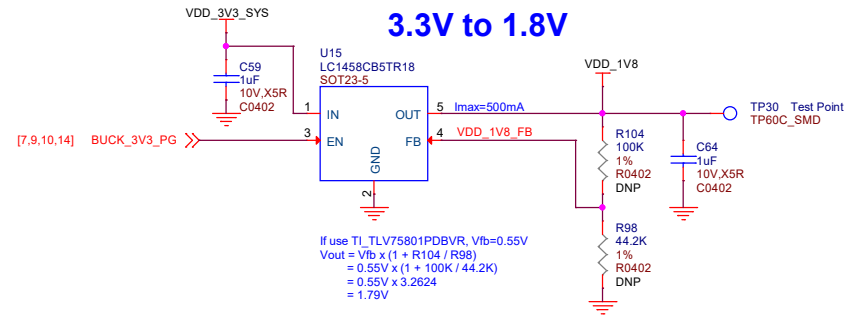


Button MCU For Power Up


MCU

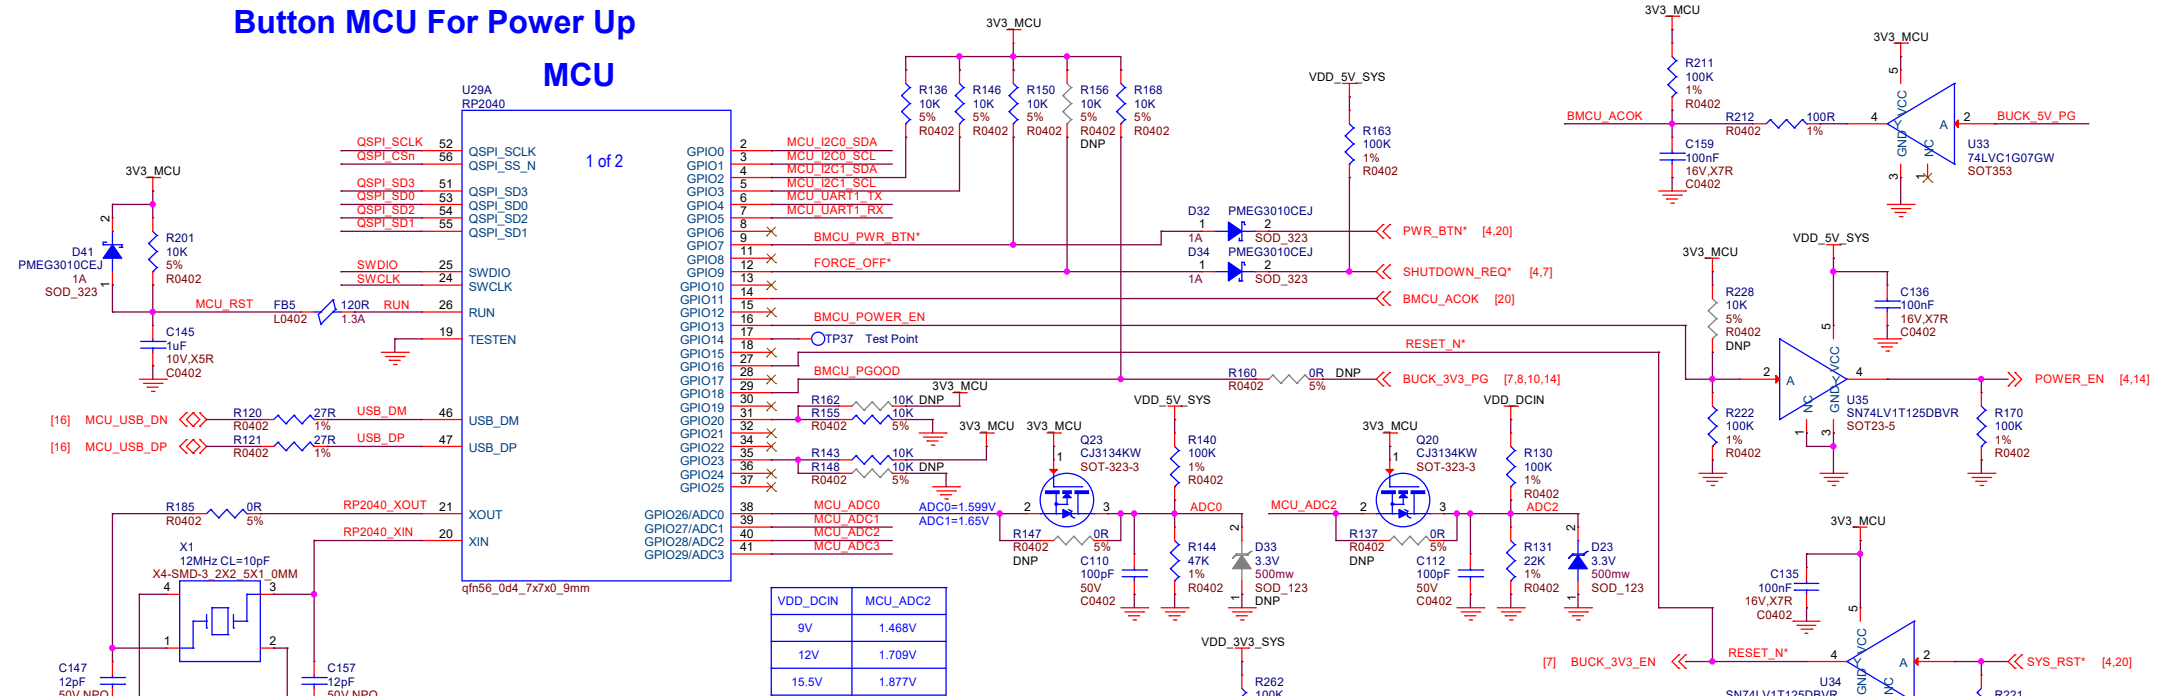


QSPI Flash

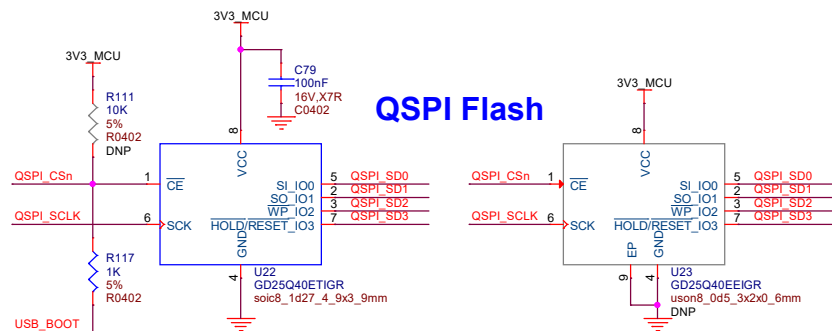


USB BOOT

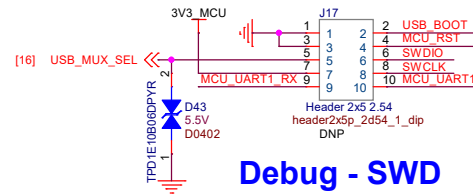


Debug - SWD

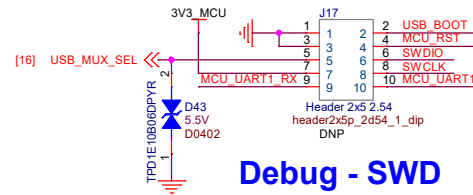


USB3.1 GEN2 HUB x4 PORTS

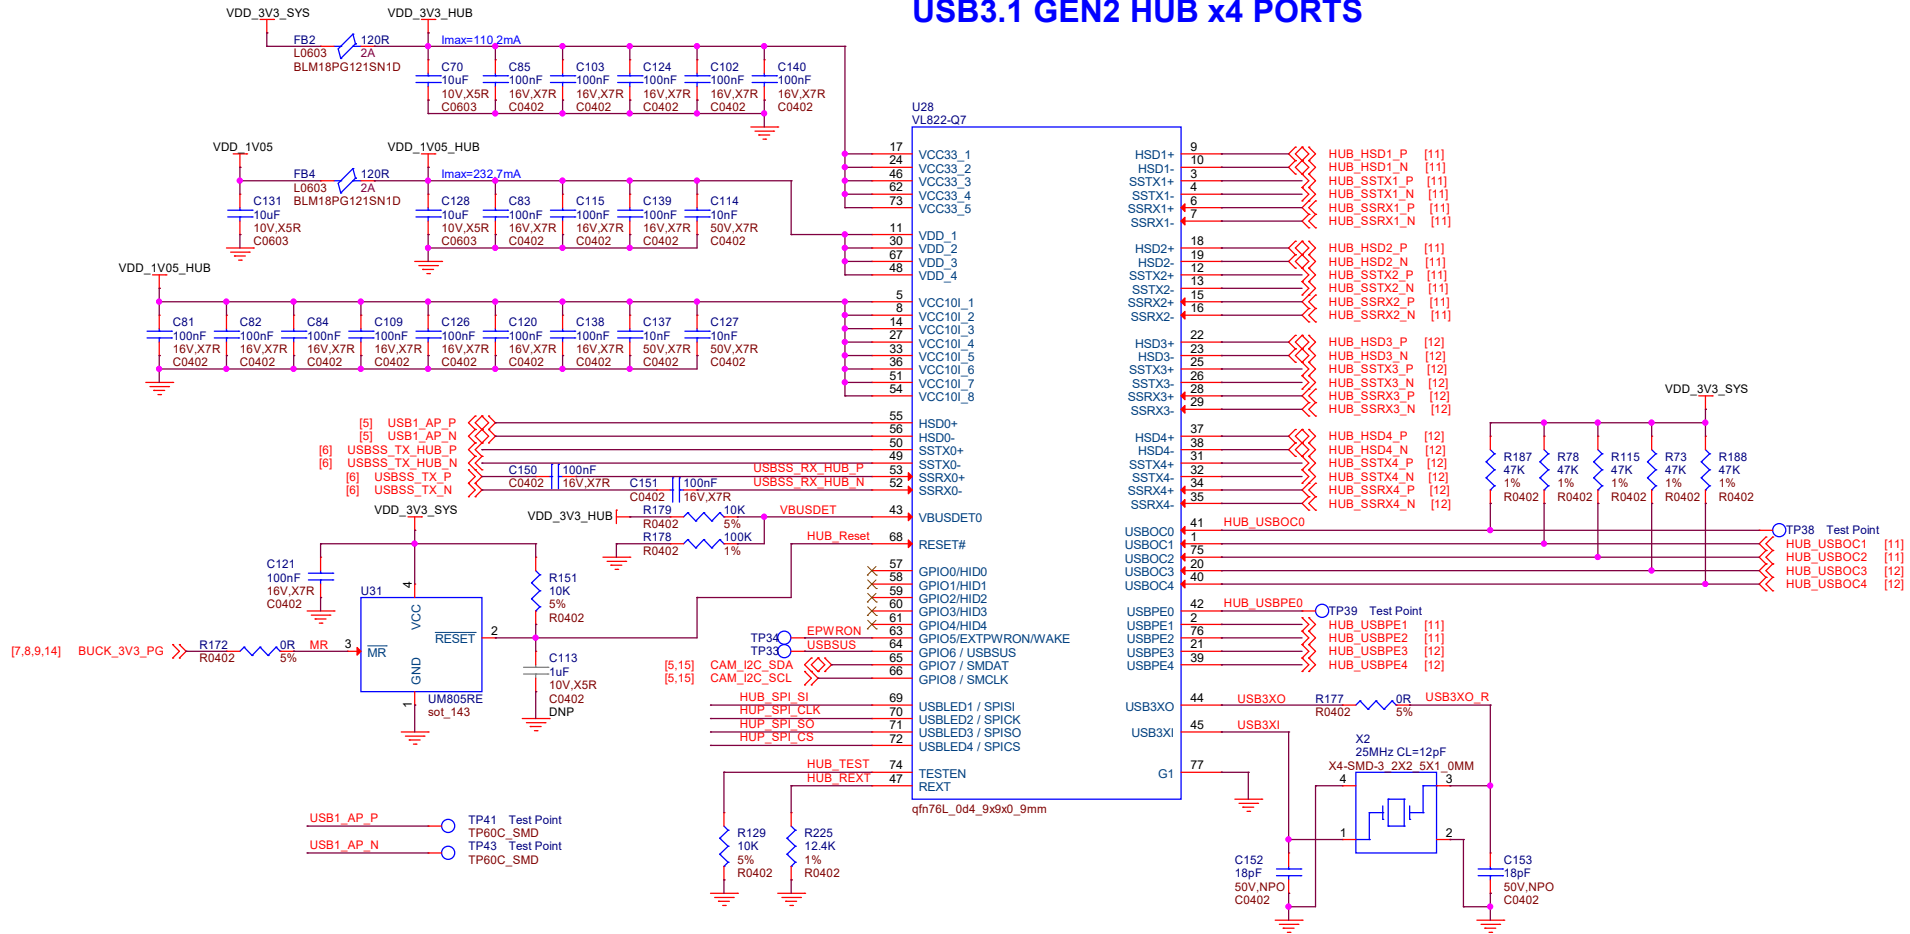


QSPI Flash

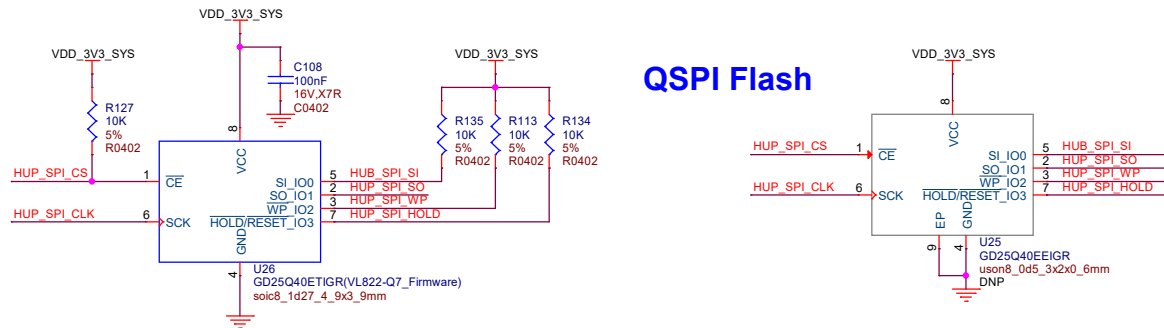


USB3.1 TYPE-A x2 (A)

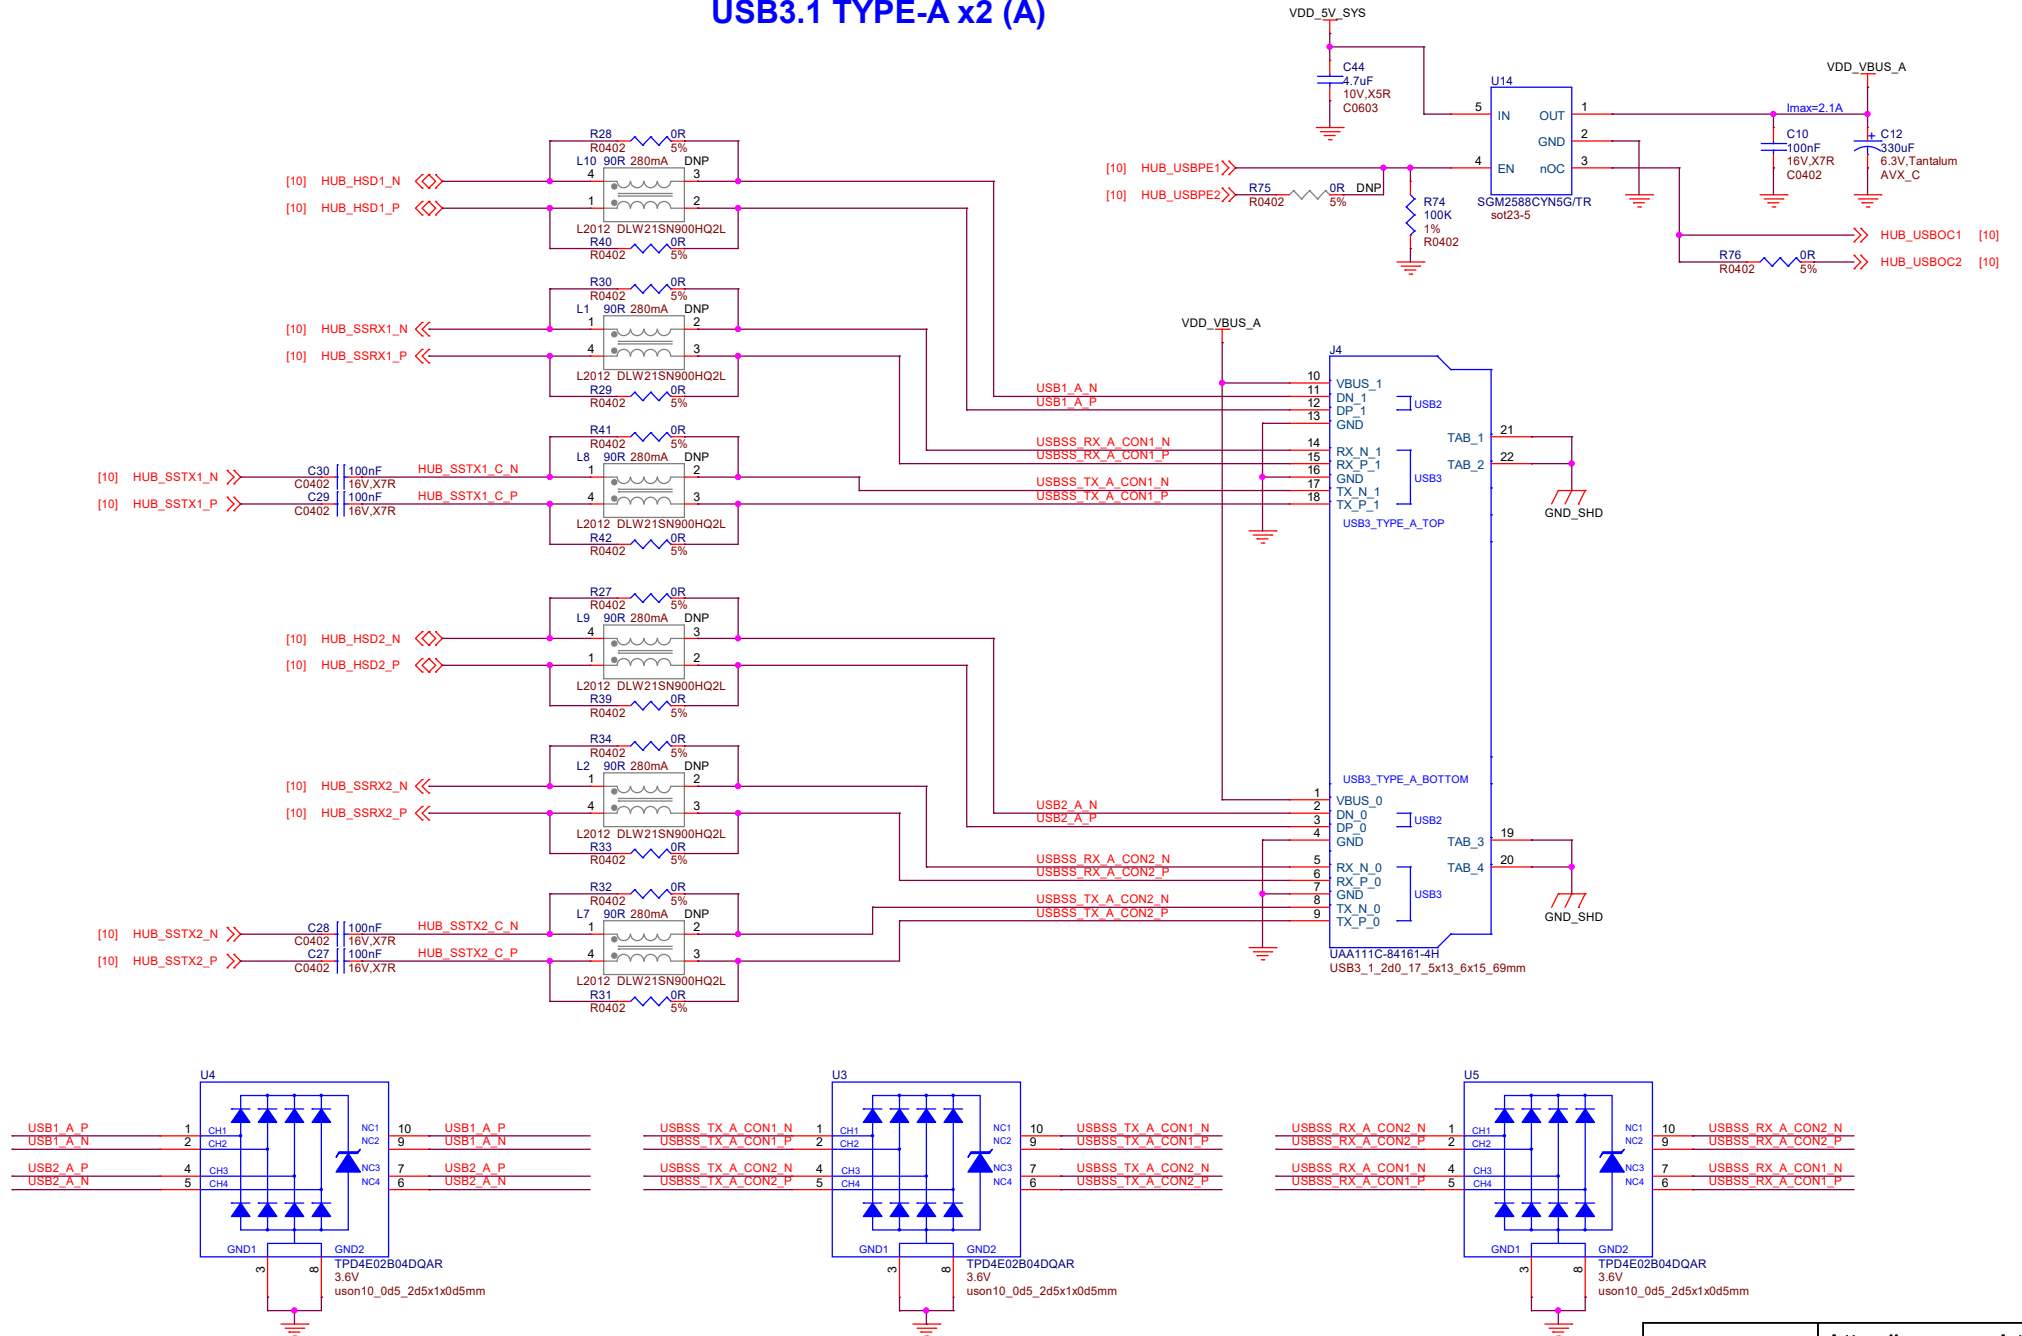


USB3.1 TYPE-A x2 (B)

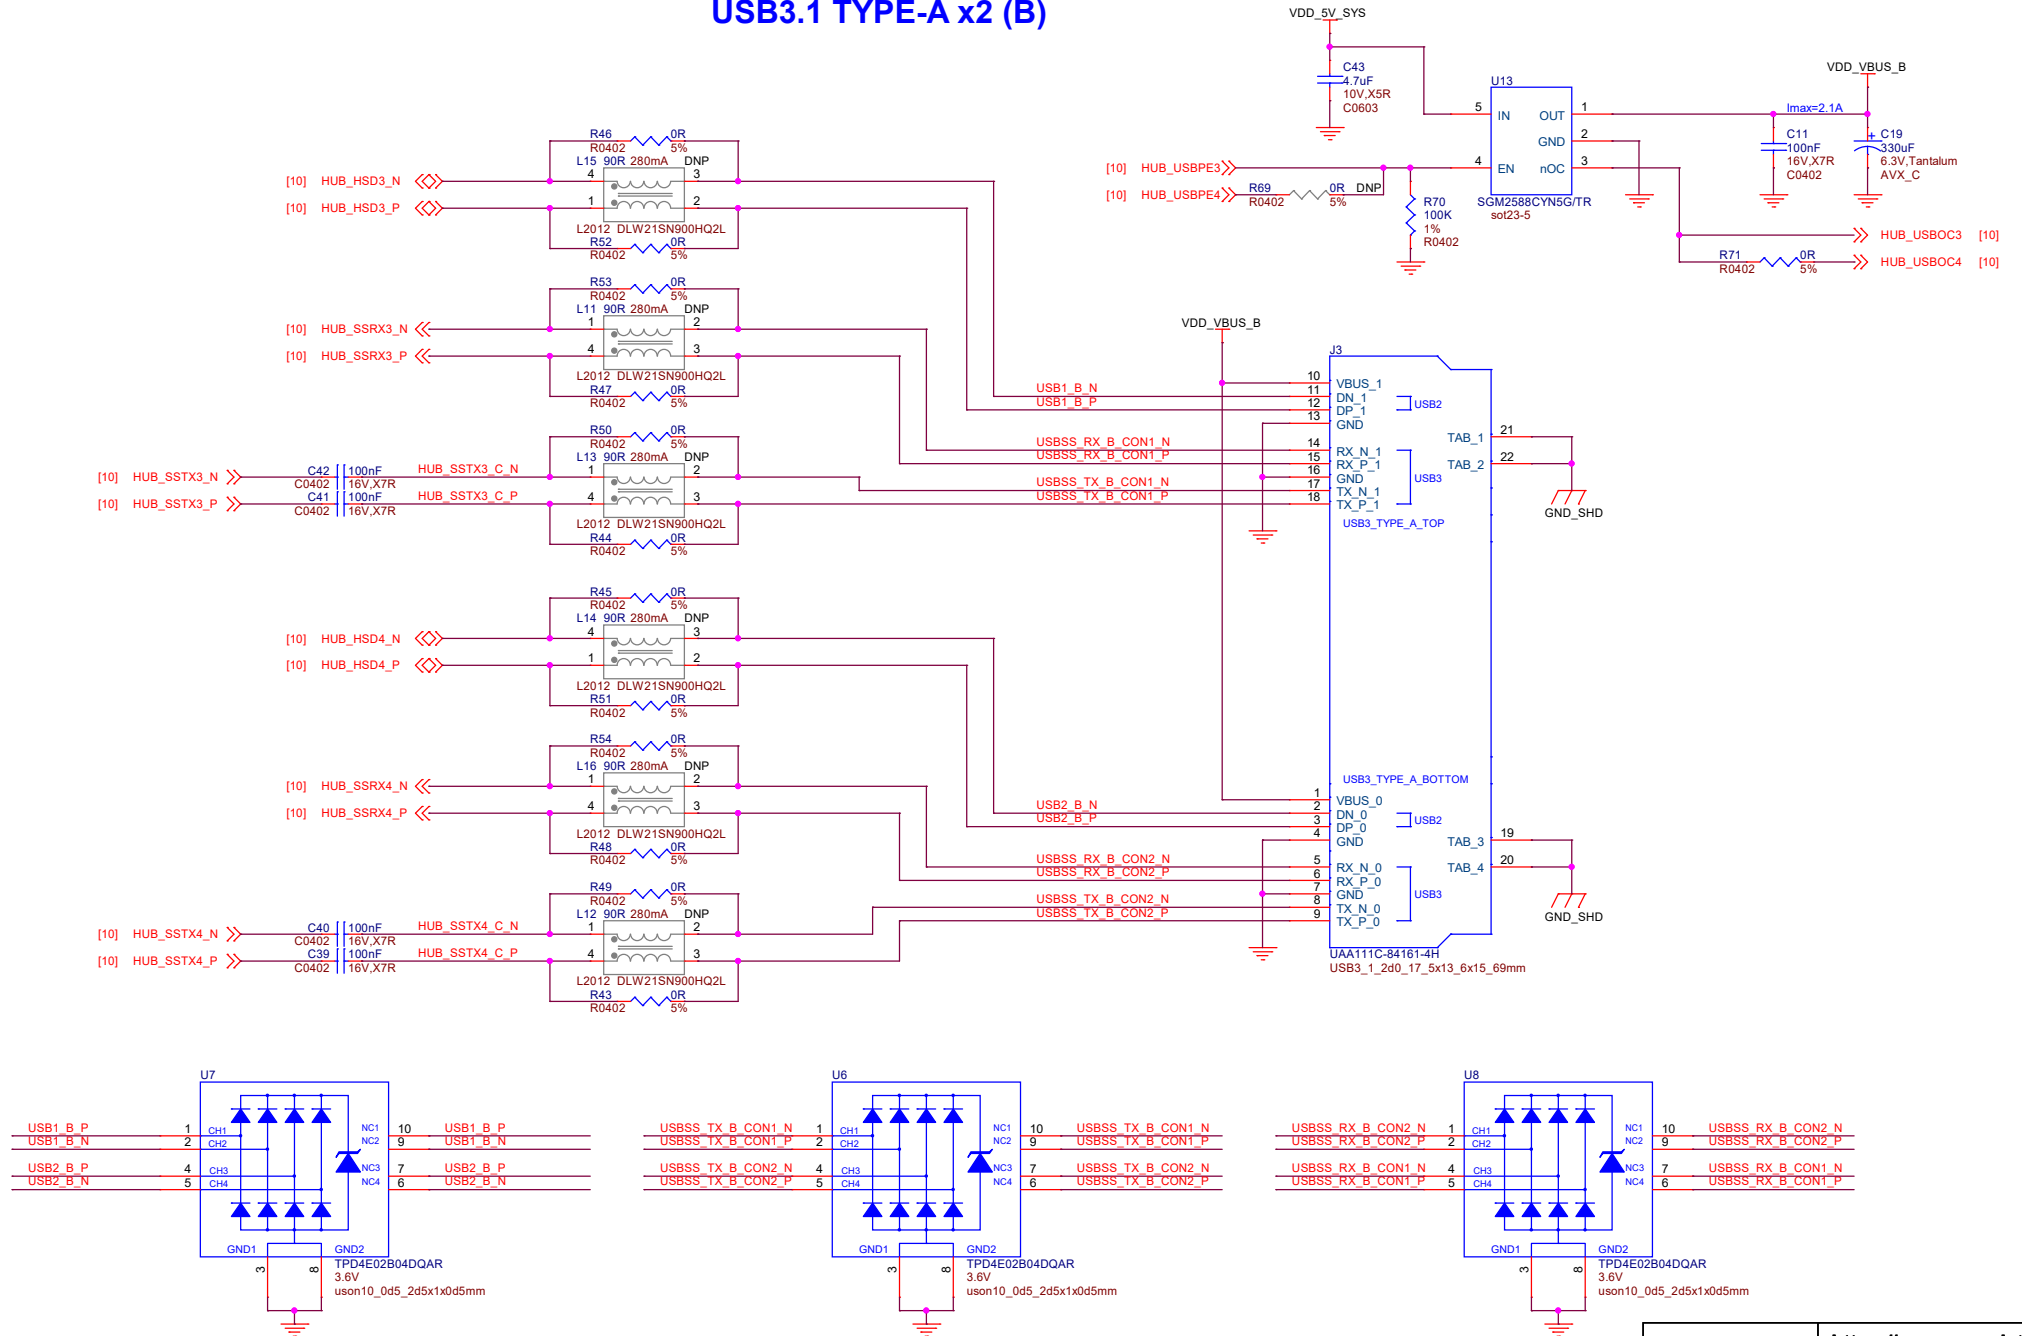




HDMI Connector



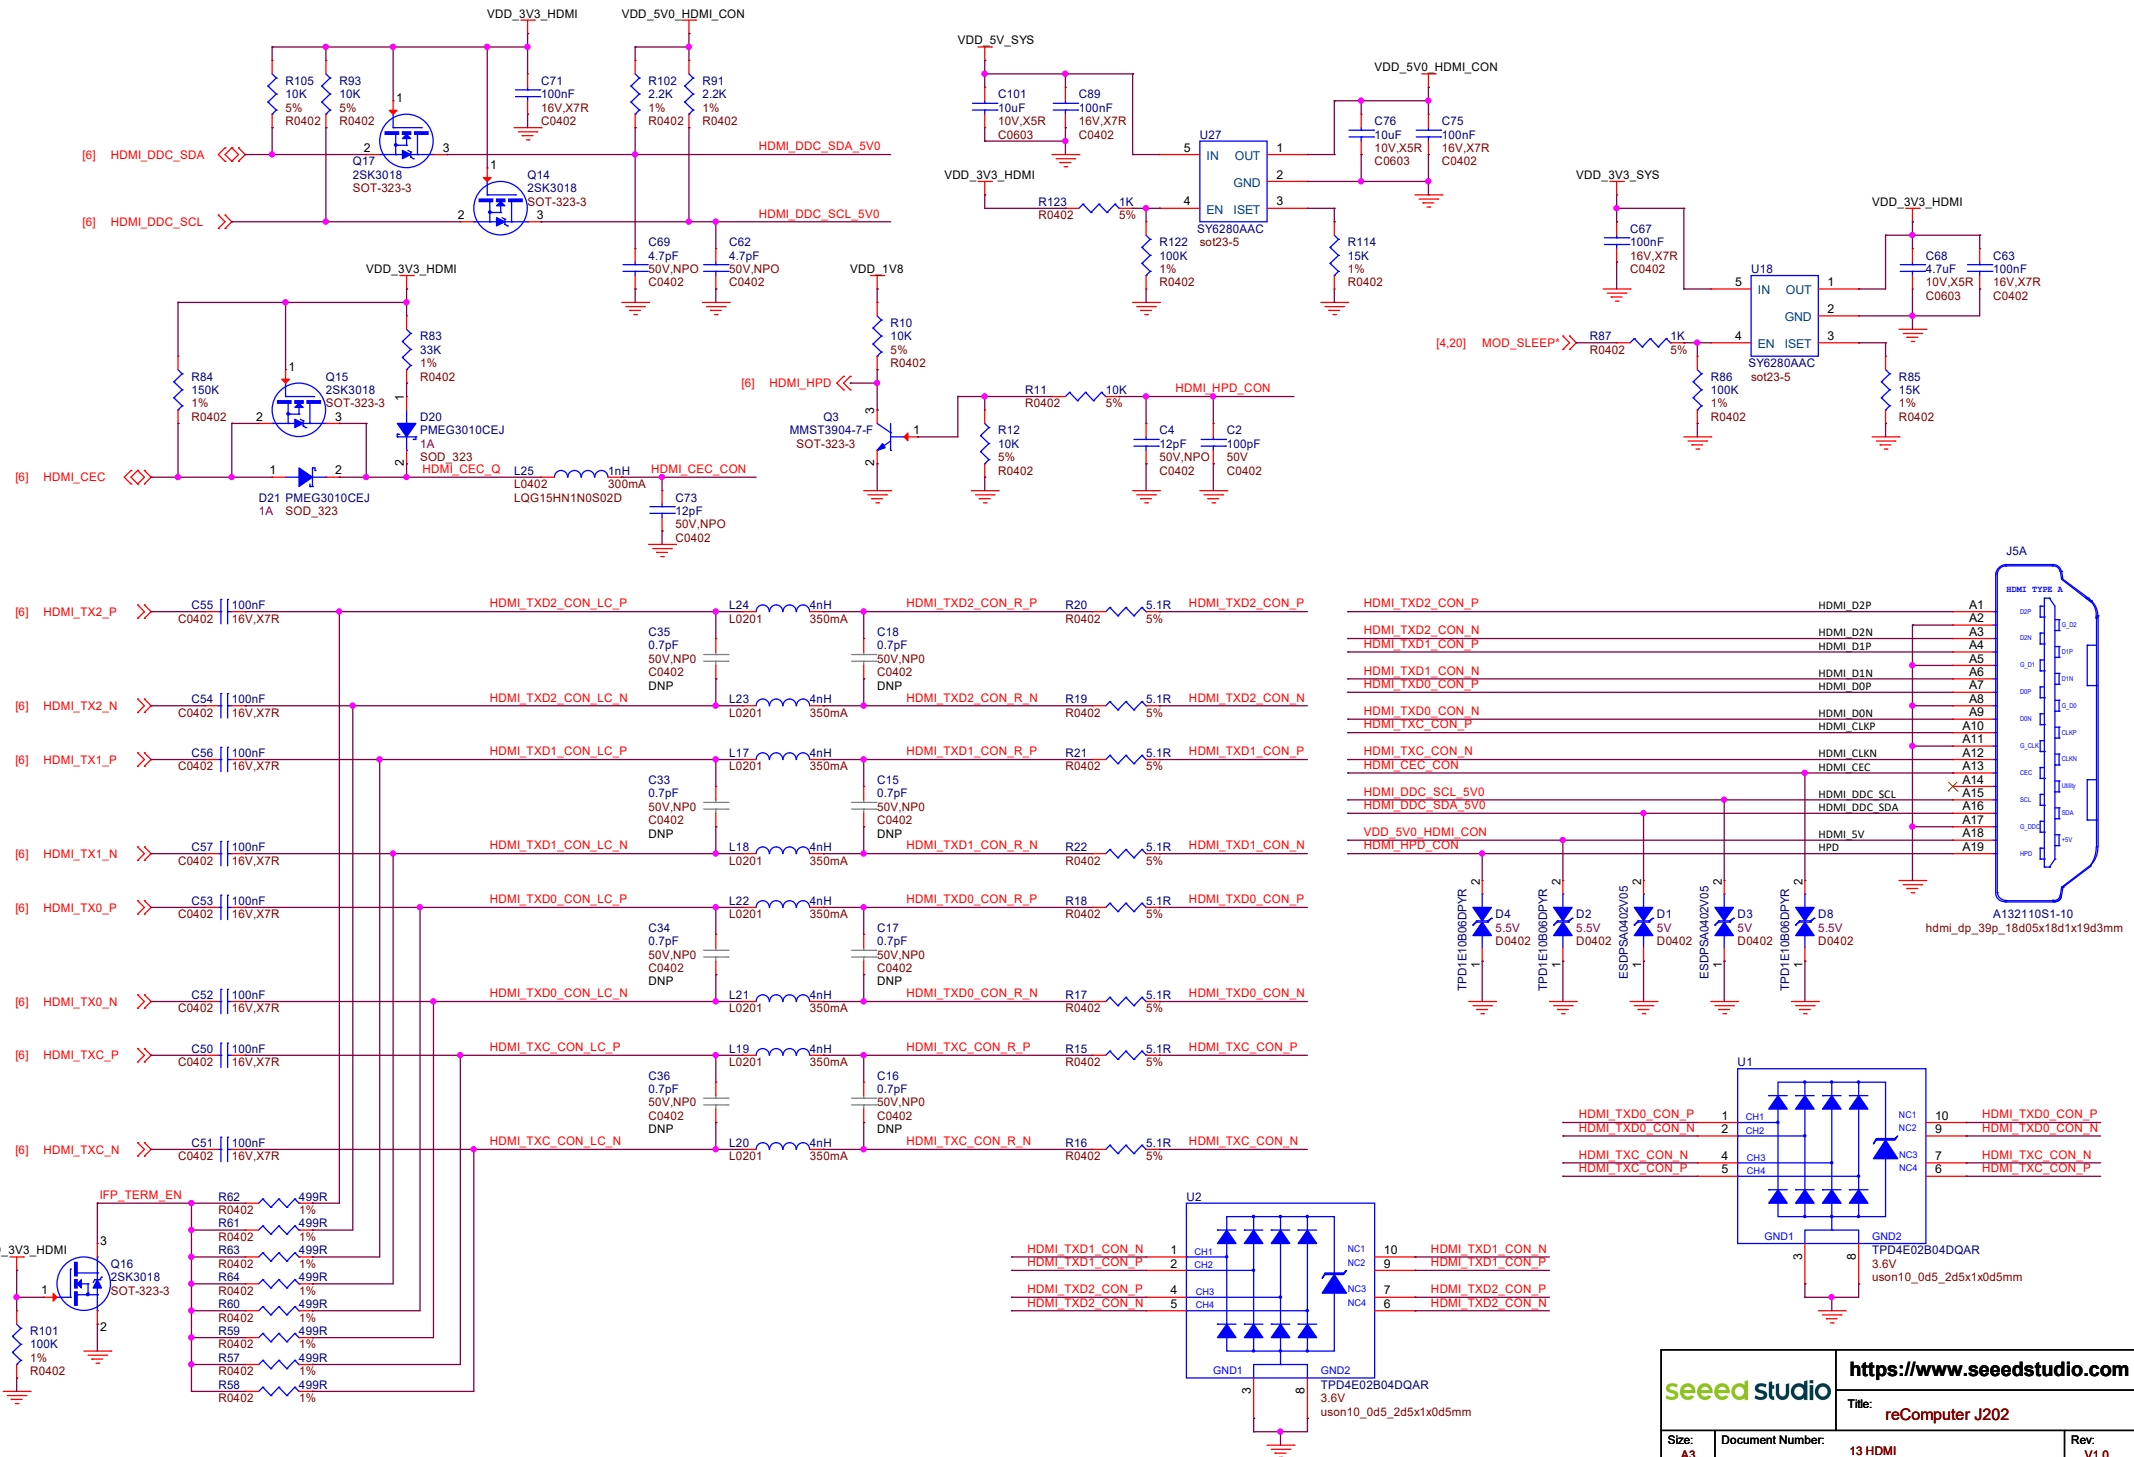


DisplayPort Connector


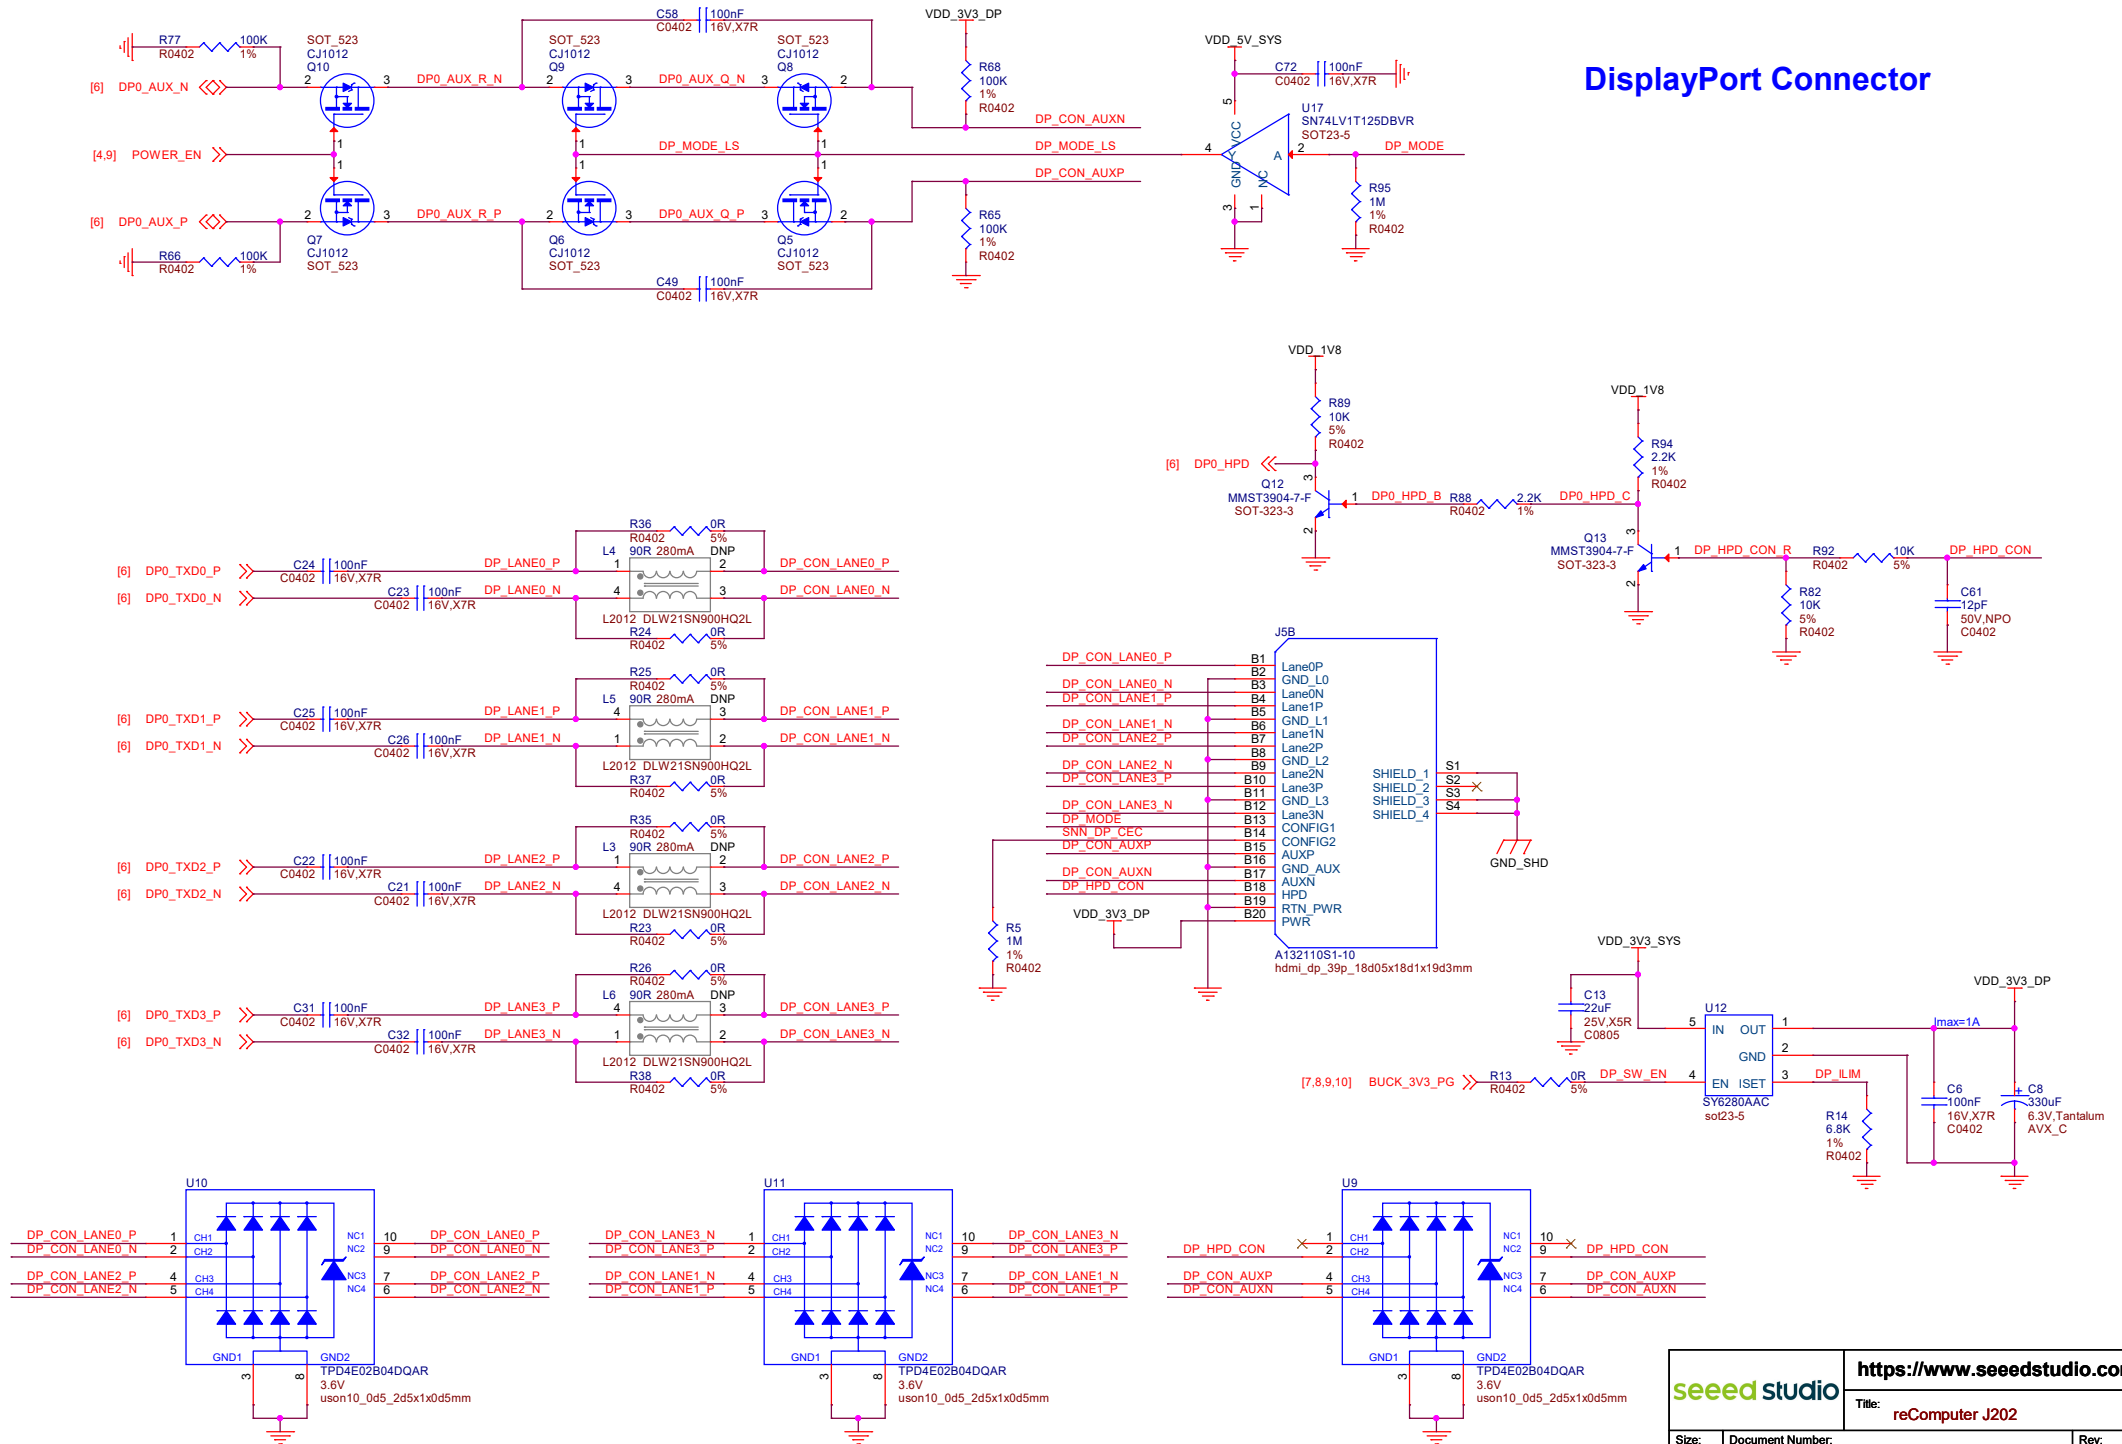


CSI CAM CONNECTOR

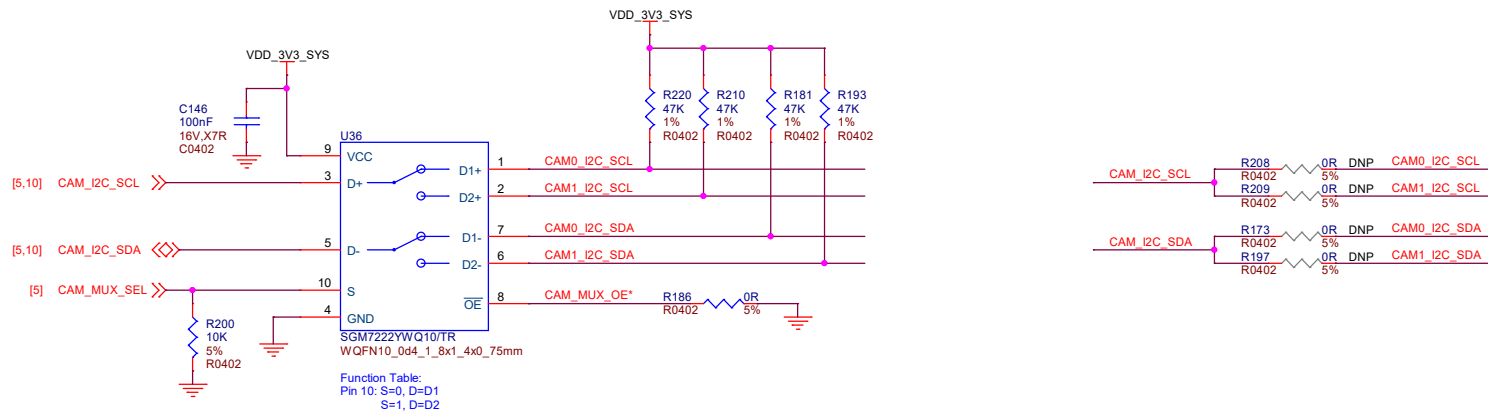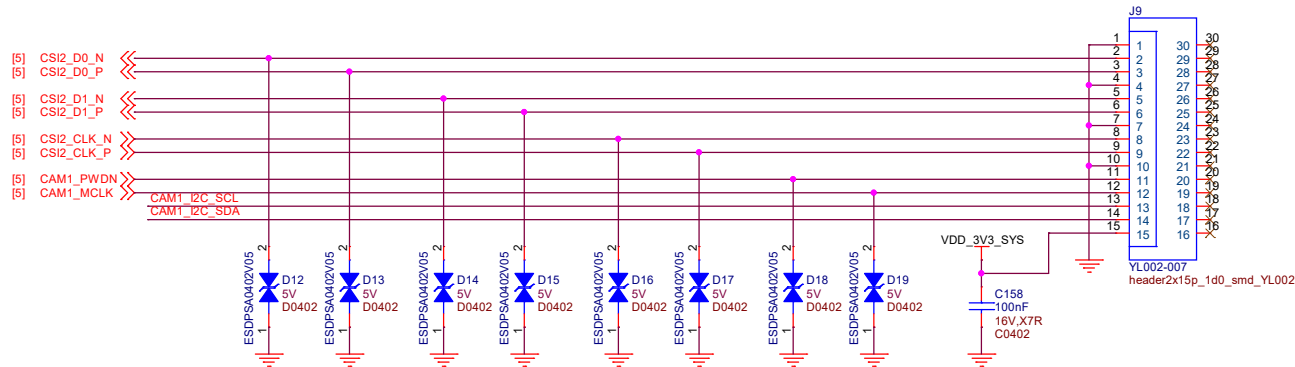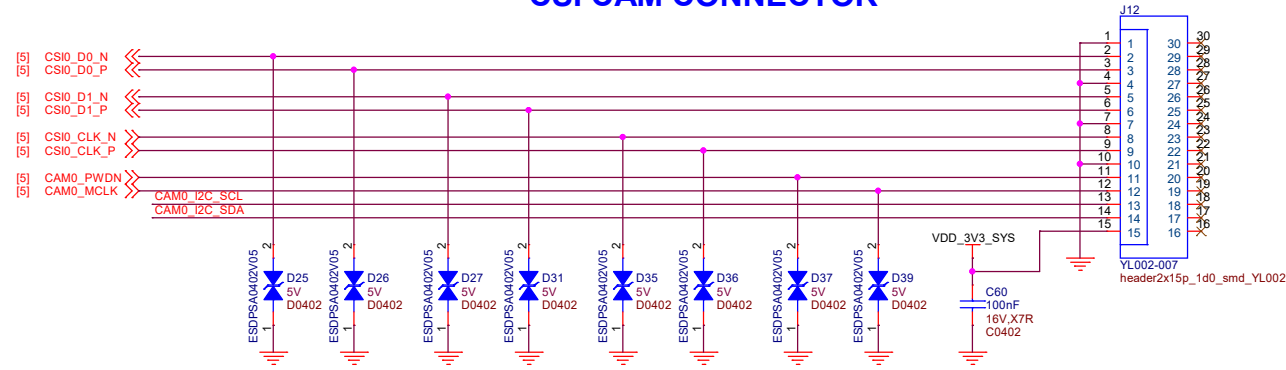


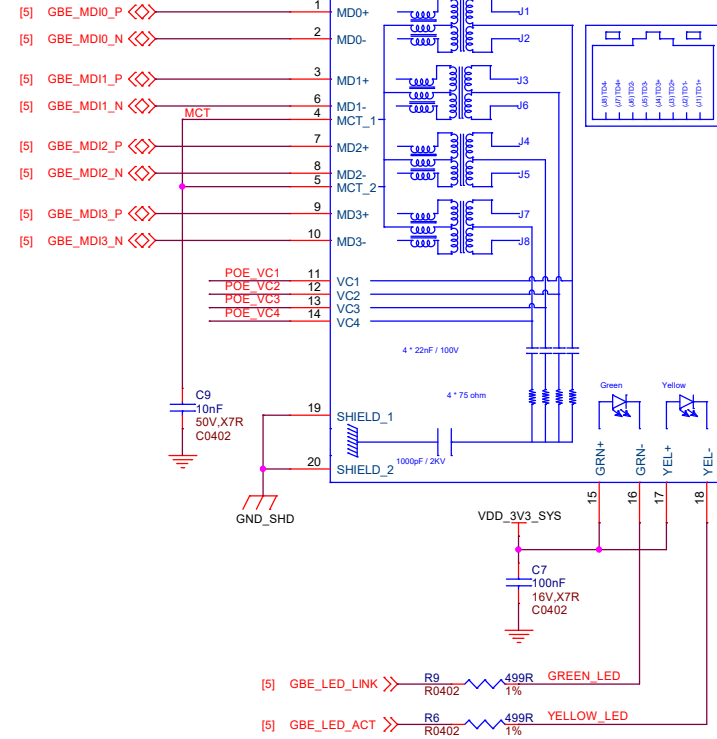


J1
USB2.0 Type C
USB2_0_TYPE_C_long

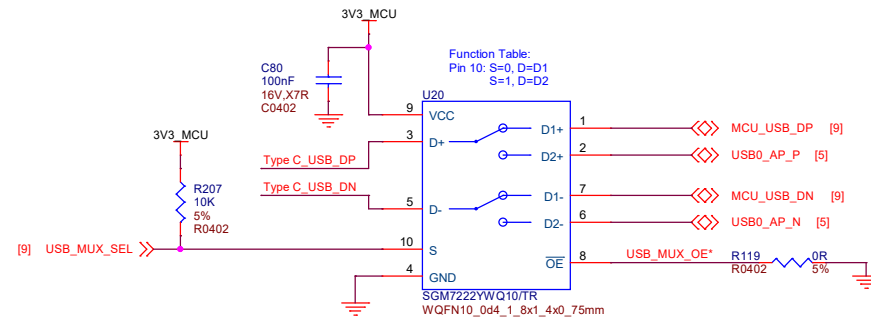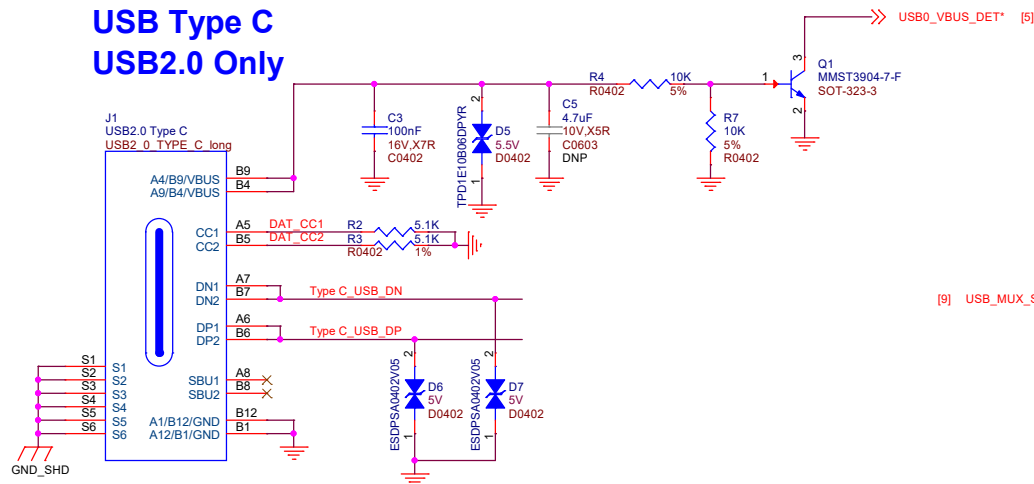







M.2 KEY-E (WIFI/BT)

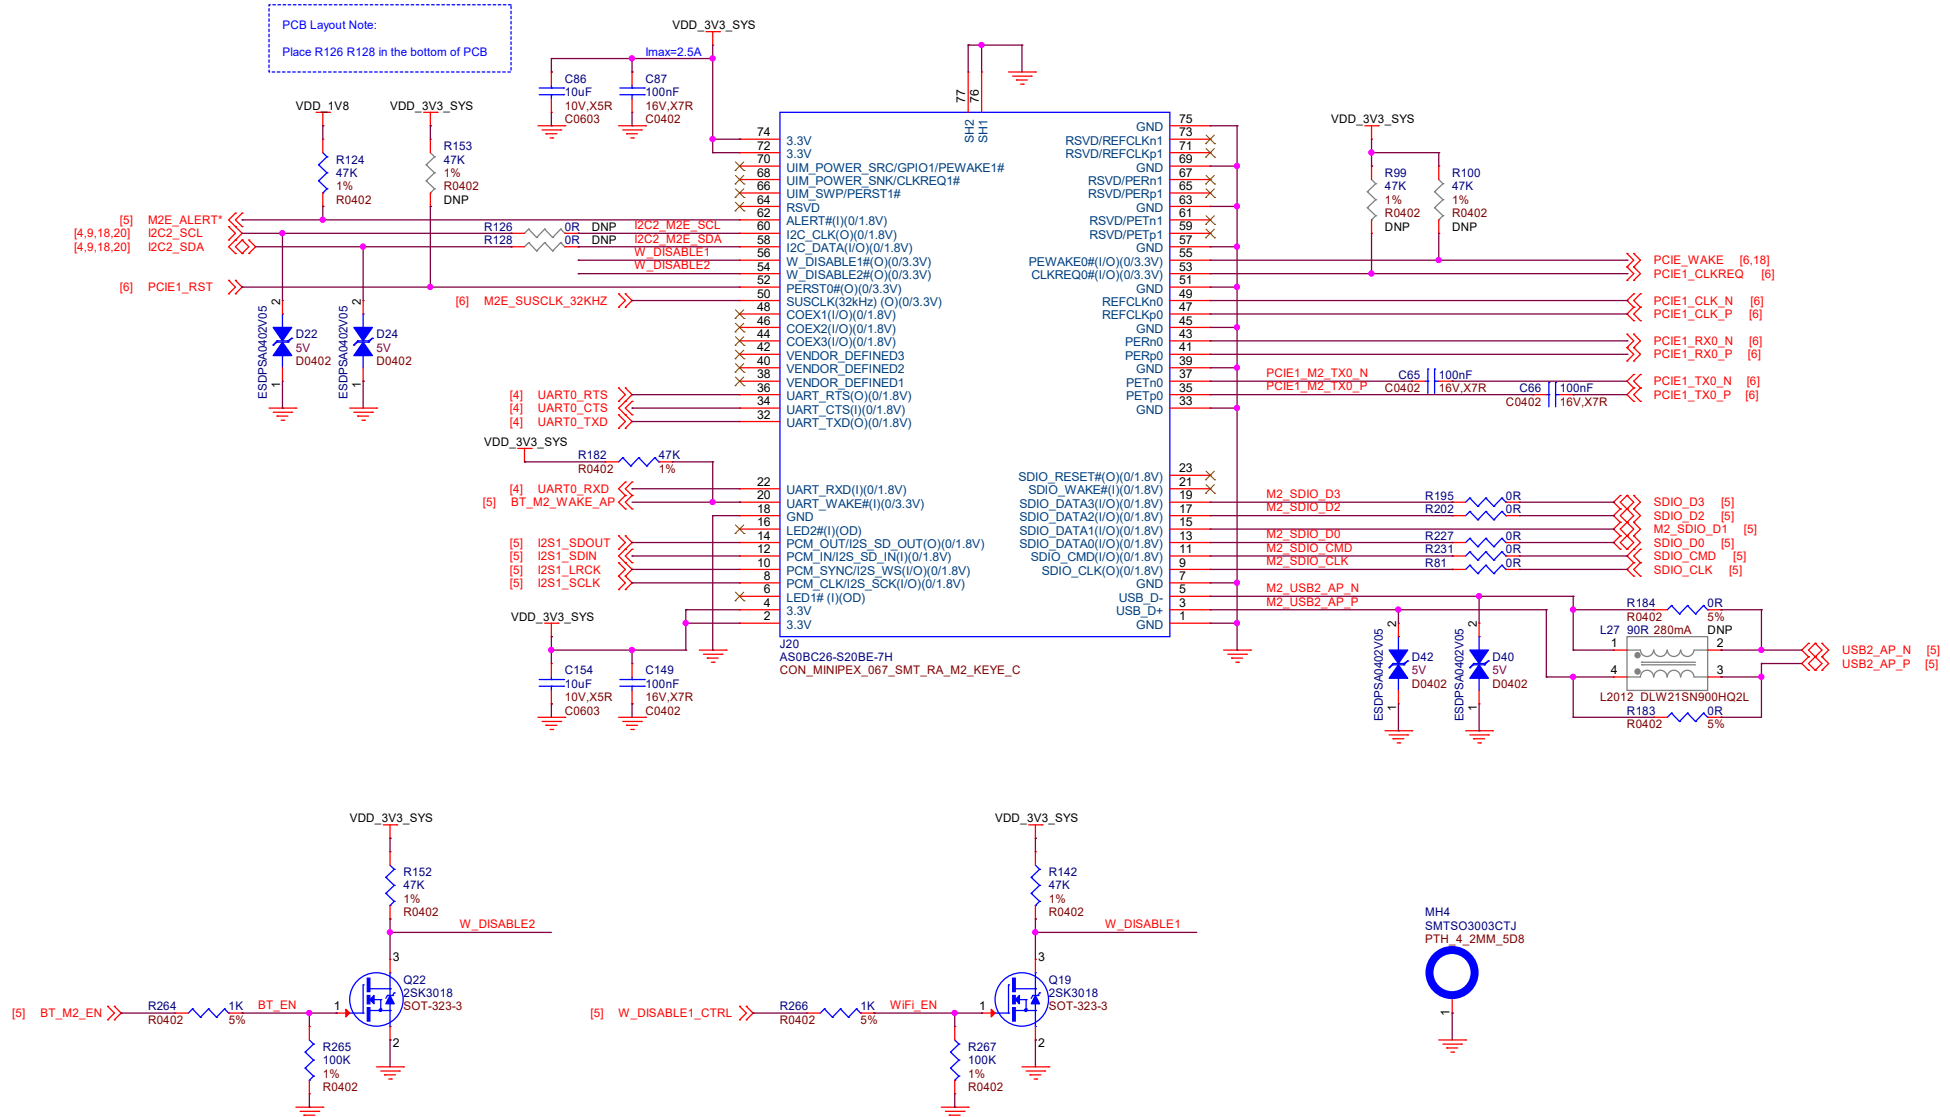


M.2 KEY-M (NVME)

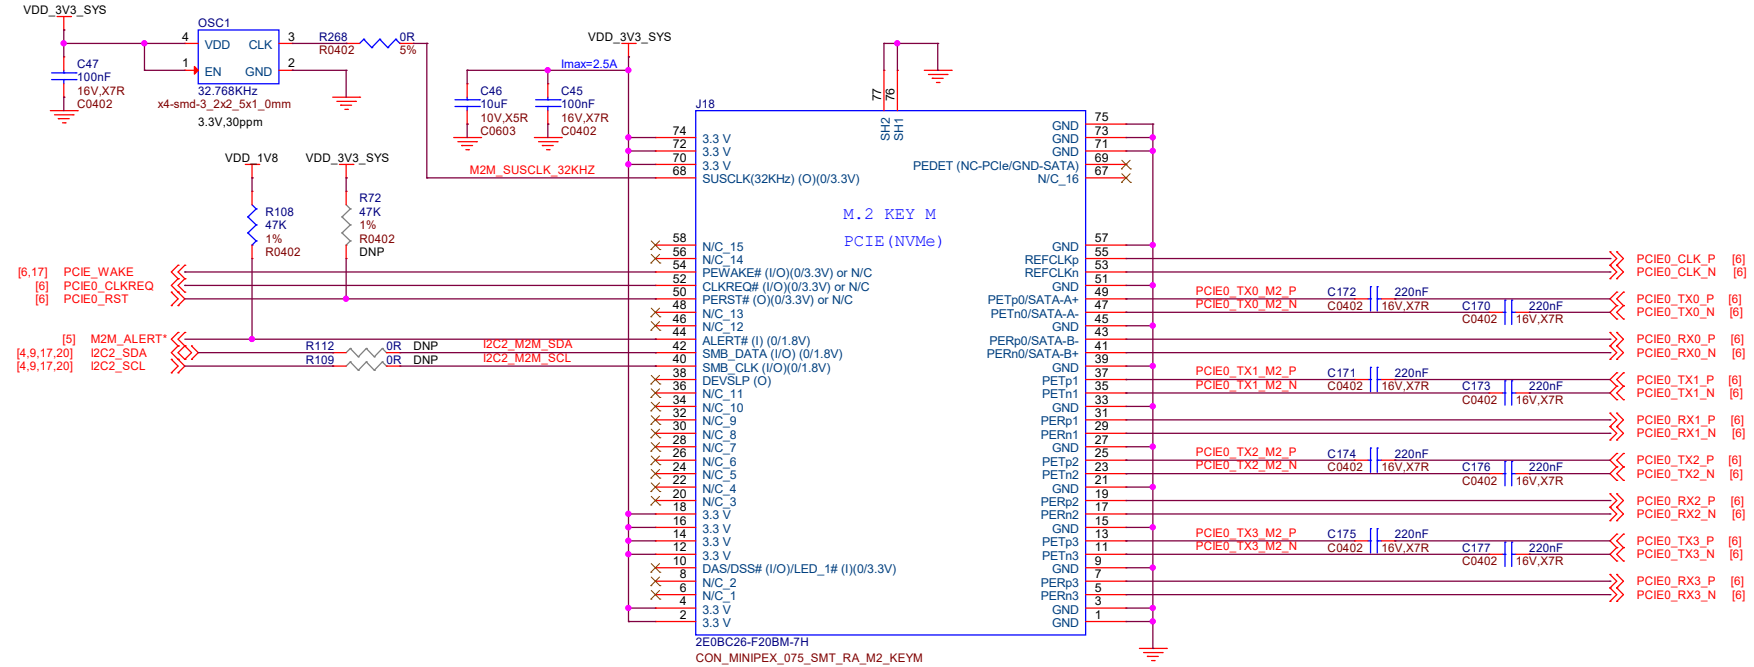


40PIN GPIO EXPANSION HEADER & LEVEL SHIFTERS

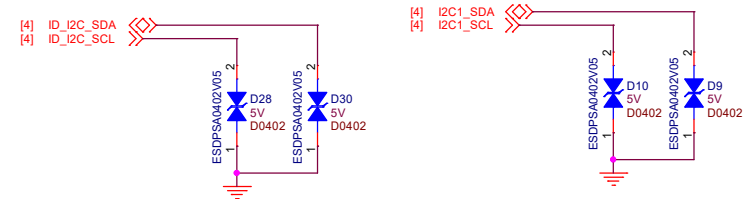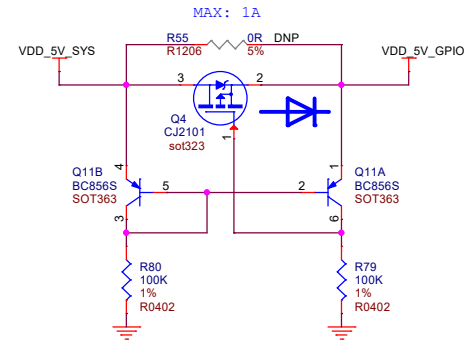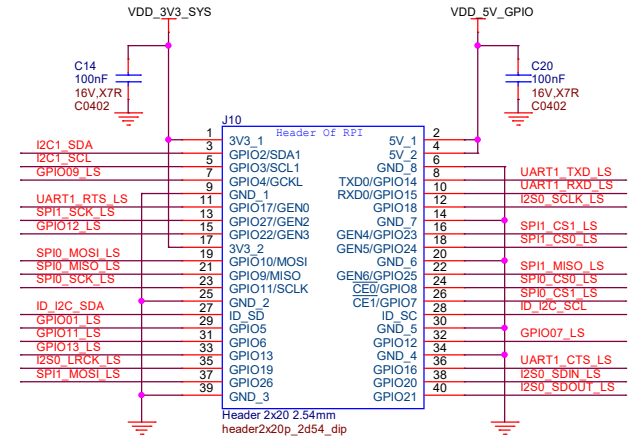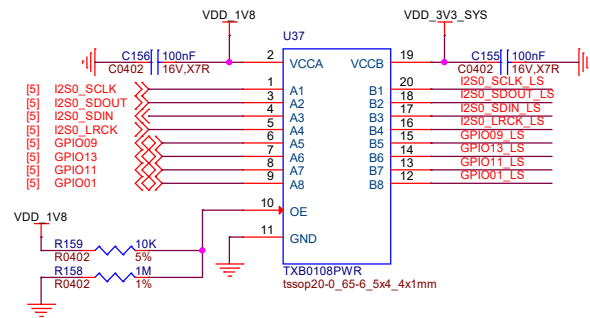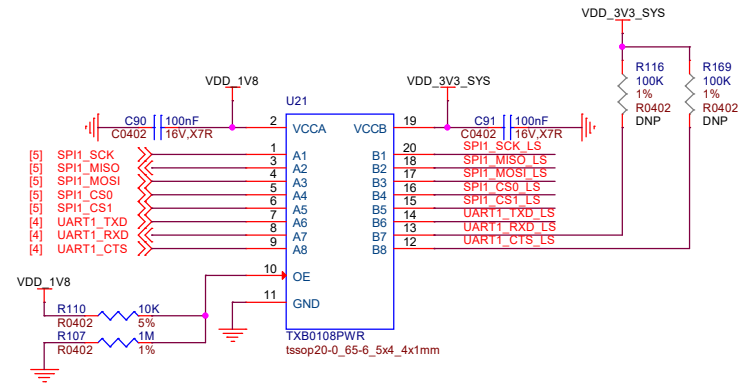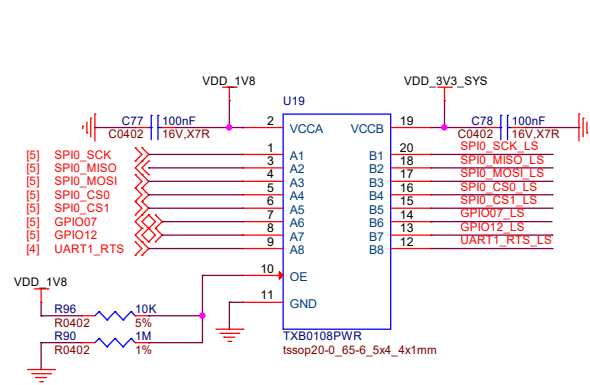


SoC Fan Header 4pin

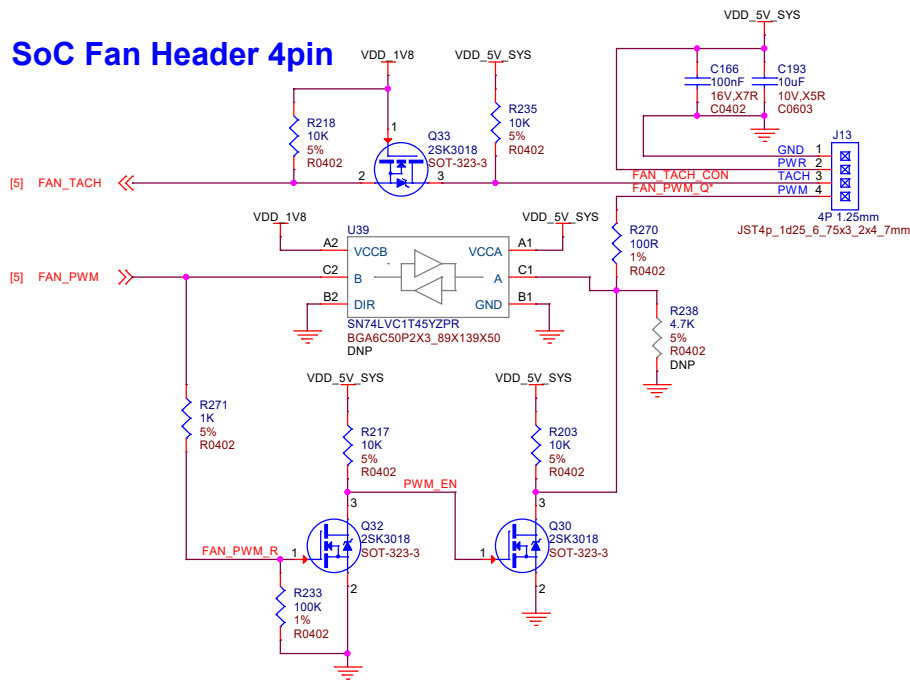


Carrier Board Config

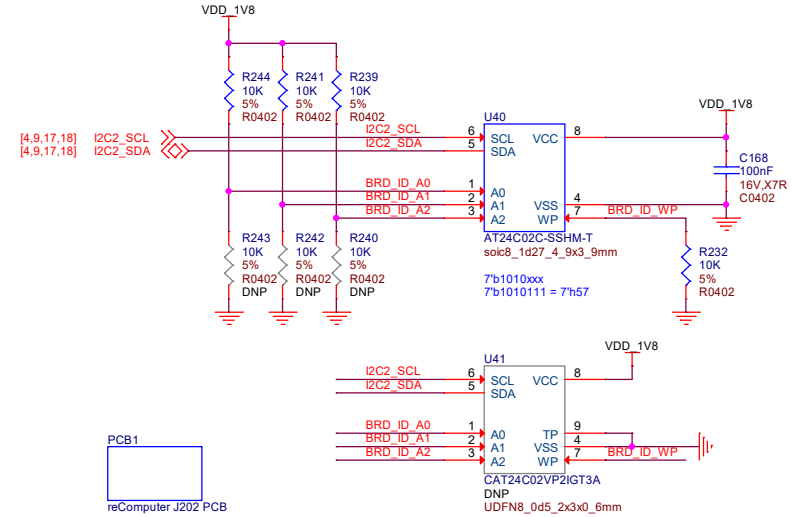

Serial Port

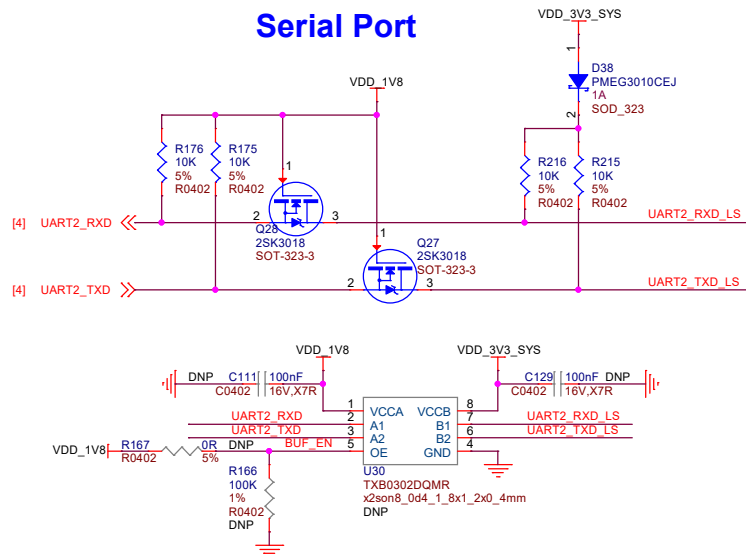

Optional Button Header Pinout

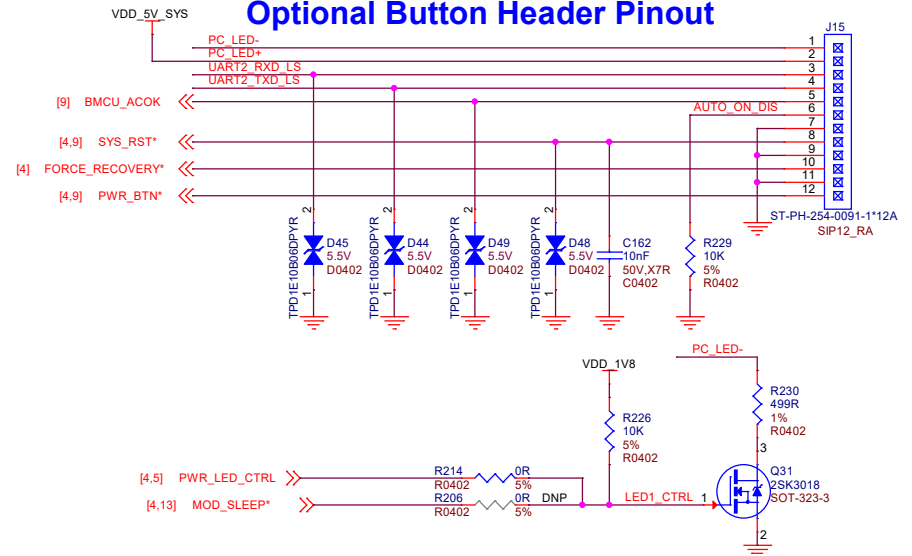

seeed studio

<https://www.seeedstudio.com>

Title: reComputer J202

Size: A3

Document Number: 20 Fan, Debug and EEPROM

Rev: V1.0

Draw By: Junqing.Xin

Date: Wednesday, August 21, 2024

Sheet: 20 of 20