
seeed studio

INDUSTRIAL PRODUCT DATASHEET

Jetson AGX Orin 32GB H01 Kit with Jetson AGX Orin 32GB Module

The Jetson AGX Orin 32GB H01 Kit is a hand-size edge AI device with up to 200 TOPS performance and rich I/O, suitable for applications including license plate detection, car detection, pedestrian detection, helmet detection, hard hat...

SKU	UPDATED	PRICE
114110207	2026-10-29 06:00:28	$1449.00(Excl. VAT)

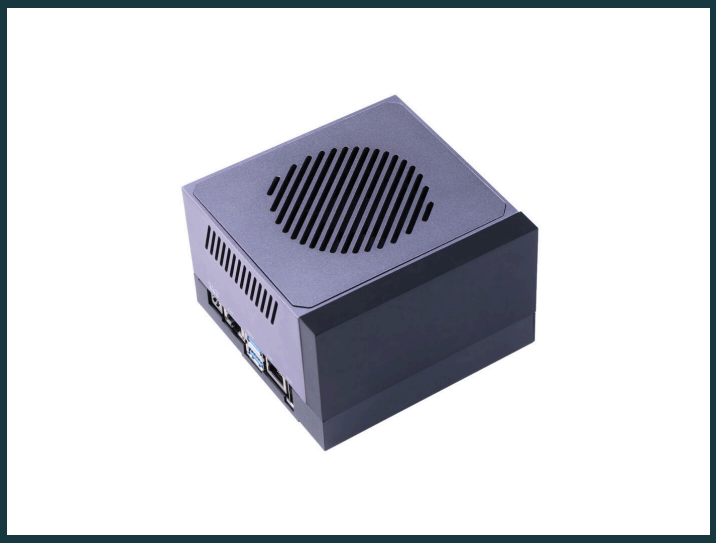

Overview



The Jetson AGX Orin 32GB H01 Kit with Jetson AGX Orin 32GB Module is a hand-size edge AI device measuring 107mm x 106.4mm x 70.5mm that delivers up to 200 TOPS AI performance with low power and low latency, offering up to 10X the performance of Jetson Xavier NX and up to 6X the performance of Jetson AGX Xavier. It includes the Jetson AGX Orin production module, a heatsink with cooling fan, enclosure, and power adapter, and provides PCIe X16, GbE, 10GbE, 3x USB 3.2, HDMI 2.1, M.2 Key M, M.2 Key E, 2.4/5GHz Wi-Fi, Bluetooth, 16-lane MIPI CSI-2, and a 40-Pin header, with JetPack 5.1.4 and Linux OS BSP pre-installed supporting Jetson software and leading AI frameworks and software platforms.


Key Features

Note

- For multi-RJ45 connectors and industrial-purpose replacement, please see **reComputer Mini J5011**.
- For developer kit replacement, please see **reComputer Classic J5011.**

- **Brilliant AI Performance for production:** on-device processing with up to 200 TOPS AI performance with low power and low latency, which offers up to **10X the performance of Jetson Xavier NX** and up to **6X the performance of Jetson AGX Xavier**.
- **Hand-size edge AI device:** compact size at 107mm x 106.4mm x 70.5mm, includes Jetson AGX Orin™ production module, a heatsink with a cooling fan, enclosure, and a power adapter.
- **Expandable with rich I/Os:** PCIe X16, GbE, 10GbE, 3x USB 3.2, HDMI 2.1, M.2 Key M, M.2 Key E, 2.4/5GHz Wi-Fi, Bluetooth, 16 lane MIPI CSI-2, 40-Pin header.
- **Accelerate solution to market**: pre-installed JetPack 5.1.4, Linux OS BSP, support Jetson software and leading AI frameworks and software platforms.The default account is username: nvidia, password: nvidia.

Product Gallery












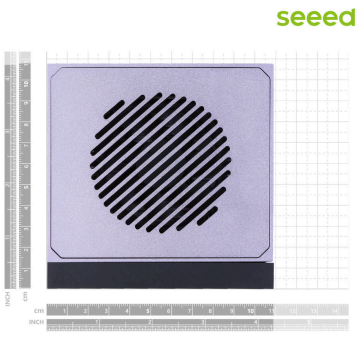

Specification


Specifications	Jetson AGX Orin 32GB H01 Kit	NVIDIA® Jetson AGX Orin™ Developer Kit: smallest and most powerful AI edge computer - Seeed Studio


AI Performance	200 TOPS	275 TOPS
GPU	1792-core NVIDIA Ampere GPU with 56 Tensor Cores	NVIDIA Ampere architecture with 2048 NVIDIA® CUDA® cores and 64 Tensor Cores
CPU	8-core NVIDIA Arm® Cortex A78AE v8.2 64-bit CPU 2MB L2 + 4MB L3	12-core Arm® Cortex®-A78AE v8.2 64-bit CPU 3MB L2 + 6MB L3
Memory	32 GB 256-bit LPDDR5 204.8 GB/s	
DL Accelerator	2 x NVDLA v2.0	
Vision Accelerator	1 x PVA v2.0	
Storage	64GB eMMC 5.1	
Video Encoder	1x 4K60 | 3x 4K30 | 6x 1080p60 | 12x 1080p30 (H.265) 1x 4K60 | 2x 4K30 | 5x 1080p60 | 11x 1080p30 (H.264)	2x 4K60 | 4x 4K30 | 8x 1080p60 | 16x 1080p30 (H.265)
Video Decoder	1x 8K30 | 2x 4K60 | 4x 4K30 | 9x 1080p60| 18x 1080p30 (H.265) 1x 4K60 | 2x 4K30 | 5x 1080p60 | 11x 1080p30 (H.264)	1x 8K30 | 3x 4K60 | 6x 4K30 | 12x 1080p60| 24x 1080p30 (H.265)
Display	1* HDMI 2.1	1* DisplayPort 1.4a (+MST)
Camera	1* 16 lane MIPI CSI-2 connector	
Networking	1* GbE 1* 10GbE	1* 10GbE
USB	2x USB 3.2 Type-A (Integrated USB 2.0), 1x USB 3.2 Type-C (Integrated USB 2.0)	2x USB 3.2 Gen2 Type-Cwith USB-PD support 4x USB 3.2 Gen2 Type-A USB 2.0 Micro-B
M.2 Key M	1* M.2 Key M	
M.2 Key E	1* M.2 Key E (pre-installed WIFI+BT：BL-M8822CP1	/
Fan	1* 4-pin fan (5V PWM)	1* 4-pin fan
microSD card slot	1 * microSD card slot	
Audio Jack	1* 3.5mm audio jack	/
RTC	2-pin RTC	
RS485	1* RS485(3P 1.5mm pitch)	/
RS232	1* RS232(3P 1.5mm pitch)	/
Others	40-pin header, 1* SPI Bus(+3.3V Level), 6* GPIO(+3.3V Level), 1x CAN, Force Recovery, Reset and Power ON/ OFF buttons, 12V/2A 2-pin power output	40-pin header, 12-pin automation header, 10-pin audio panel header, 10-pin JTAG header, Force Recovery, and Reset buttons
Power Supply	9~20V DC Input @ 8A	19V via USB Type-C
Mechanical	107mm x 106.4mm x 70.5mm	110mm x 110mm x 71.65mm
Operating Temperature	-25 ºC to +70 ºC	0 ºC to 35 ºC

Plug Center	Positive (+)
Outer Shell	Negative (-)

Plug Center	Positive (+)
Outer Shell	Negative (-)

Hardware Overview

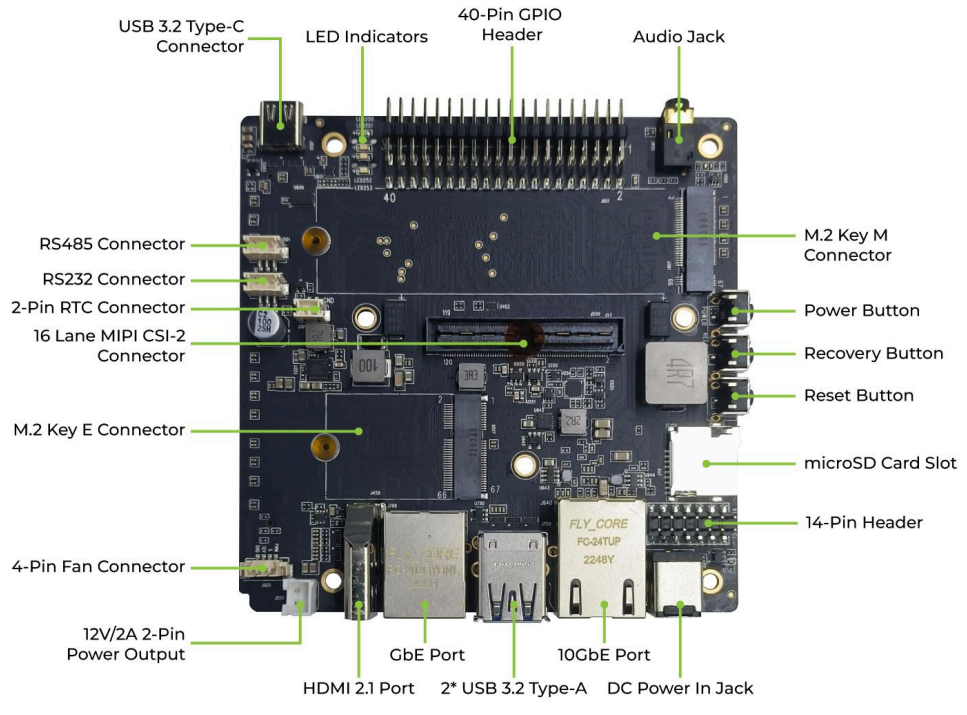

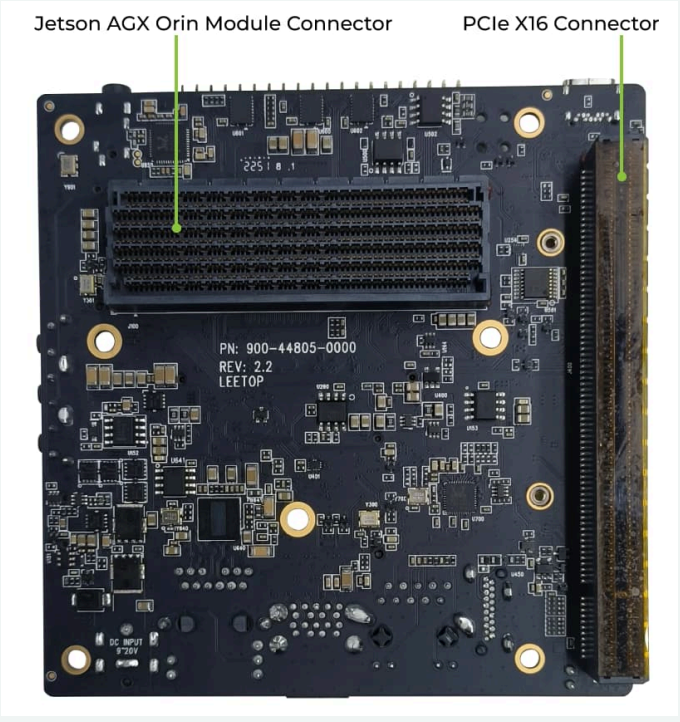

Applications

- **License plate detection**
- **Car detection**
- **Pedestrian detection**
- **Helmet detection**
- **Hard hat detection**
- **Custom PPE detection**
- **Visual Anomaly Detection**
- **Sentiment analysis**
- **Retail store items detection**
- **Under-ice sensing ROV**
- **Warehouse towing robot**
- **Wildfire detection**

Part List

Jetson AGX Orin 32GB	×1
Seeed carrier board	×1
Aluminum heatsink with fan	×1
Aluminum case	×1
19V/4.74A(Barrel Jack 5.5/2.5mm) power adapter	×1
Wi-Fi/BT module(BL-M8822CP1)	x1

Compliance & Logistics



HSCODE	8471504090
USHSCODE	8517180050
UPC	
EUHSCODE	8471707000
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- https://www.seeedstudio.com/AGX-Orin-32GB-H01-Kit-p-5569.html
- Jetson AGX Orin 32GB H01 Kit Datasheet
- Seeed Nvidia Jetson Product Catalog
- Nvidia Jetson Product Comparison
- Seeed Nvidia Jetson Success Cases
- Seeed Jetson One Pager

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com