

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T +30%G, F UL94V-0, 颜色: 黑色.

Housing: PA6T +30%G, F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1.0u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40℃ to+105℃

Temperature Range: -40℃ to+105℃

Ordering Information

P125-11 06 A1 B S 116 A 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating Full of Gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm	2-40P	A0=0.8u"	B: PA6T	B: 1.0u"	A: PE Bag
17:1.7mm		A1=1u"	C: PA6T	B1=10u"	B: Tape & Reel
20:2.0mm		A2=1.5u"	D: LCP	B2=1.5u"	D: Tube+CAP
25:2.54mm		A3=2u"		B3=2u"	E: Tray
30:3.0mm		A4=3u"		B4=3u"	
		A5=5u"		B5=5u"	
		A6=10u"		B6=10u"	
		A7=15u"		B7=15u"	
		A8=20u"		B8=20u"	
		A9=30u"		B9=30u"	
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

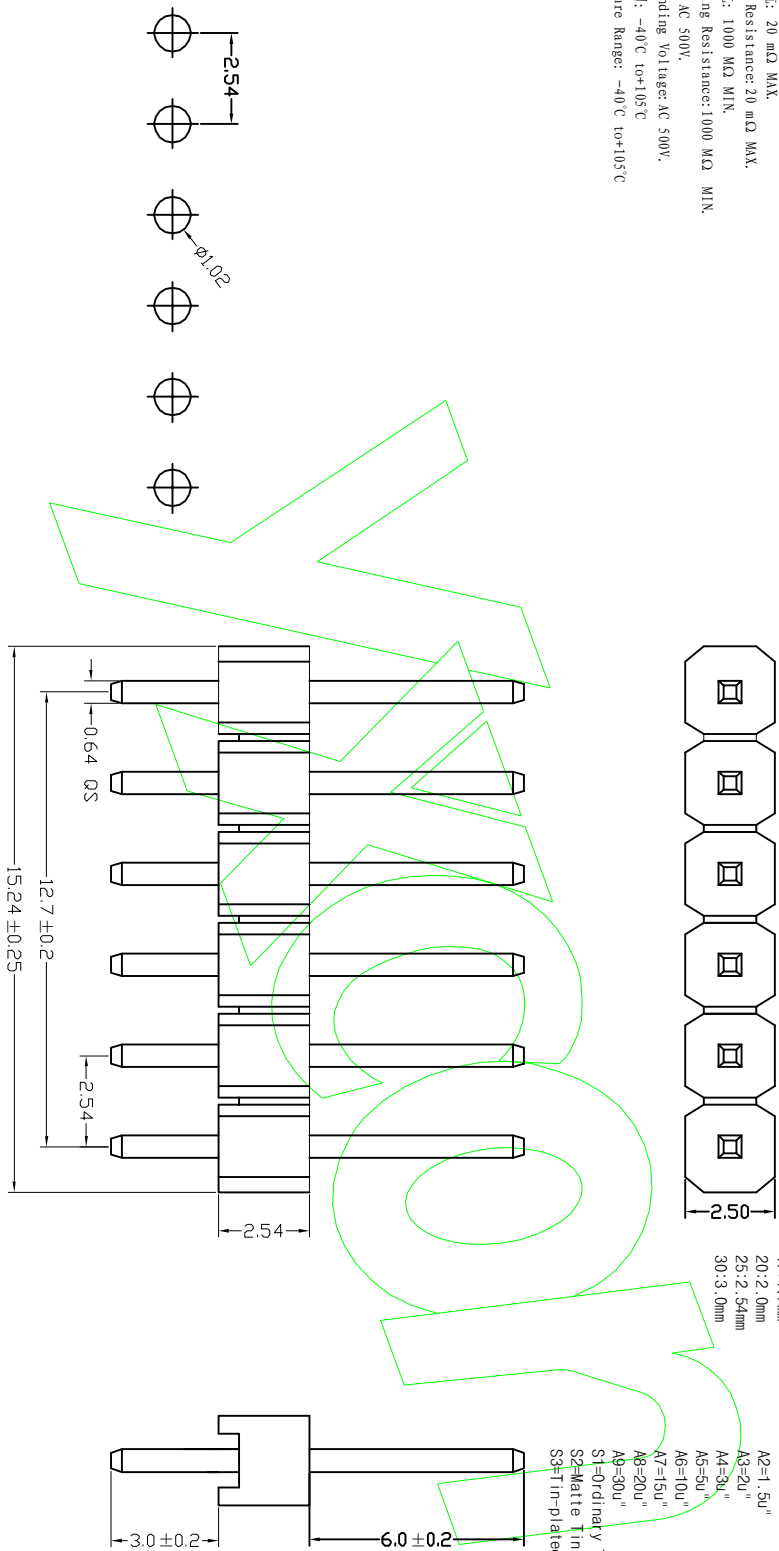

OPERATION	SCALE		Fit	DESIGN		PART NO.	TITLE:
	UNIT	MM					
X.X	±0.25						
X.XX	±0.20	A4					
X.XXX	±0.10	SIZE					
Angle	±3°	SHEET	1/1	CHECK			
DIM	TOL.	PROJ.		APPROVE			
DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE				

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.

P125-11 06 A1 B S 116 A 1

2.54mm 单排针180度 1*6P L=1.6/3.0