




F185-21 10 A0 A SY A 1

Temperature Range: -40°C to +105°C

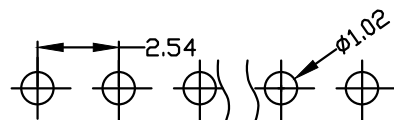

Plastic Layers	NO.OF PINS PER ROW 1~40P	Contact Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Plating Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	INSULATOR MATERIAL: A:PBT B:PA6T C:PA9T D:LCP	PACKING A:PE Bag B:Tape + Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

						OPERATION		SCALE		Fit		<div> 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.</div>			
						X.X	±0.25	UNIT		MM					
						X.XX	±0.20	SIZE	A4	DESIGN	庞国杰	PART NO.	F185-2110A0ASYA1		
						X.XXX	±0.10								
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54mm 单排母 塑高8.5+2.5排针(蓝色) PC104端子 1*10P*2 镀普金 PBT 180度 Y型 袋装		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		DIM	TOL	PROJ.		APPROVE		Customer No.			