

	1	2	3	4	5	6	7	8
A								
B								
C								
D								
E								
F								

01 Description



文件: 01 Description.kicad_sch

02 Block Diagram



文件: 02 Block Diagram.kicad_sch

03 POWER



文件: 03 POWER.kicad_sch

04 ESP32S3&EXP



	1	2	3	4	5	6	7	8
A								
B								
C								
D								
E								
F	1	2	3	4	5	6	7	8

Revision History			
DATE	REVISION	DESCRIPTION	
2026/04/22	V01	Initial release.	



Sheet: /01 Description/
File: 01 Description.kicad_sch

CC BY-SA 4.0

Title:


Size: A3


KiCad E.D.A. 10.0.0-19-g65df3ab11c


Date:


Id: 2/9

Rev:

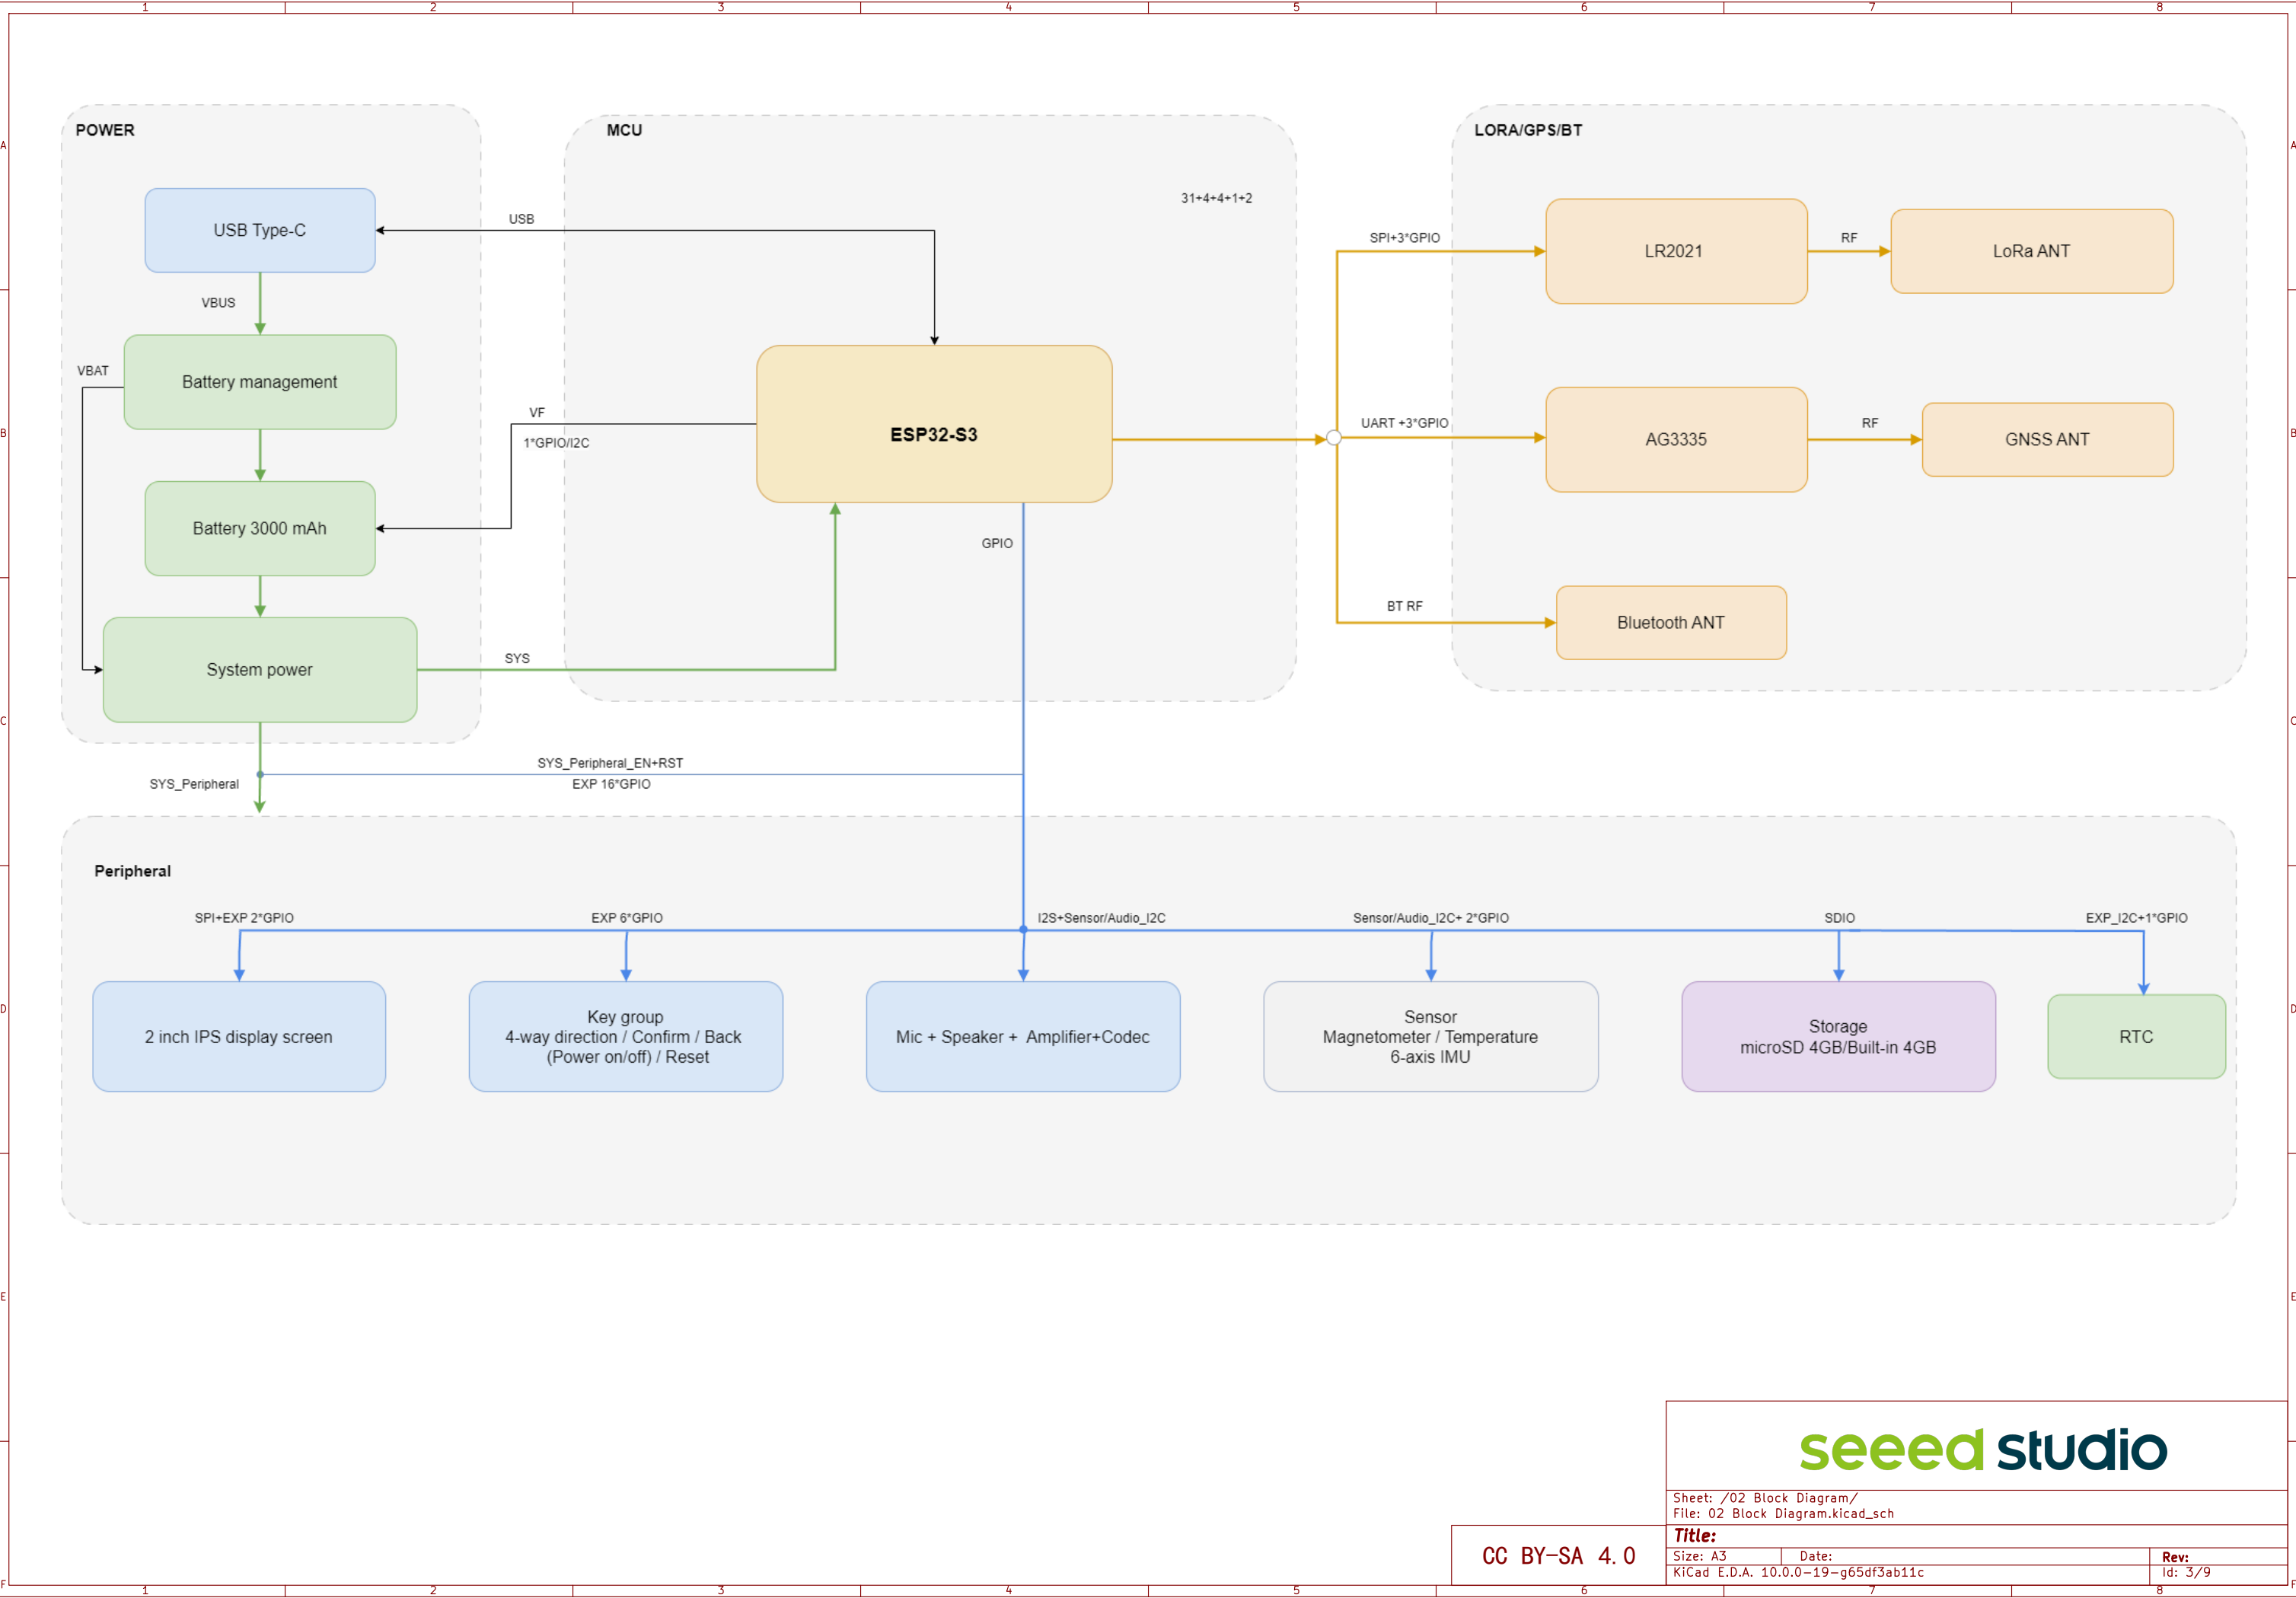

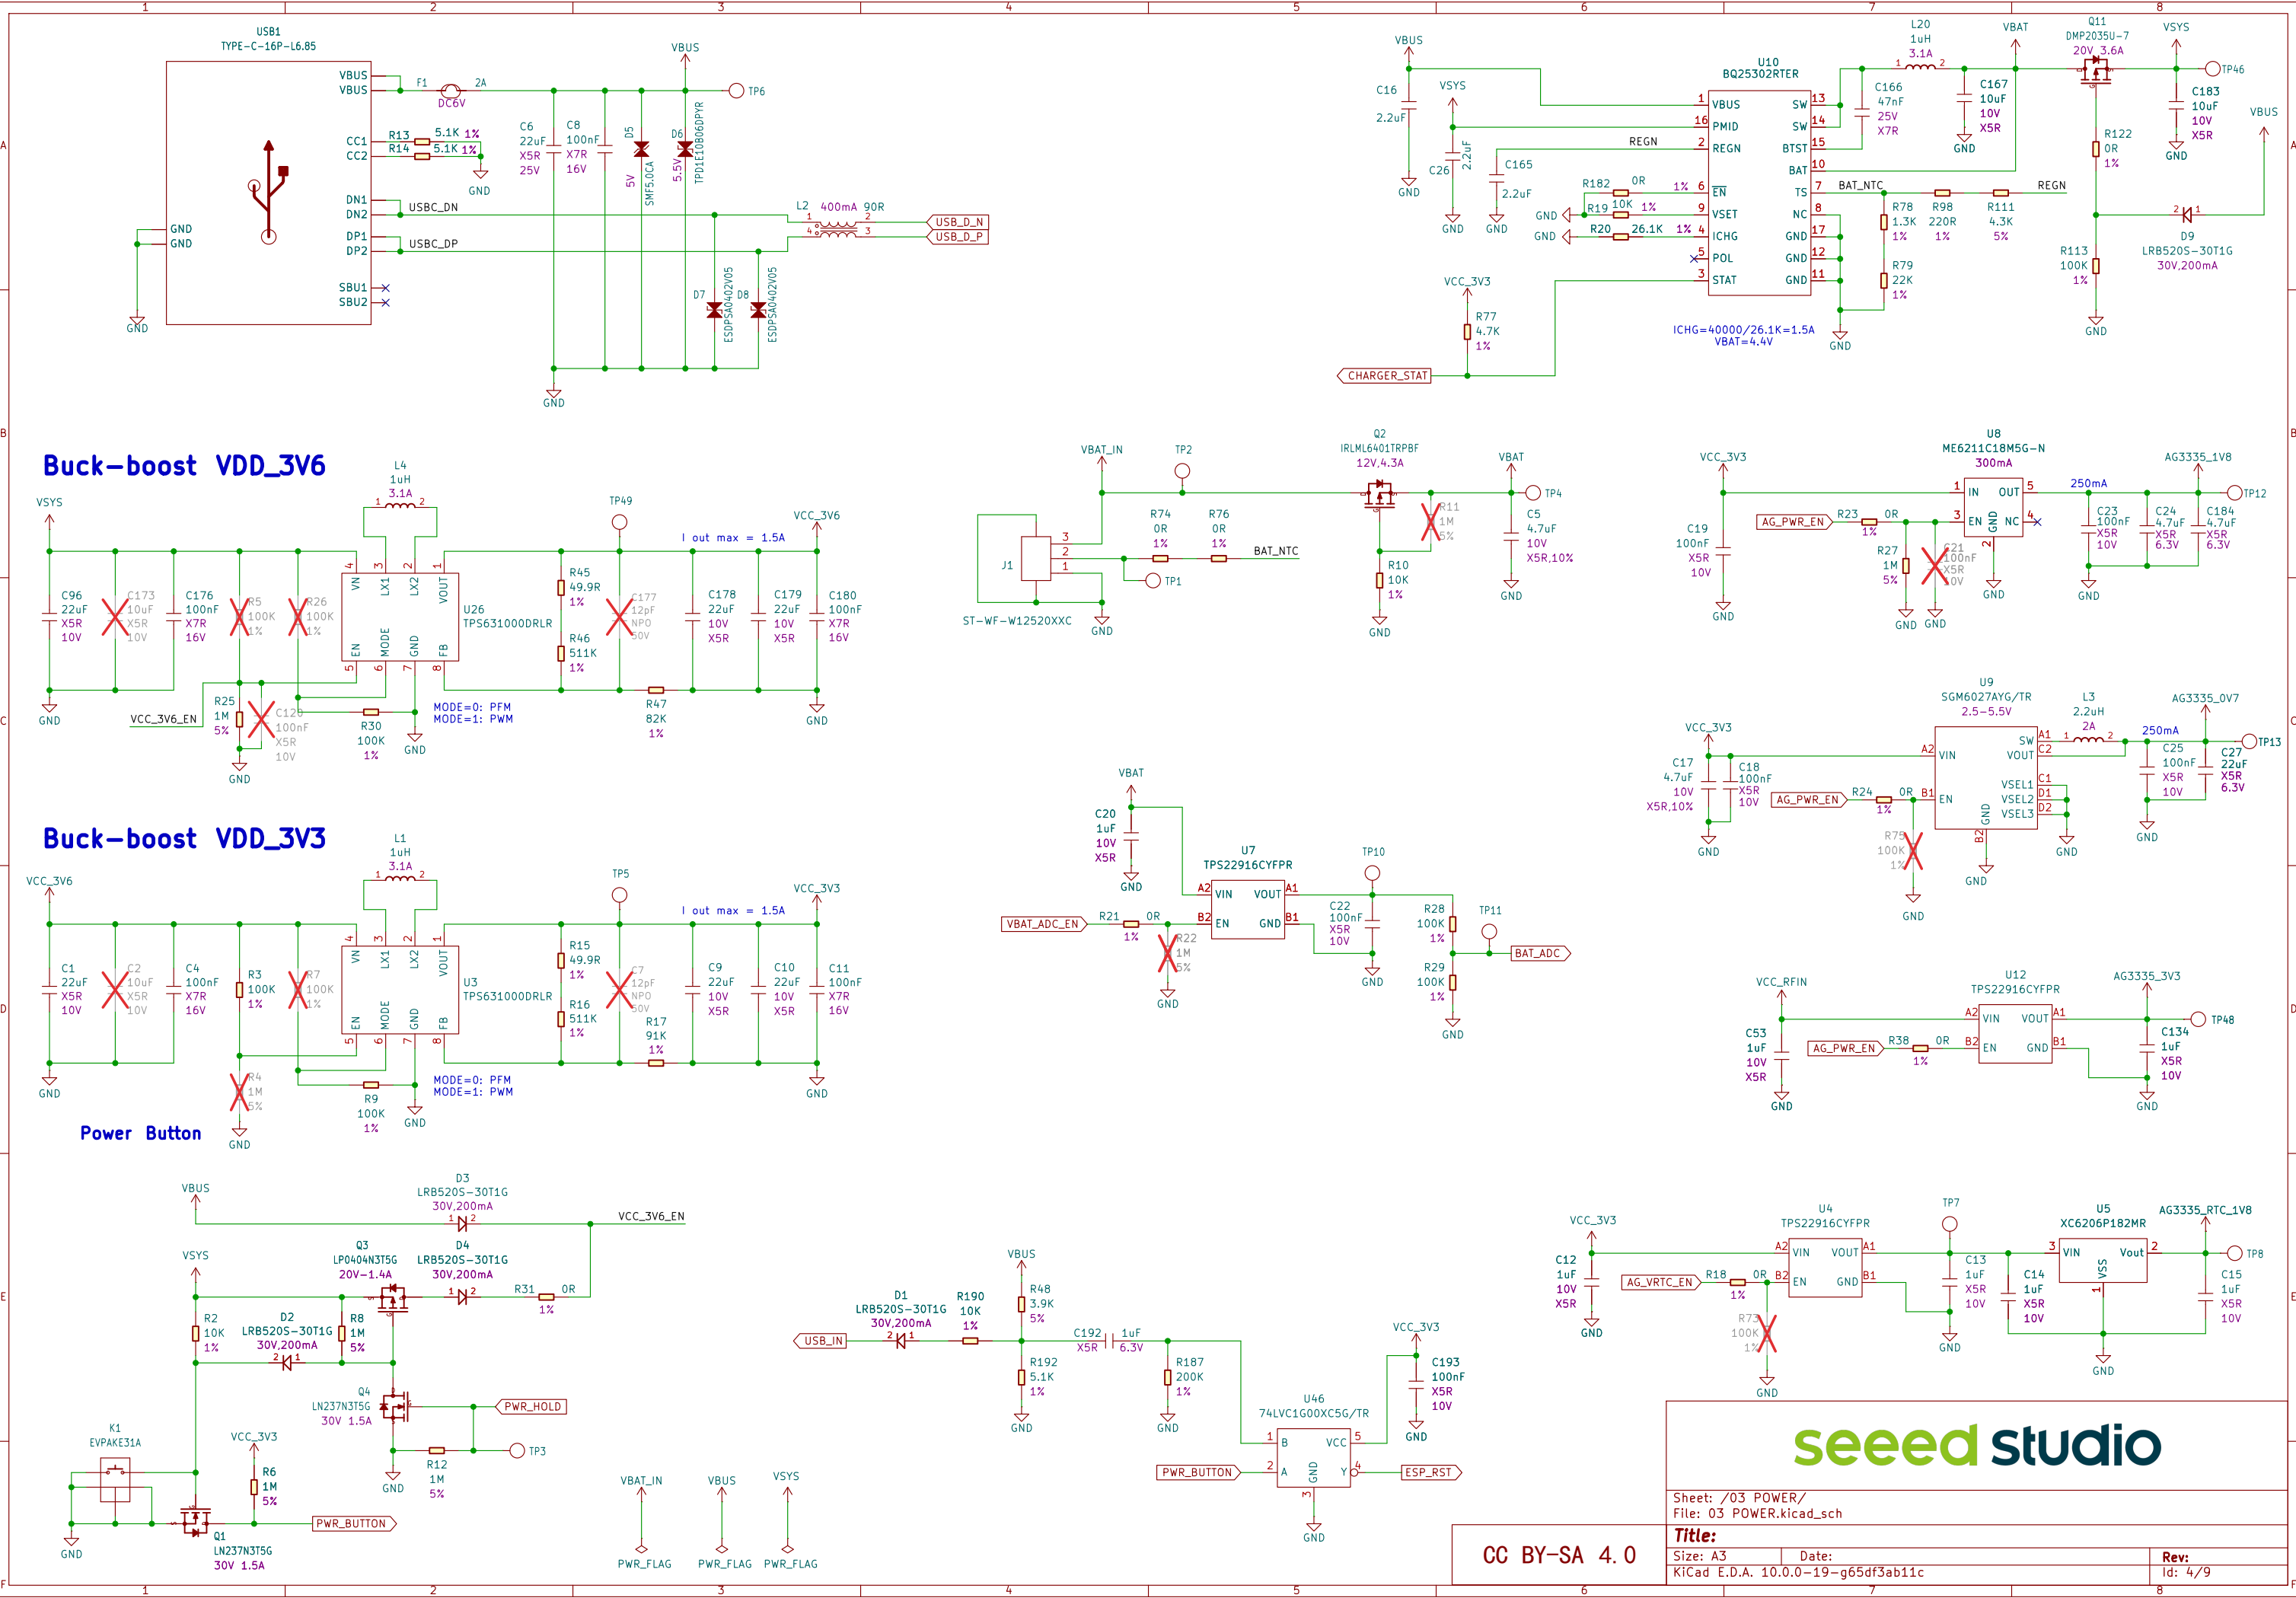

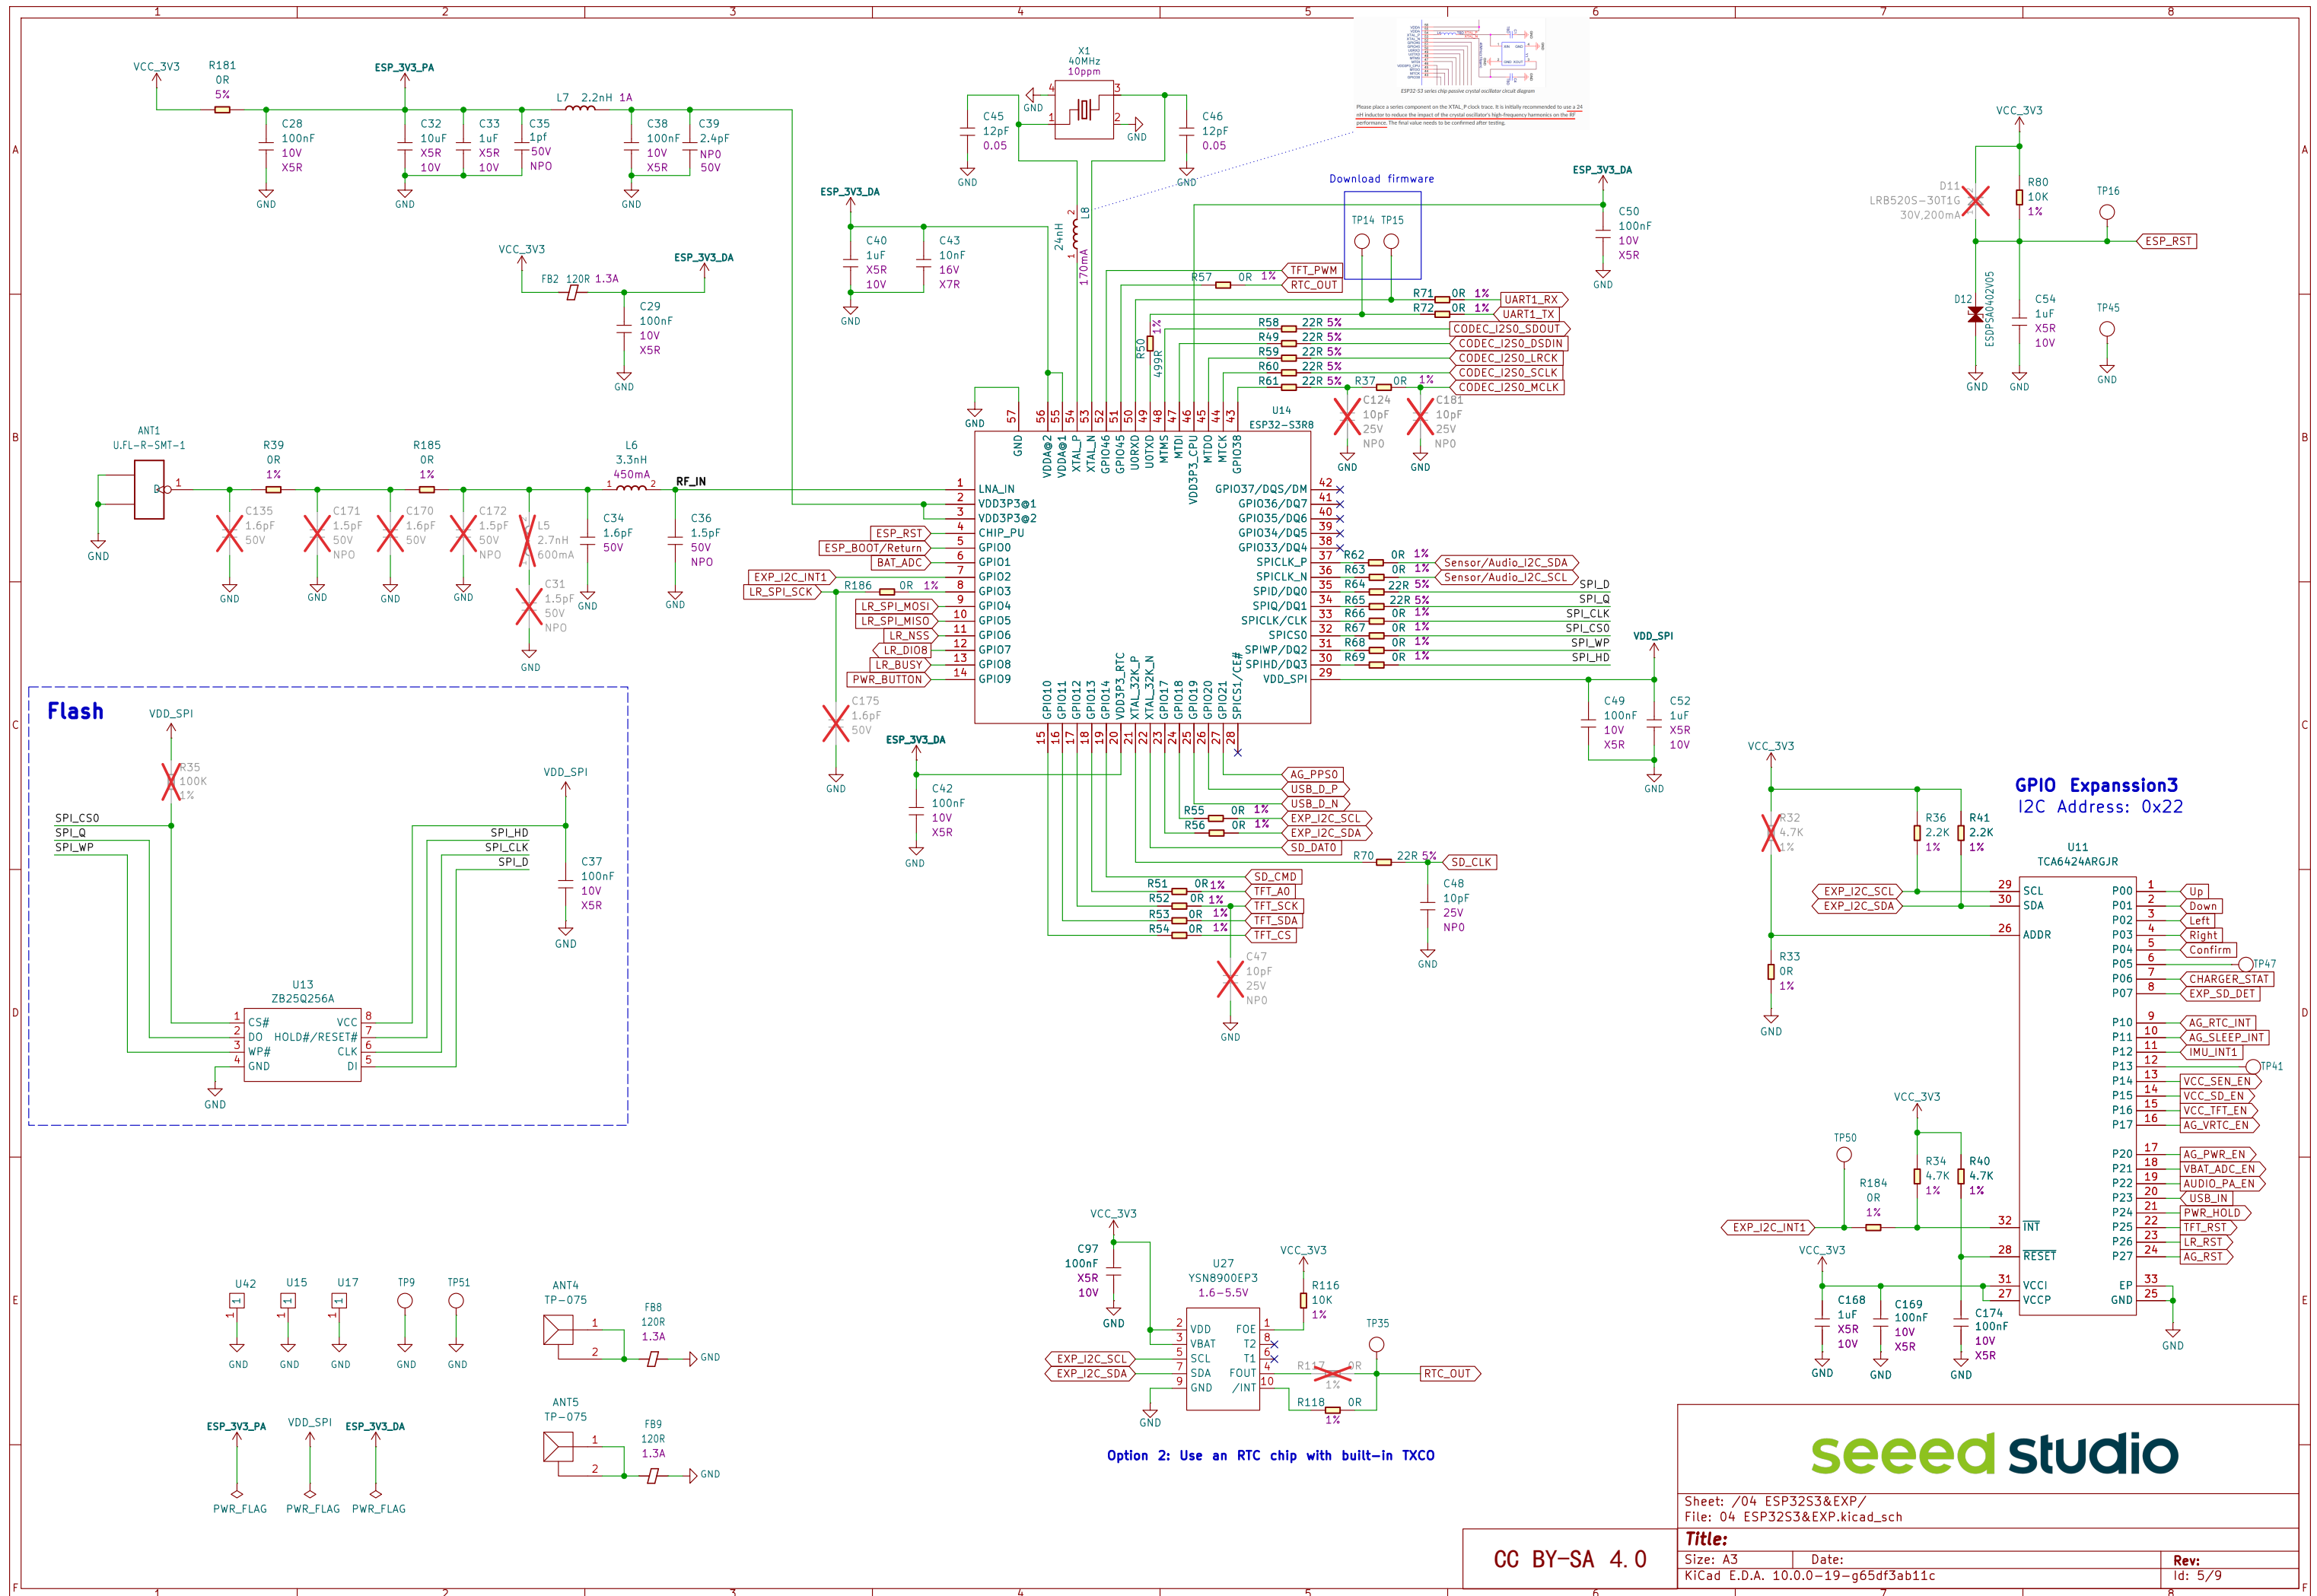


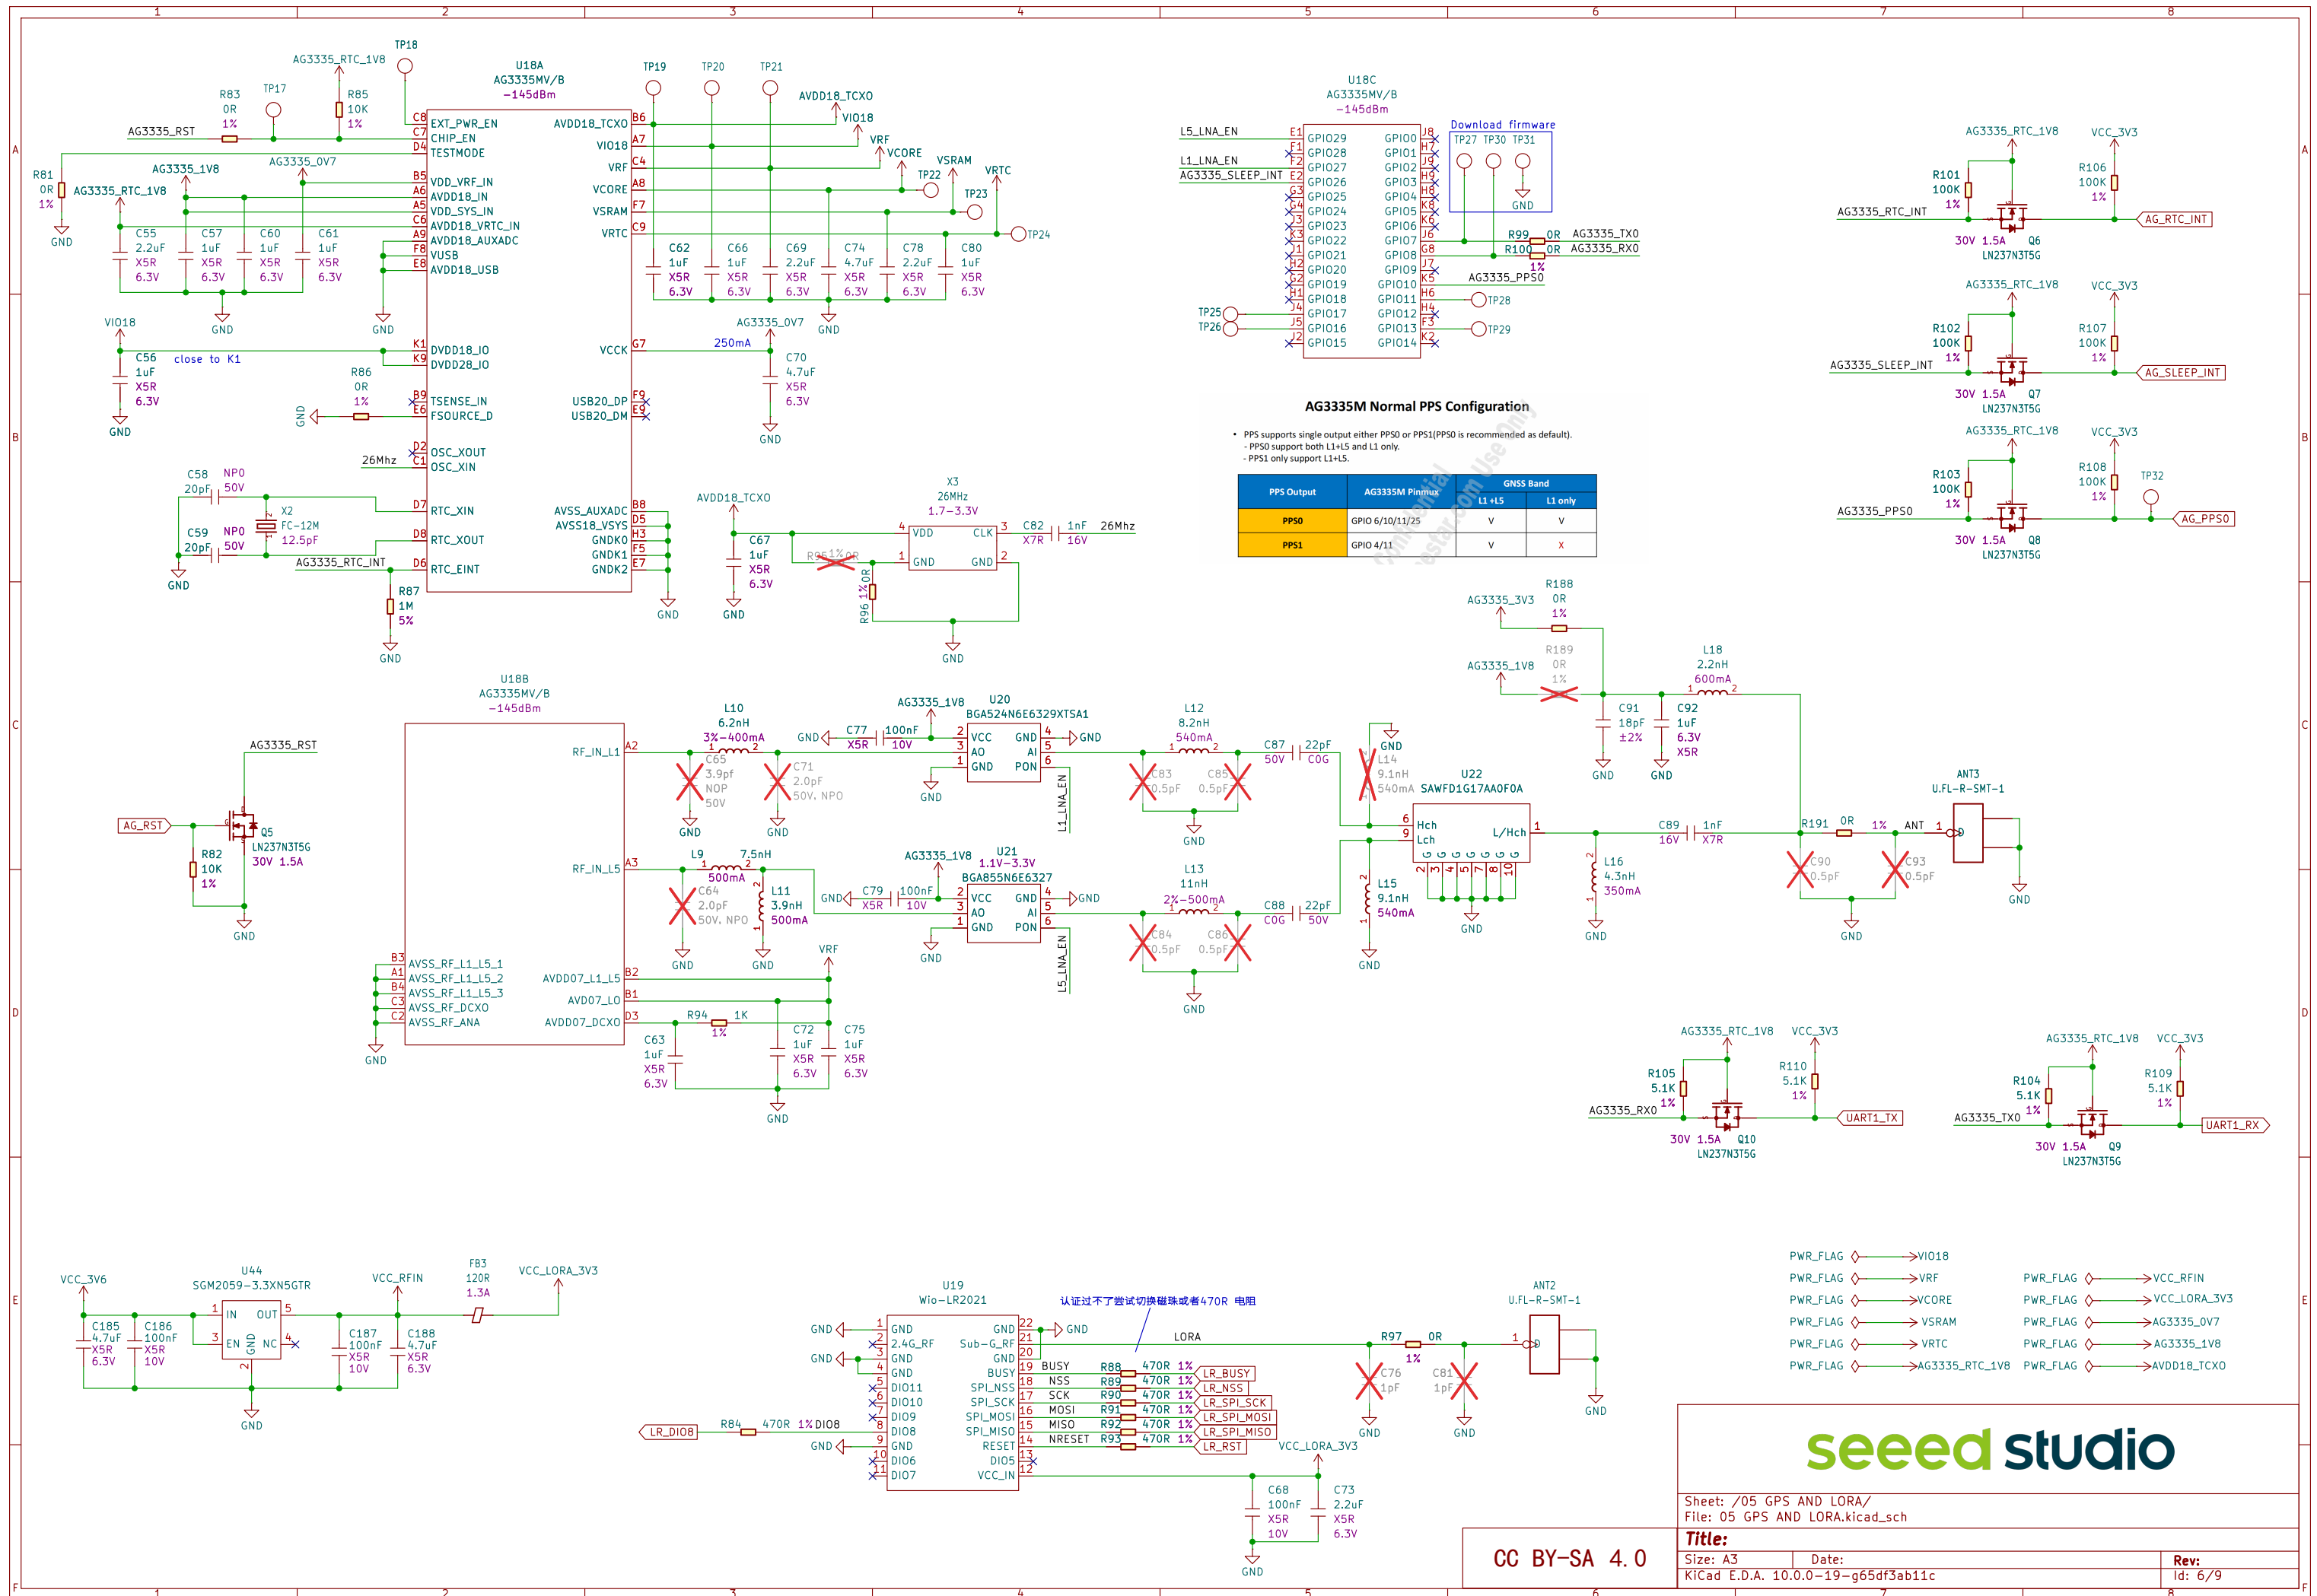


AG3335M Normal PPS Configuration

- PPS supports single output either PPS0 or PPS1 (PPS0 is recommended as default).
- PPS0 support both L1+L5 and L1 only.
- PPS1 only support L1+L5.

PPS Output

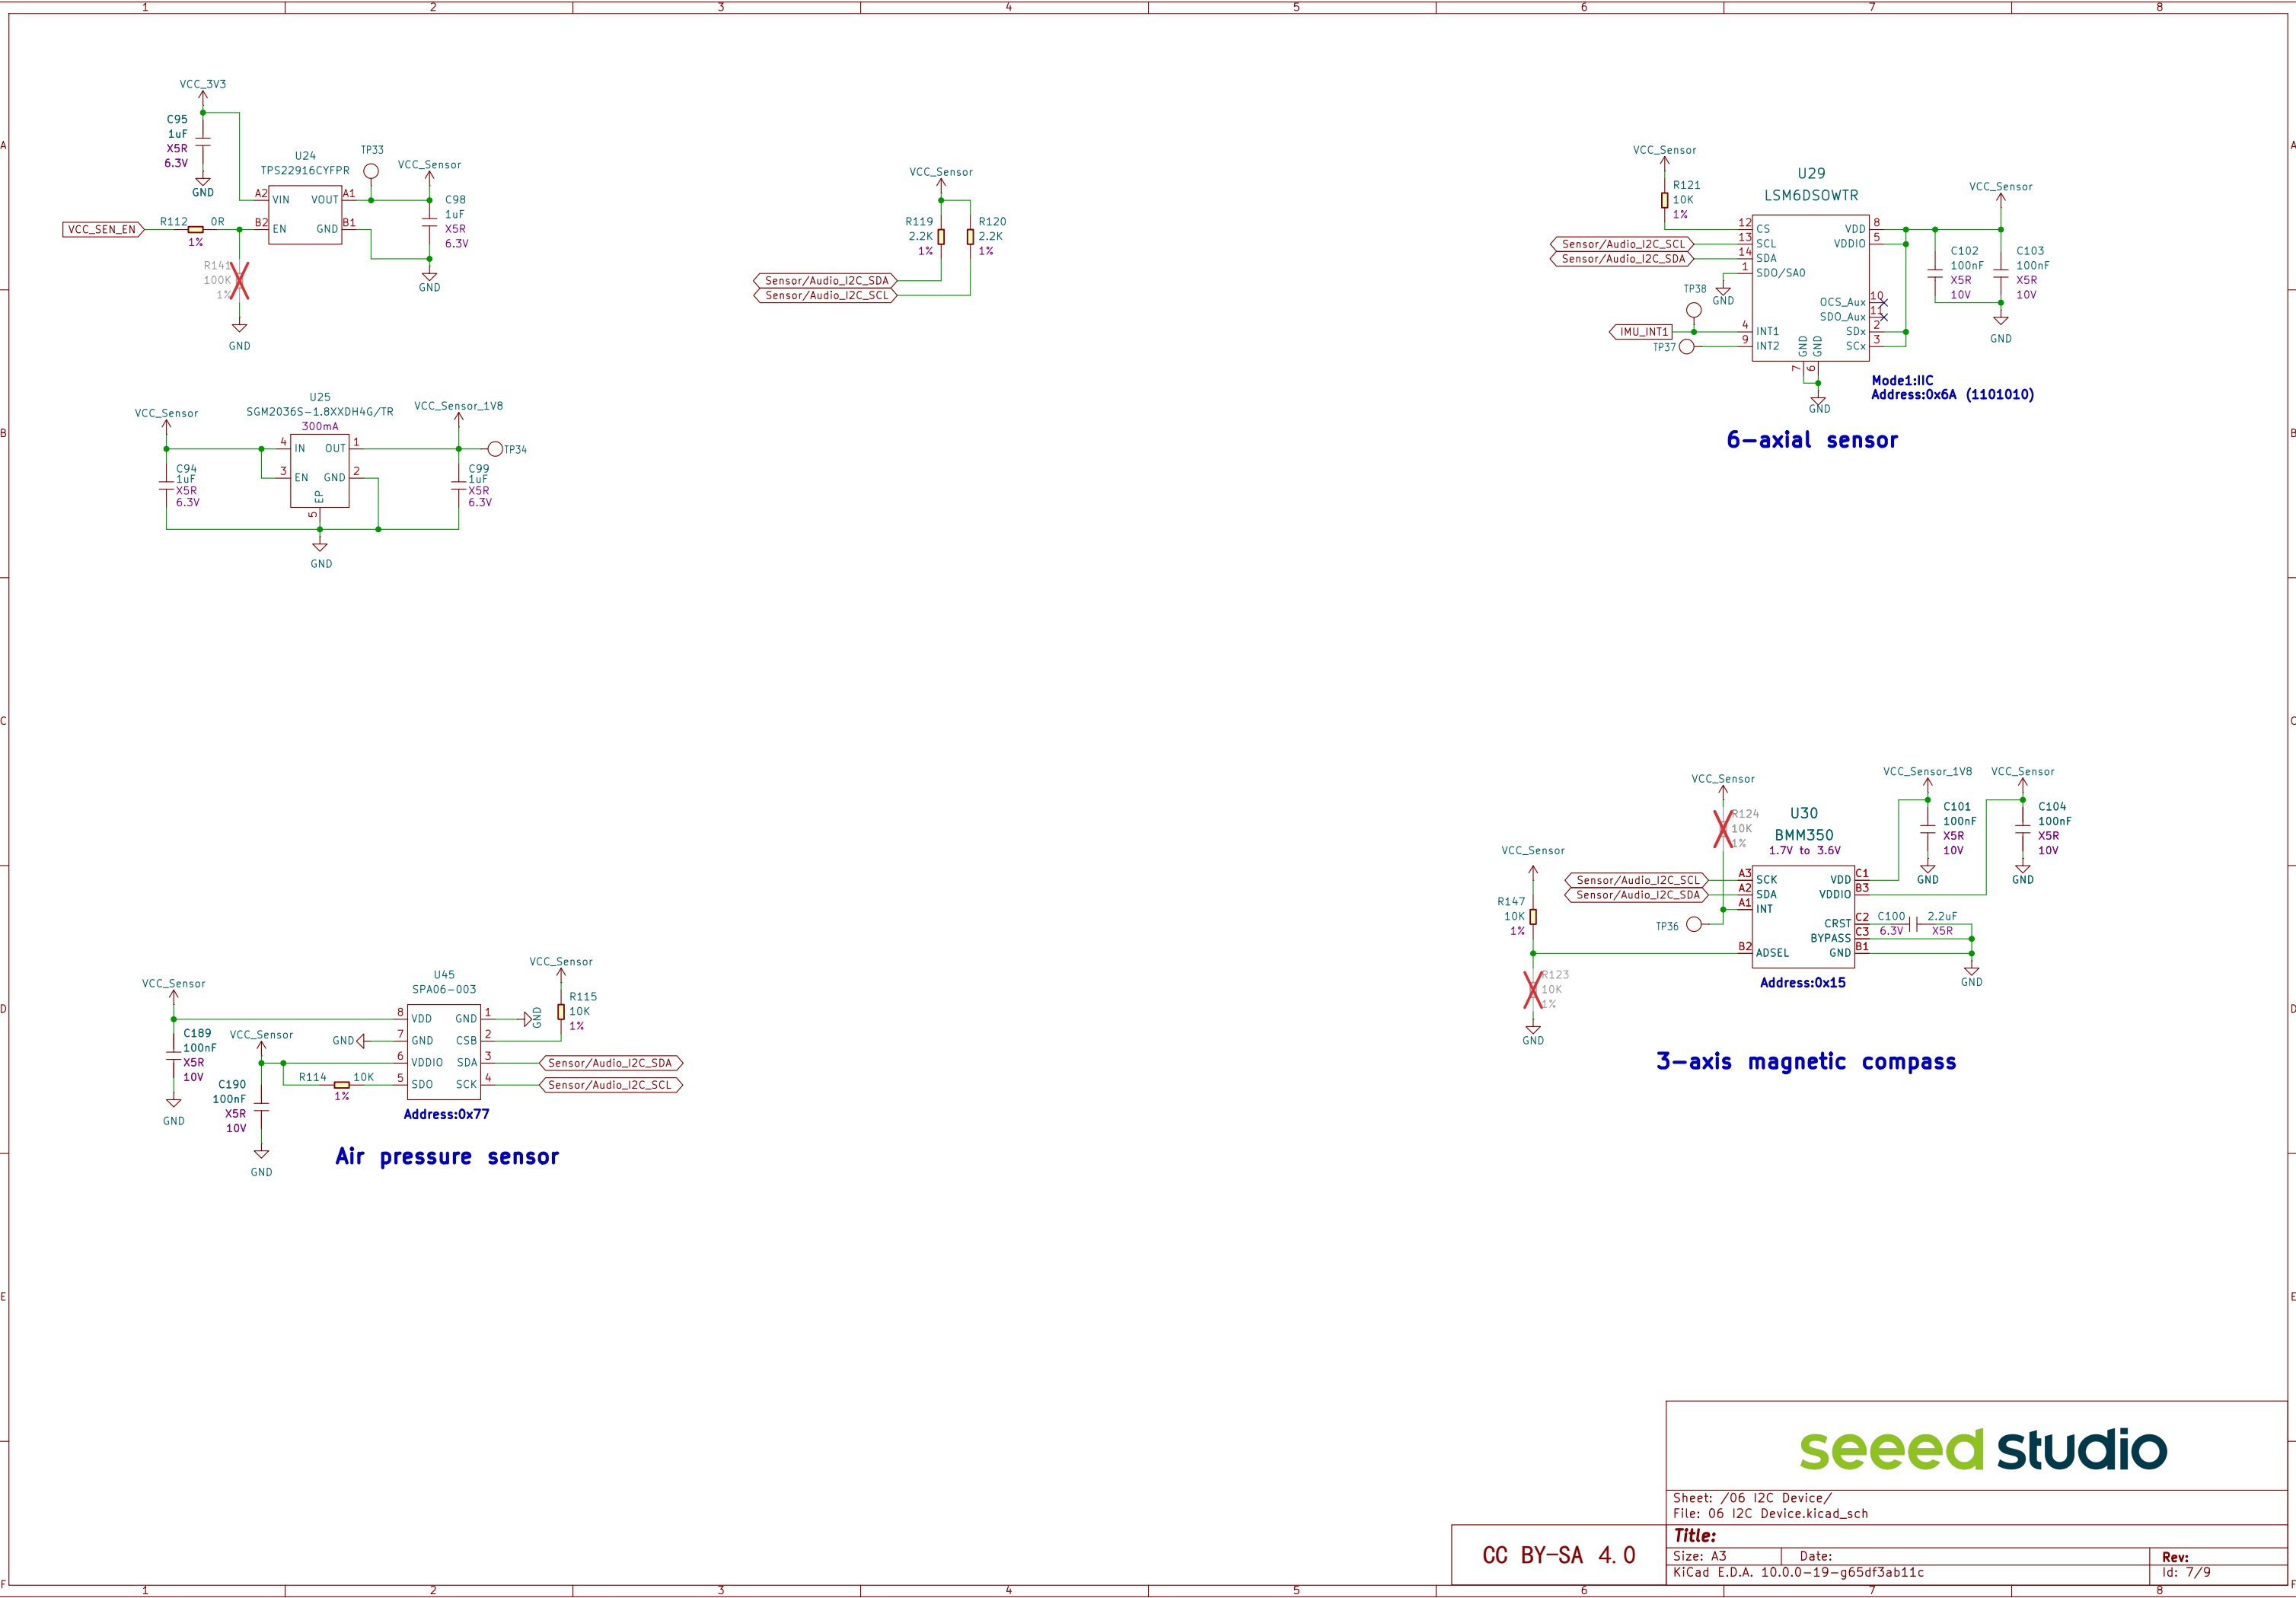

Micro SD

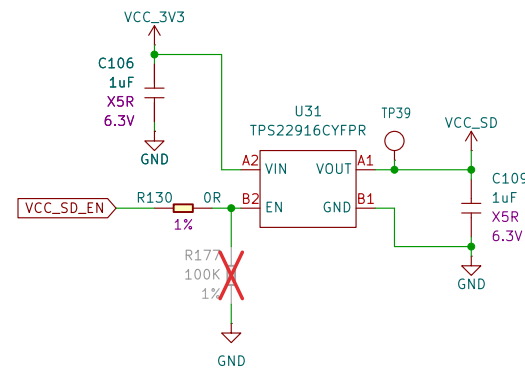

TF CARD

