


Criteria #1: Guest Policy

Policy Excerpt (4.1 Guest Policy):

- Guests are only allowed access to the designated "Guest-WiFi" network (VLAN 200)
- The "Guest Wi-Fi" must be isolated from all Zero Day Inc. systems and data
- Guest traffic limited to Internet/DNS access only
- Guest VLAN cannot access internal server VLANs (25-29, 34) or employee VLANs (100)

VLAN Isolation

NOC-Dist-Sw

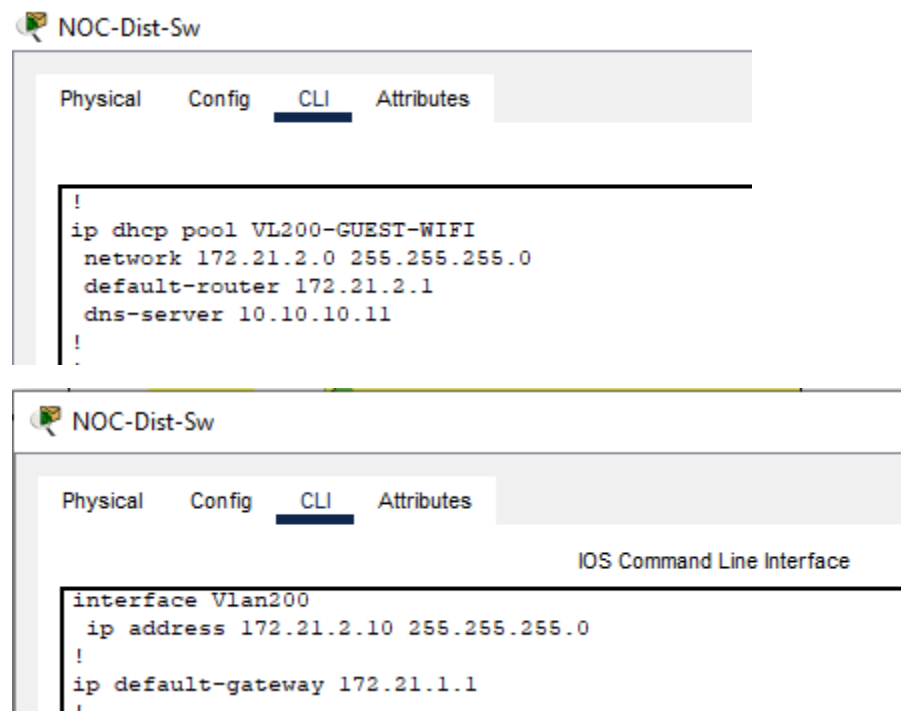

The image displays two screenshots of the NOC-Dist-Sw configuration interface. The top screenshot shows the CLI tab with the following configuration:

```
!
ip dhcp pool VL200-GUEST-WIFI
 network 172.21.2.0 255.255.255.0
 default-router 172.21.2.1
 dns-server 10.10.10.11
!
```

The bottom screenshot shows the CLI tab with the following configuration:

```
interface Vlan200
 ip address 172.21.2.10 255.255.255.0
!
ip default-gateway 172.21.1.1
!
```

Both screenshots show the 'Physical', 'Config', 'CLI', and 'Attributes' tabs, with 'CLI' being the active tab. The bottom screenshot also includes the text 'IOS Command Line Interface'.

Floor1

Floor1-Access

Physical Config **CLI** Attributes

IOS Command Line I

```
switchport trunk allowed vlan 2-99,101-1001
switchport mode trunk
!
interface Vlan1
no ip address
shutdown
!
interface Vlan100
ip address 172.21.1.11 255.255.255.0
!
interface Vlan200
ip address 172.21.2.11 255.255.255.0
!
```

Floor2

Floor2-Access

Physical Config **CLI** Attributes

IOS Command

```
description uplink trunks
switchport trunk allowed vlan 2-99,101-1001
switchport mode trunk
!
interface Vlan1
no ip address
shutdown
!
interface Vlan100
ip address 172.21.1.12 255.255.255.0
!
interface Vlan200
ip address 172.21.2.12 255.255.255.0
!
```

Floor3

Floor3-Access

Physical Config CLI Attributes

IOS Comr

```
description Trunk to NOC and Floor4
switchport trunk allowed vlan 2-99,101-1001
switchport mode trunk
!
interface Vlan1
no ip address
shutdown
!
interface Vlan100
ip address 172.21.1.13 255.255.255.0
!
interface Vlan200
ip address 172.21.2.13 255.255.255.0
!
```

Floor4

Floor4-Access

Physical Config CLI Attributes

IOS Command Line Interface

```
description Trunk to NOC and Floor3
switchport trunk allowed vlan 2-99,101-1001
switchport mode trunk
!
interface Vlan1
no ip address
shutdown
!
interface Vlan100
ip address 172.21.1.14 255.255.255.0
!
interface Vlan200
ip address 172.21.2.14 255.255.255.0
!
```

ASA5506-INTERNAL

```

object network GUEST
 subnet 172.21.2.0 255.255.255.0
 nat (guest,outside) dynamic interface
object network INSIDE
 subnet 172.21.1.0 255.255.255.0
 nat (inside,outside) dynamic interface
!
route outside 0.0.0.0 0.0.0.0 199.199.199.17 1
!
access-list PUBLIC_TRAFFIC extended permit icmp any host 199.199.199.18
access-list PUBLIC_TRAFFIC extended permit tcp any host 199.199.199.18 eq www
access-list PUBLIC_TRAFFIC extended permit udp any host 199.199.199.18 eq domain
access-list PUBLIC_TRAFFIC extended permit icmp 172.21.2.0 255.255.255.0 host
199.199.199.1
access-list PUBLIC_TRAFFIC extended permit icmp any host 199.199.199.1

```

Criteria #2: Authentication / Password Policy applied “GPO” Policy Excerpt (4.2 Authentication Policy):

- Minimum length of 10 characters
- Must include uppercase, lowercase, number, and special character
- Account lockout after 3 failed attempts
- Passwords must be changed every 30 days

Default Domain Policy	
Policy	Setting
Account Policies/Password Policy	
Enforce password history	0 passwords remembered
Maximum password age	30 days
Minimum password age	1 days
Minimum password length	10 characters
Password must meet complexity requirements	Enabled
Store passwords using reversible encryption	Disabled
Account Policies/Account Lockout Policy	
Account lockout duration	30 minutes
Account lockout threshold	3 invalid login attempts
Reset account lockout counter after	30 minutes
Account Policies/Kerberos Policy	

Criteria #3: Network Security Policy – Wireless Policy Excerpt (4.3 Wireless Policy):

- Separate VLANs for employee (100) and guest (200) wireless networks
- WPA3-Enterprise encryption required
- MAC address filtering for internal Wi-Fi
- Wireless signal containment

Floor3-Access

Floor3-Access

Physical Config **CLI** Attributes

IOS

```
spanning-tree extend system-id
!
interface GigabitEthernet0/1
description PC3
switchport access vlan 200
switchport mode access
!
interface GigabitEthernet1/1
description Employee WiFi
switchport access vlan 200
switchport mode access
!
```

show vlan brief

VLAN	Name	Status	Ports
1	default	active	Gig2/1, Gig3/1, Gig4/1, Gig5/1 Gig6/1, Gig7/1
100	VLAN0100	active	
200	Guest	active	Gig0/1, Gig1/1
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

Floor3-Access#RADIUS logs

Employee WiFi AP

Physical Config **GUI** Attributes

Internet Setup

Internet Connection type: Automatic Configuration - DHCP

Optional Settings (required by some internet service providers)

Host Name:

Domain Name:

MTU: Size: 1500

Network Setup

Router IP

IP Address: 172 . 21 . 1 . 15


Subnet Mask: 255.255.255.0

DHCP Server Settings

DHCP Server: ☐ Enabled ☒ Disabled

DHCP Reservation

Help...

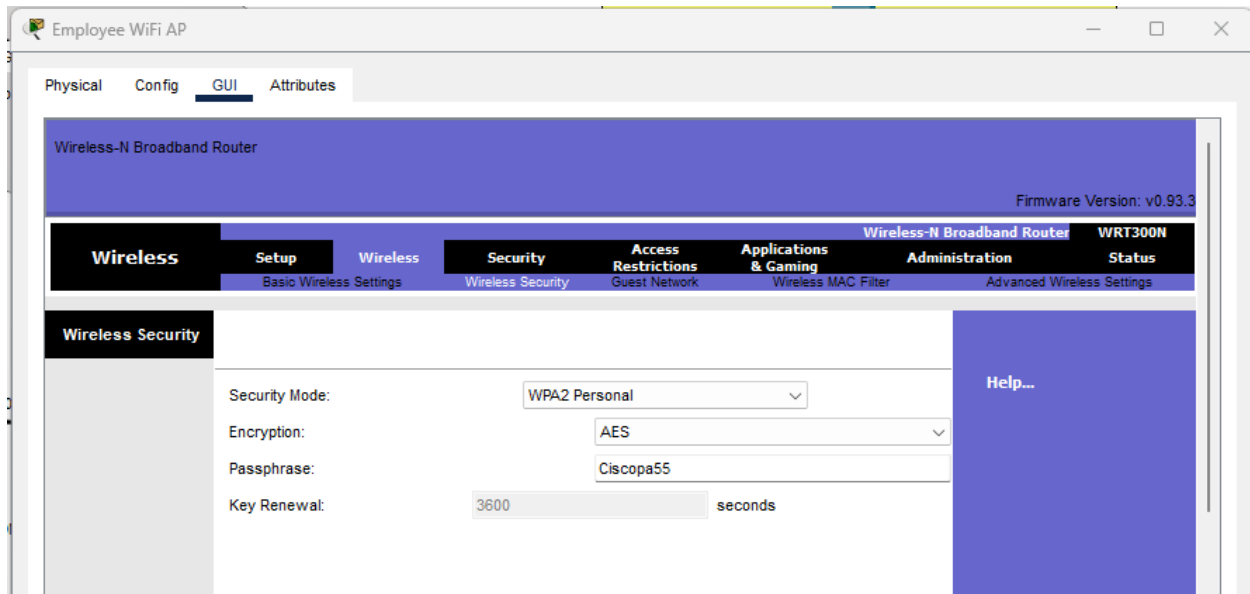

Criteria #4: Network Security Policy - Firewall & ACL Policy Excerpt (5.1 Firewall Policy):

- Default deny all incoming traffic
- DMZ servers on isolated VLANs (100-140)
- Restrict traffic between DMZ and internal network
- Log all significant events

ASA5506 Firewall

```
*ASA internal running-config-AMT - Notepad
File Edit Format View Help
!
access-list PUBLIC_TRAFFIC extended permit icmp 172.21.2.0 255.255.255.0 host 199.199.199.1
access-list PUBLIC_TRAFFIC extended permit icmp any host 199.199.199.1
access-list PUBLIC_TRAFFIC extended permit icmp any host 199.199.199.18
access-list PUBLIC_TRAFFIC extended permit tcp any host 199.199.199.18
access-list PUBLIC_TRAFFIC extended permit udp any host 199.199.199.18
!
!
access-group PUBLIC_TRAFFIC in interface outside
!
```

DMZ ASA

```
*ASA DMZ running-config-AMT - Notepad
File Edit Format View Help
!
access-list OUTSIDEIN extended permit icmp any any
access-list OUTSIDEIN extended permit tcp any host 199.199.199.11 eq www
access-list OUTSIDEIN extended permit tcp any host 199.199.199.11 eq 443
access-list OUTSIDEIN extended permit tcp any host 199.199.199.11 eq domain
!
!
access-group OUTSIDEIN in interface outside
```

Criteria #5: Network Security Policy – Router/Switch: Perimeter Router Policy Excerpt (5.2 Router/Switch Policy):

- VLAN segmentation by function
- Disable unused ports
- Secure management access
- Regular configuration backups

DMZ Switch

```
DMZ Switch
Physical Config CLI Attributes
IOS Command
!
interface FastEthernet0/1
description ASA DMZ
switchport access vlan 199
switchport mode access
!
interface FastEthernet0/2
description DMZ Server
switchport access vlan 199
switchport mode access
!
```

```
DMZ Switch
Physical Config CLI Attributes
IOS Command Line Inter
!
ip default-gateway 10.10.10.1
.
```

NOC-Dist-Sw

NOC-Dist-Sw

Physical Config CLI Attributes

IOS Command Line Interface

```
!  
interface GigabitEthernet6/1  
  description Trunk Ports  
  switchport trunk allowed vlan 2-99,101-1001  
  switchport mode trunk  
!  
interface GigabitEthernet7/1  
  description Trunk Ports  
  switchport trunk allowed vlan 2-99,101-1001  
  switchport mode trunk  
!  
interface GigabitEthernet8/1  
  description Trunk Ports  
  switchport trunk allowed vlan 2-99,101-1001  
  switchport mode trunk  
!  
interface GigabitEthernet9/1  
  description Trunk Ports  
  switchport trunk allowed vlan 2-99,101-1001  
  switchport mode trunk  
!  
interface Vlan1  
  no ip address  
  shutdown  
!  
interface Vlan100  
  ip address 172.21.1.10 255.255.255.0  
!  
interface Vlan200  
  ip address 172.21.2.10 255.255.255.0  
!  
ip default-gateway 172.21.1.1  
.
```

Floor1-Access

Floor1-Access

Physical Config CLI Attributes

IOS Command Line Interface

```
interface GigabitEthernet8/1
description Uplink Trunks
switchport trunk allowed vlan 2-99,101-1001
switchport mode trunk
!
interface GigabitEthernet9/1
description Uplink Trunks
switchport trunk allowed vlan 2-99,101-1001
switchport mode trunk
!
interface Vlan1
no ip address
shutdown
!
interface Vlan100
ip address 172.21.1.11 255.255.255.0
!
interface Vlan200
ip address 172.21.2.11 255.255.255.0
!
ip default-gateway 172.21.1.1
!
```

Floor2-Access

Floor2-Access

Physical Config CLI Attributes

IOS Command Line Interface

```
!
interface GigabitEthernet8/1
description Uplink Trunks
switchport trunk allowed vlan 2-99,101-1001
switchport mode trunk
!
interface GigabitEthernet9/1
description Uplink Trunks
switchport trunk allowed vlan 2-99,101-1001
switchport mode trunk
!
interface Vlan1
no ip address
shutdown
!
interface Vlan100
ip address 172.21.1.12 255.255.255.0
!
interface Vlan200
ip address 172.21.2.12 255.255.255.0
!
ip default-gateway 172.21.1.1
```

Floor-3Access

Floor3-Access

Physical Config CLI Attributes

IOS Command Line Interface

```
interface GigabitEthernet8/1
  description Trunk to NOC and Floor4
  switchport trunk allowed vlan 2-99,101-1001
  switchport mode trunk
!
interface GigabitEthernet9/1
  description Trunk to NOC and Floor4
  switchport trunk allowed vlan 2-99,101-1001
  switchport mode trunk
!
interface Vlan1
  no ip address
  shutdown
!
interface Vlan100
  ip address 172.21.1.13 255.255.255.0
!
interface Vlan200
  ip address 172.21.2.13 255.255.255.0
!
ip default-gateway 172.21.1.1
,
```

Floor4-Access

Floor4-Access

Physical Config CLI Attributes

IOS Command Line

```
!  
interface GigabitEthernet8/1  
  description Trunk to NOC and Floor3  
  switchport mode trunk  
!  
interface GigabitEthernet9/1  
  description Trunk to NOC and Floor3  
  switchport trunk allowed vlan 2-99,101-1001  
  switchport mode trunk  
!  
interface Vlan1  
  no ip address  
  shutdown  
!  
interface Vlan100  
  ip address 172.21.1.14 255.255.255.0  
!  
interface Vlan200  
  ip address 172.21.2.14 255.255.255.0  
!  
ip default-gateway 172.21.1.1  
!
```