

Criteria #1 – Static IP & Connectivity

Static IP

Servers:

IPv4: ZDSrv1-JAAB

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.17763.737]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\Administrator>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : ZDSrv1-JAAB
    Primary Dns Suffix . . . . . : zeroday.local
    Node Type . . . . . : Hybrid
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No
    DNS Suffix Search List. . . . . : zeroday.local

Ethernet adapter Ethernet0:

    Connection-specific DNS Suffix . : 
    Description . . . . . : Intel(R) 82574L Gigabit Network Connection
    Physical Address. . . . . : 00-0C-29-24-FA-DE
    DHCP Enabled. . . . . : No
    Autoconfiguration Enabled . . . . : Yes
    IPv4 Address. . . . . : 192.168.10.10(Preferred)
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.10.1
    DNS Servers . . . . . : 127.0.0.1
    NetBIOS over Tcpip. . . . . : Enabled

C:\Users\Administrator>
```

IPv4: ZDSrv2-JAAB

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.17763.737]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\Administrator.ZERODAY>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : ZDSrv2-JAAB
    Primary Dns Suffix . . . . . : zeroday.local
    Node Type . . . . . : Hybrid
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No
    DNS Suffix Search List. . . . . : zeroday.local

Ethernet adapter Ethernet0:

    Connection-specific DNS Suffix . : 
    Description . . . . . : Intel(R) 82574L Gigabit Network Connection
    Physical Address. . . . . : 00-0C-29-4F-84-A9
    DHCP Enabled. . . . . : No
    Autoconfiguration Enabled . . . . : Yes
    IPv4 Address. . . . . : 192.168.10.15(Preferred)
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.10.1
    DNS Servers . . . . . : 192.168.10.10
                           127.0.0.1
    NetBIOS over Tcpip. . . . . : Enabled

C:\Users\Administrator.ZERODAY>
```

IPv4: ZDDMZ-JAAB

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.17763.737]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\Administrator>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : ZDDMZ1-JAAB
    Primary Dns Suffix . . . . . : zeroday.local
    Node Type . . . . . : Hybrid
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No
    DNS Suffix Search List. . . . . : zeroday.local

Ethernet adapter Ethernet0:

    Connection-specific DNS Suffix . : 
    Description . . . . . : Intel(R) 82574L Gigabit Network Connection
    Physical Address. . . . . : 00-0C-29-5C-12-08
    DHCP Enabled. . . . . : No
    Autoconfiguration Enabled . . . . : Yes
    IPv4 Address. . . . . : 192.168.10.30(Preferred)
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.10.1
    DNS Servers . . . . . : 192.168.10.10
    NetBIOS over Tcpip. . . . . : Enabled

C:\Users\Administrator>
```

Client:

IPv4: ZDClient

```
Command Prompt
(c) Microsoft Corporation. All rights reserved.

C:\Users\ZDClient1>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : ZDClient
    Primary Dns Suffix . . . . . : zeroday.local
    Node Type . . . . . : Hybrid
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No
    DNS Suffix Search List. . . . . : zeroday.local

Ethernet adapter Ethernet0:

    Connection-specific DNS Suffix . : 
    Description . . . . . : Intel(R) 82574L Gigabit Network Connection
    Physical Address. . . . . : 00-0C-29-E9-82-59
    DHCP Enabled. . . . . : No
    Autoconfiguration Enabled . . . . : Yes
    Link-local IPv6 Address . . . . . : fe80::5021:a46d:7688:f9e0%13(Preferred)
    IPv4 Address. . . . . : 192.168.10.50(Preferred)
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.10.1
    DHCPv6 IAID . . . . . : 100666409
    DHCPv6 Client DUID. . . . . : 00-01-00-01-2F-FF-55-D1-00-0C-29-E9-82-59
    DNS Servers . . . . . : 192.168.10.10
    NetBIOS over Tcpip. . . . . : Enabled

C:\Users\ZDClient1>
```

Connectivity

Servers:

IPv4: ZDSrv1-JAAB - IPv4: ZDSrv2-JAAB and IPv4: ZDDMZ-JAAB

```
Administrator: Command Prompt
C:\Users\Administrator>ping 192.168.10.15

Pinging 192.168.10.15 with 32 bytes of data:
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.15:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\Administrator>ping 192.168.10.30

Pinging 192.168.10.30 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.10.30:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Users\Administrator>ping 192.168.10.30
```

IPv4: ZDSrv2-JAAB - IPv4: ZDSrv1-JAAB and IPv4: ZDDMZ-JAAB

```
Administrator: Command Prompt
C:\Users\Administrator.ZERODAY>ping 192.168.10.10

Pinging 192.168.10.10 with 32 bytes of data:
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\Administrator.ZERODAY>ping 192.168.10.30

Pinging 192.168.10.30 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.10.30:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Users\Administrator.ZERODAY>
```

IPv4: ZDDMZ-JAAB - IPv4: ZDSrv1-JAAB and IPv4: ZDSrv2-JAAB

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.17763.737]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\Administrator>ping 192.168.10.10

Pinging 192.168.10.10 with 32 bytes of data:
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\Administrator>ping 192.168.10.15

Pinging 192.168.10.15 with 32 bytes of data:
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.15:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\Administrator>
```

Client:

IPv4: ZDClient

CA. Command Prompt

```
C:\Users\ZDClient1>ping 192.168.10.10
```

```
Pinging 192.168.10.10 with 32 bytes of data:
```

```
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.10.10:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\Users\ZDClient1>ping 192.168.10.15
```

```
Pinging 192.168.10.15 with 32 bytes of data:
```

```
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.10.15: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.10.15:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\Users\ZDClient1>ping 192.168.10.30
```

```
Pinging 192.168.10.30 with 32 bytes of data:
```

```
Request timed out.
```

```
Request timed out.
```

```
Request timed out.
```

```
Request timed out.
```


```
Ping statistics for 192.168.10.30:
```

```
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\Users\ZDClient1>_
```

Criteria #2 – AD Users, Groups, and OUs

1. Organization Units

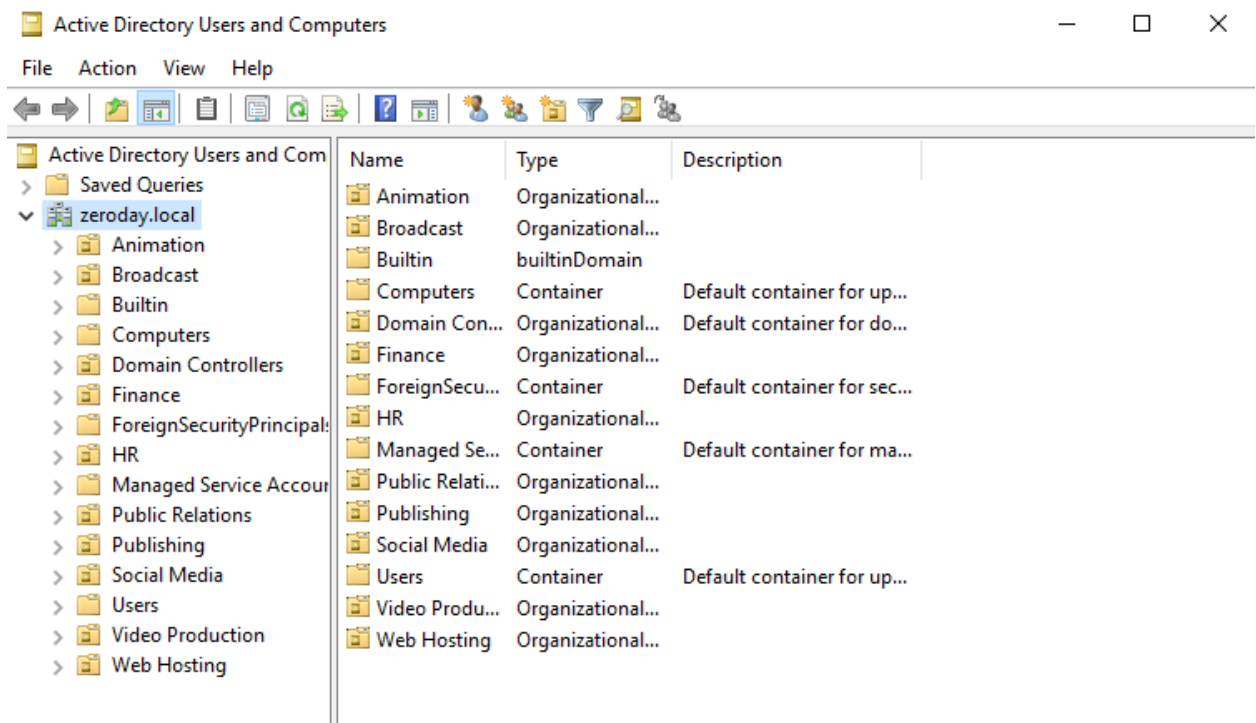

2. Group Members

Active Directory Users and Computers

File Action View Help

← → [Icons]

Saved Queries
zeroday.local

- Animation
 - Henry Lane
 - Isabella Ramos
 - Oliver Morris
 - Zoe Nightshade
- Broadcast
 - Carlos Nguyen
 - James Coleman
 - Mia Thompson
 - Nina Jones
- Builtin
- Computers
- Domain Controllers
- Finance
 - Ahsley Patel
 - Dainel Moore
 - Kevin Brooks
 - Rebecca Clark
- ForeignSecurityPrincipal
- HR
 - Brandon Lee
 - Lisa Martinez
 - Steven King
 - Victoria Golden
- Managed Service Accounts
- Public Relations
 - Alyssa Green
 - David Ross
 - Lauren Cho
 - Marco Fernandez

- Publishing
 - aaron foster
 - Michael Kim
 - Rachel Bennett
 - Susan Baker
- Social Media
 - Brian Owens
 - Emma Scott
 - Tyler Hughes
 - Vanessa Liu
- Users
- Video Production
 - Chloe Anderson
 - Ethan Nakamura
 - Luke Evans
 - Madison Gold
- Web Hosting
 - Grace Kelly
 - Jacob Hall
 - Leo Thomas
 - Samantha Ward

Criteria #3 – GPO: Domain Password Policy

Account Policies/Password Policy	
Policy	Setting
Enforce password history	0 passwords remembered

blank

7/10/2025

t Domain Policy


Page 2 of 2

Maximum password age	30 days
Minimum password age	1 days
Minimum password length	10 characters
Password must meet complexity requirements	Enabled
Store passwords using reversible encryption	Disabled

Account Policies/Account Lockout Policy	
Policy	Setting
Account lockout duration	30 minutes
Account lockout threshold	3 invalid logon attempts
Reset account lockout counter after	30 minutes


Account Policies/Kerberos Policy	
----------------------------------	--

Criteria #4 – DNS Forward & Reverse Zones

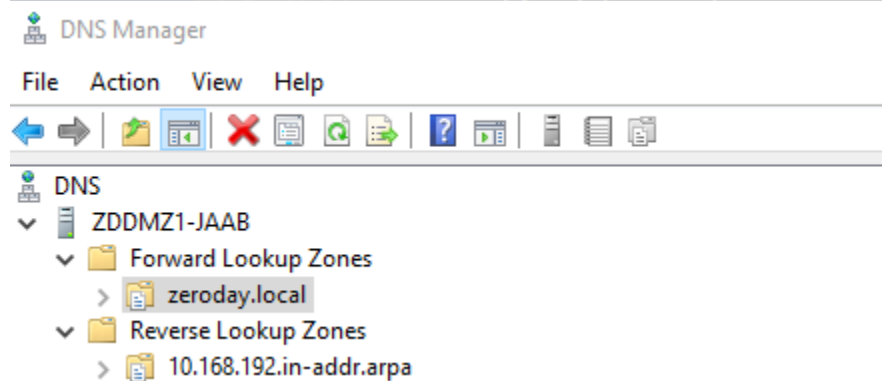


Criteria #7 – Fault Tolerance: Two Domain Controllers

ZDSRV1-JAAB

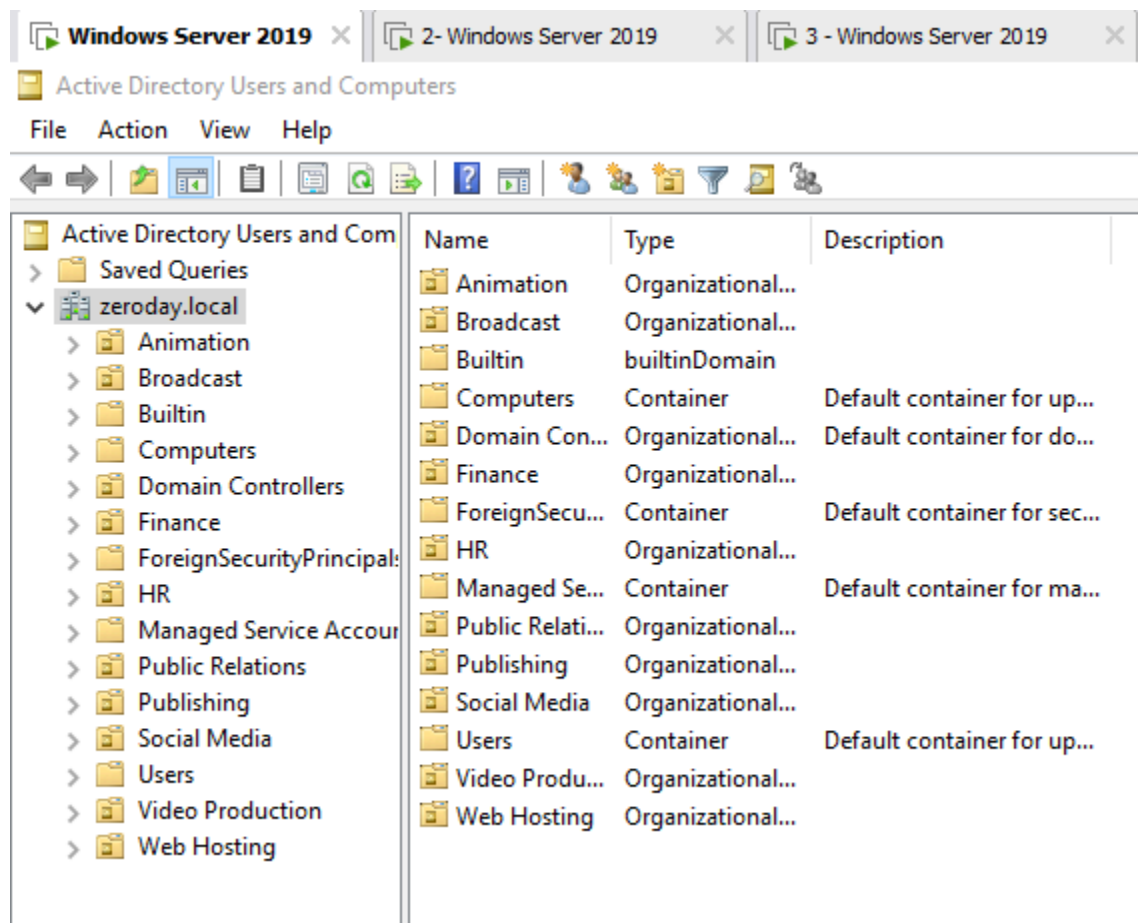


ZDSRV2-JAAB

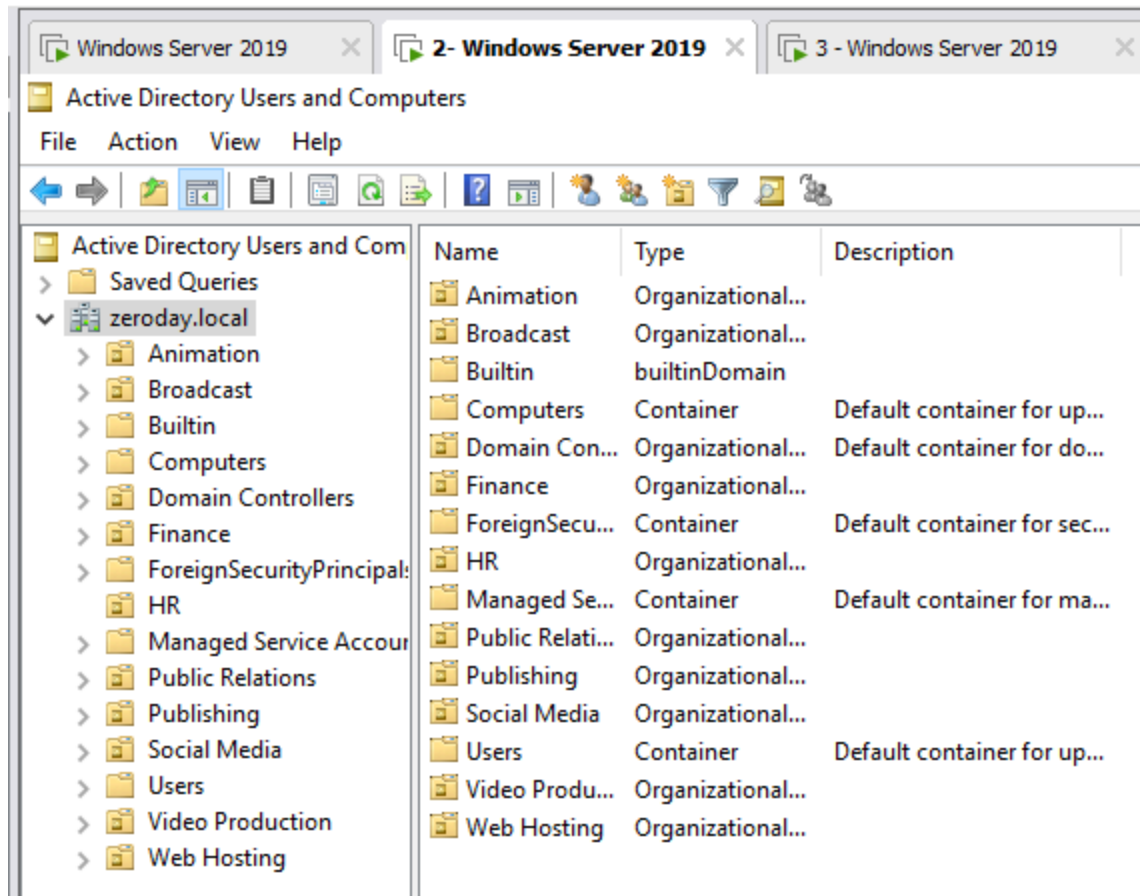

Criteria #8 – DNS Zone Transfer (Master & Secondary)

On ZDSrv1-JAAB (Master DNS):

Forward Lookup Zone → Properties → Zone Transfers tab with 192.168.10.30 listed

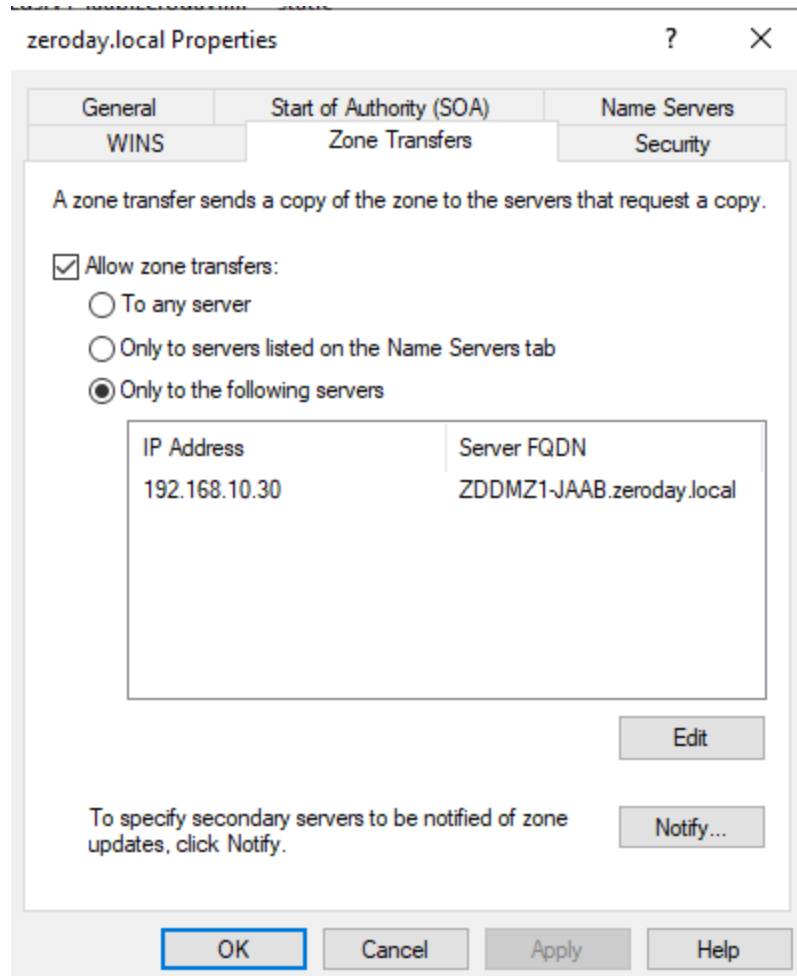

On ZDSrv1-JAAB:

Reverse Zone → Properties → Zone Transfers tab

10.168.192.in-addr.arpa Properties

General

Start of Authority (SOA)

Name Servers

WINS-R

Zone Transfers

Security

A zone transfer sends a copy of the zone to the servers that request a copy.

☒ Allow zone transfers:

☐ To any server

☐ Only to servers listed on the Name Servers tab

☒ Only to the following servers

IP Address	Server FQDN
192.168.10.30	ZDDMZ1-JAAB.zeroday.local

Edit

To specify secondary servers to be notified of zone updates, click Notify.

Notify...

OK

Cancel

Apply

Help

On ZDDMZ-JAAB:

DNS Manager showing zeroday.local (Secondary)

Name	Type	Status	DNSSEC Status	Key Master
 zeroday.local	Secondary	Running		

On ZDDMZ-JAAB:

Reverse Zone (Secondary)

Name	Type	Status	DNSSEC Status	Key Master
 10.168.192.in-addr.arpa	Secondary	Running		