






7.4 USB Bus Powered with 3.3V / 5V Supply and Logic Drive / IO Supply Voltage

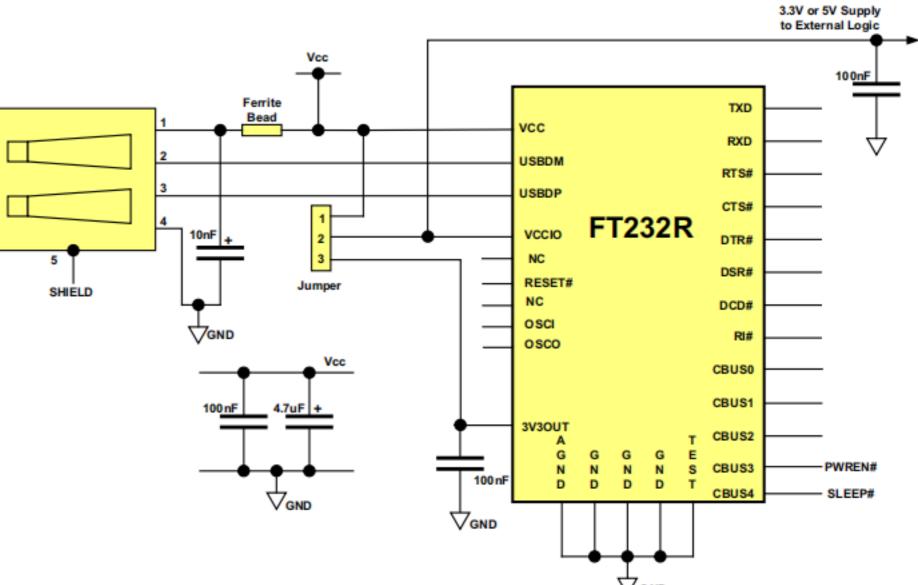

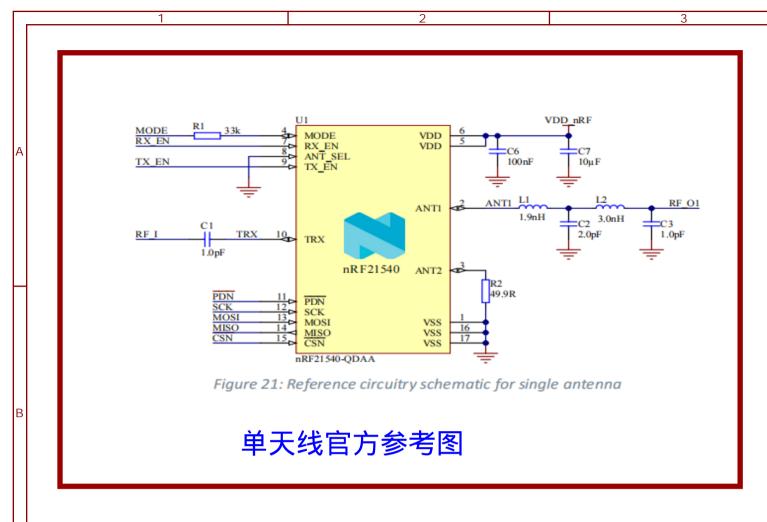

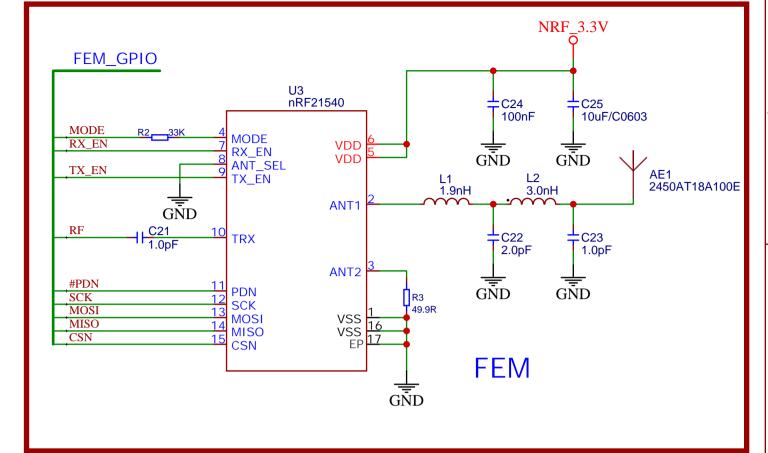

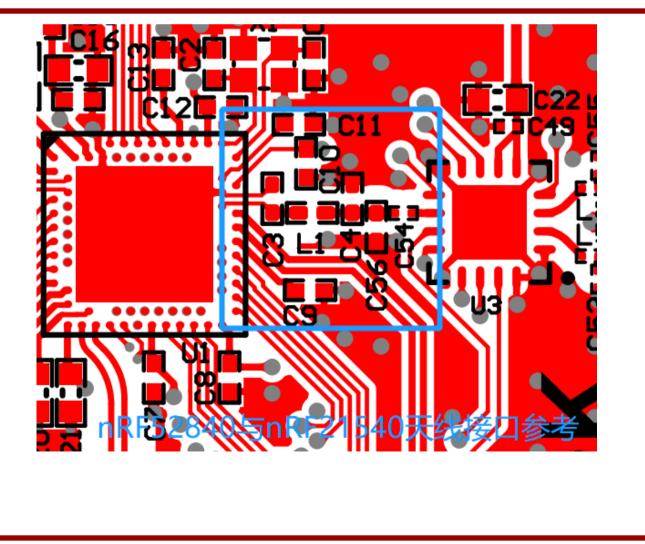

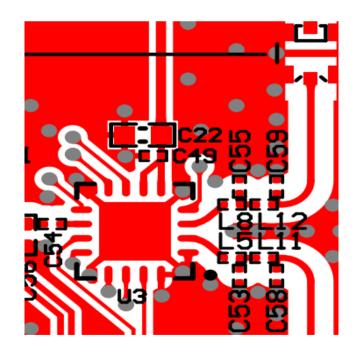

双天线官方PCB Layout参考图

除去天线本身外 4层走线含天线 引线全部覆GND

官方4层线宽0.279

嘉立创7628版型计算——0.3493 4层

4层 内层铜厚0.5oz 外层铜厚1oz

TITLE:
Sheet_1
REV: 1.0

⇔嘉立创EDA

Company: Your Company

Sheet: 1/1

Date: 2023-01-12 Drawn By: woshinamo