


EXPERIMENT-9

Implementation of SUBNETTING in CISCO PACKET TRACER simulator.

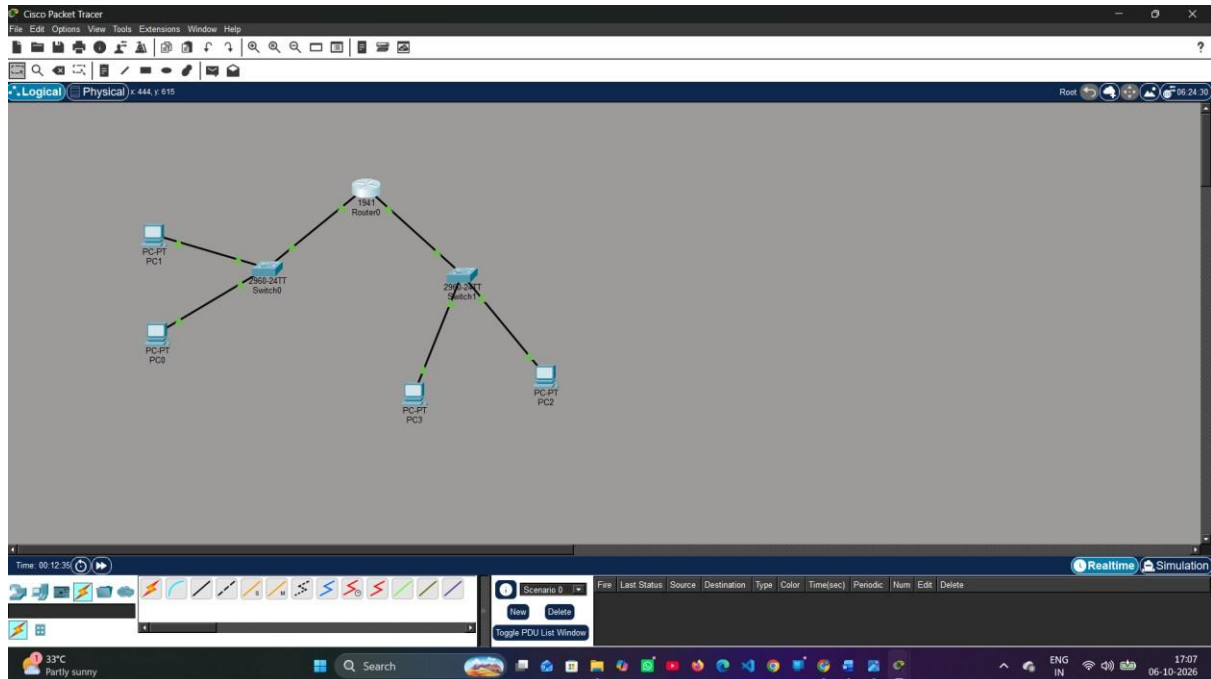

```
Router0
Physical Config CLI Attributes
CLI
*450168 bytes of ATA System CompactFlash 0 (Read/Write)
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: NO
Press RETURN to get started!

Router>configure terminal
% Invalid input detected at '' marker.
Router>interface gigabitEthernet 0/0
% Invalid input detected at '' marker.
Router>ip address 192.168.1.1 255.255.255.0
% Invalid input detected at '' marker.
Router>no shutdown
Translating "no"...domain server (255.255.255.255)
Router>enable
Router>
% Unknown command or computer name, or unable to find computer address
Router>configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
Router(config)#interface gigabitEthernet 0/1
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Router(config)#exit
Router>
*SYS-5-CONFIG_1: Configured from console by console
```

