


EXPERIMENT-9

Implementation of SUBNETTING in CISCO PACKET TRACER simulator.

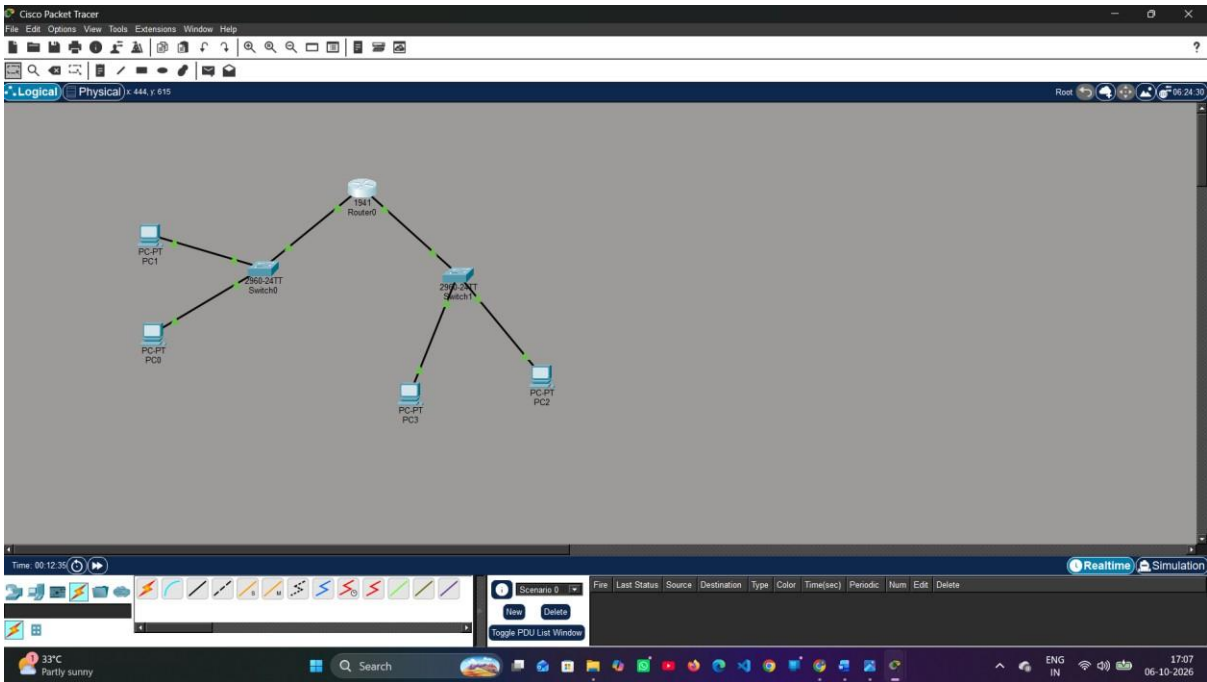


```
Router0
Physical  Config  CLI  Attributes

--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: NO

Press RETURN to get started!

Router>configure terminal
^
% Invalid input detected at '^' marker.
Router>interface gigabitEthernet 0/0
^
% Invalid input detected at '^' marker.
Router>ip address 192.168.1.1 255.255.255.0
^
% Invalid input detected at '^' marker.
Router>no shutdown
Translating "no"...domain server (255.255.255.255)
Router>enable
Router>
% Unknown command or computer name, or unable to find computer address
Router>configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-3-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
Router(config)#interface gigabitEthernet 0/1
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-3-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Router(config)#exit
Router>
!SYS-5-CONFIG_1: Configured from console by console
```

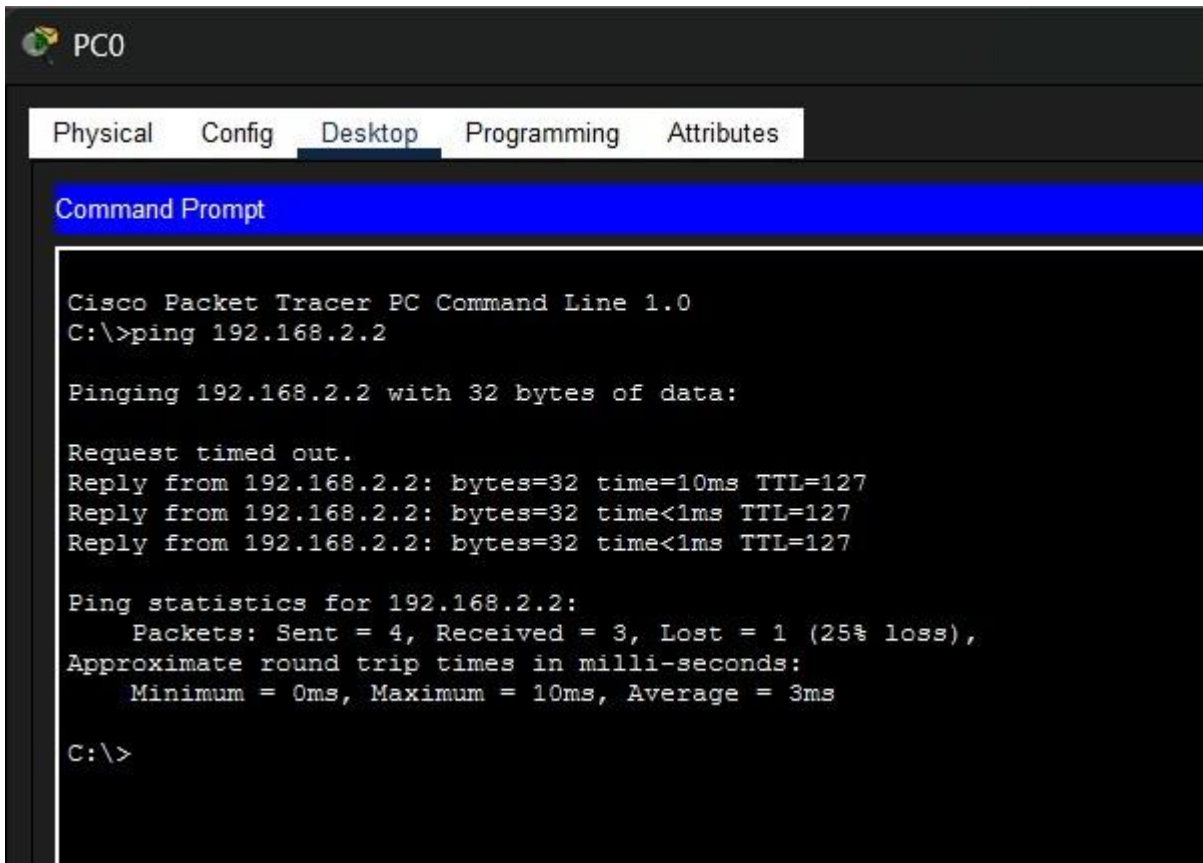

The screenshot shows a PC0 interface in Cisco Packet Tracer. The 'Desktop' tab is selected, displaying a 'Command Prompt' window. The window title is 'Cisco Packet Tracer PC Command Line 1.0'. The user has entered the command 'C:\>ping 192.168.2.2'. The output shows a successful ping with 32 bytes of data. The first attempt timed out, while the subsequent three attempts were successful with response times of 10ms, <1ms, and <1ms respectively. The ping statistics for 192.168.2.2 are displayed, showing 4 packets sent, 3 received, and 1 lost (25% loss). The approximate round trip times in milliseconds are also shown: Minimum = 0ms, Maximum = 10ms, and Average = 3ms. The prompt 'C:\>' is visible at the bottom of the window.

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.2: bytes=32 time=10ms TTL=127
Reply from 192.168.2.2: bytes=32 time<1ms TTL=127
Reply from 192.168.2.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 3ms

C:\>
```