


EXPERIMENT-10

Internetworking with routers in CISCO PACKET TRACER simulator.

a) Design and configure a simple internetwork using a router

1. Design different networks (with 3 to 4 hosts) and connect via Router.
2. Allot static ip address to machines and router interfaces.
3. Perform simulation and trace how routing is done in packet transmission.

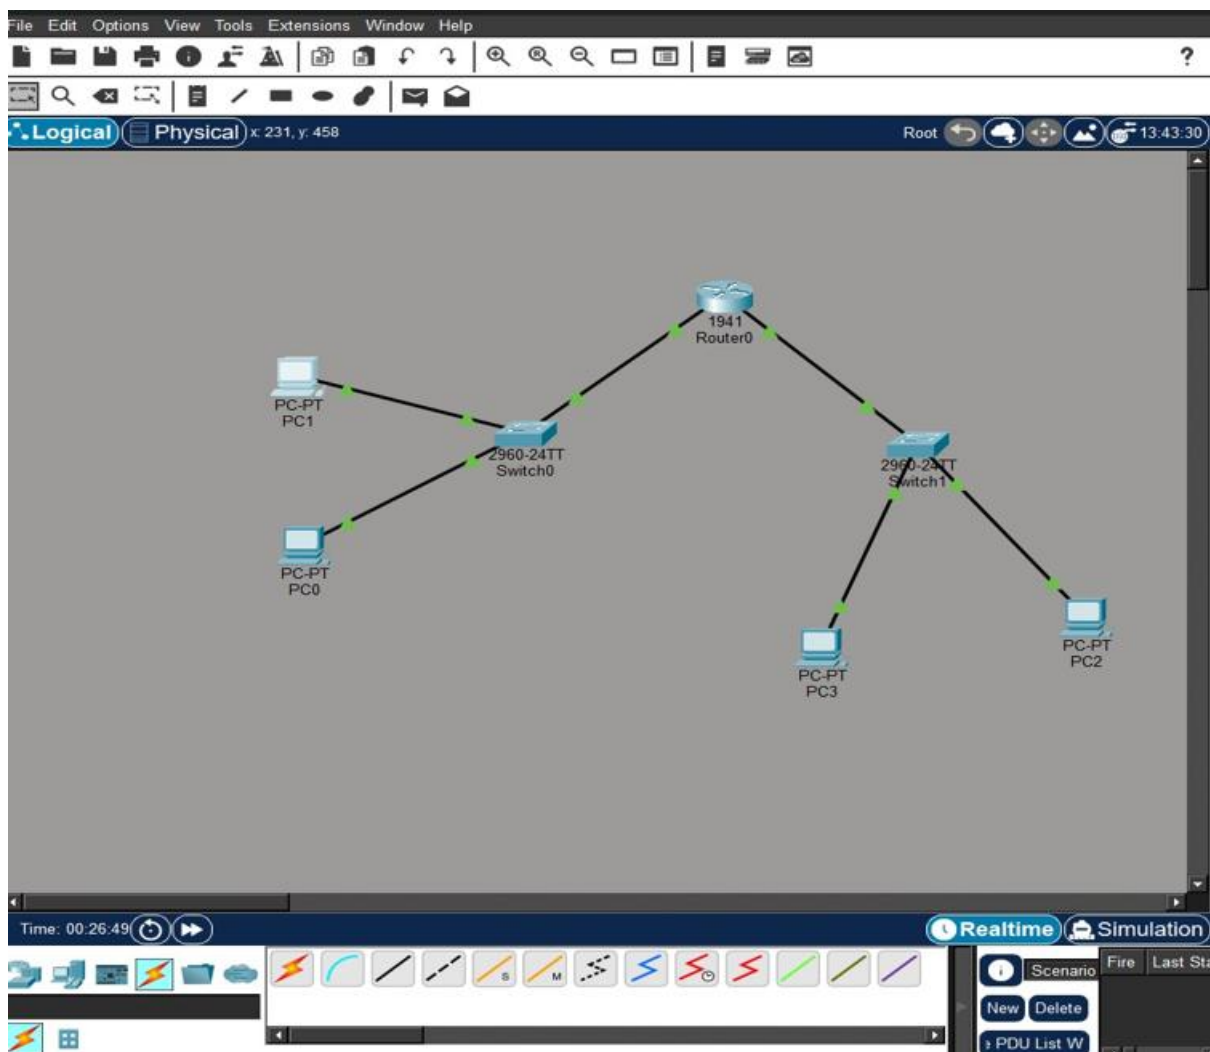

EXPERIMENT-10

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface gigabitEthernet 0/1
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#end
```

Copy

Paste

PC1

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:


Request timed out.
Reply from 192.168.2.3: bytes=32 time=1ms TTL=127
Reply from 192.168.2.3: bytes=32 time<1ms TTL=127
Reply from 192.168.2.3: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

EXPERIMENT-10

b) Design and configure an internetwork using wireless router DHCP server and internet cloud.

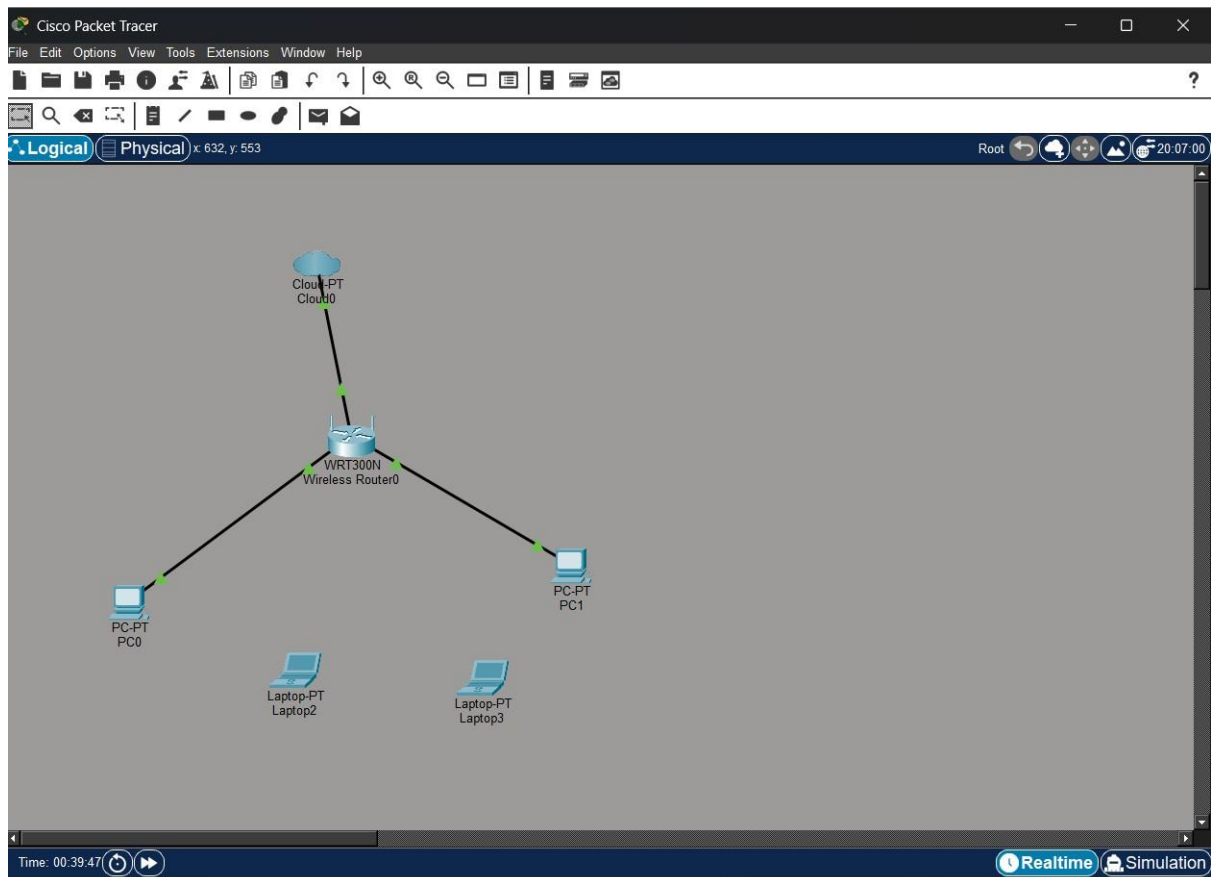

EXPERIMENT-10

c) Design and configure an inter-network in your lab using switch, router and Ethernet cables.

