Physics Internal Assessment

Session: May 2025

The Relationship between the internal pressure and Coefficient of restitution of a Volleyball

Word count: 2983

Table of Contents

1. Research Design	3
1.1 Introduction	3
1.2 Research question	4
1.3 Background information	4
1.4 Hypothesis	6
1.5 Variables	6
1.6 Materials	9
1.7 Methodology	10
1.8 Risk assessment	11
2. Analysis	12
2.1 Data collection	12
2.1.1 Qualitative data	12
2.1.2 Quantitative data	13
2.2 Data Processing	15
2.3 Data Visualization	19
2.4 Data Analysis	21
3. Conclusion	29
4. Evaluation	30
5. Bibliography	33
6. Appendices	35

1. Research Design

1.1 Introduction

With all the 48¹ Sports in the Olympics there are Factors that can affect the athlete's performance in their sport for example but not limited to the athletes physical Fitness through training and nutrition, Weather conditions, Event Schedule & Equipment. Those Factors can be classified under two main Categories, modifiable Factors, where athletes have control over it and fixed Factors, where athletes' influence is limited.

Depending on the Sport, each factor that influences the athlete's performance is interchangeable under those two categories. For example, in golf, instead of players using a standard golf club, they can customize it to their preferences. In Volleyball, on the other hand, Field Size, Net height, Internal Pressure and Size of the Ball cannot be adjusted to the players' liking but are rather standardized according to the FIVB² regulations.

For me, personally was the most exciting factor of all, the Volleyball internal pressure. The Volleyball internal pressure is very important because it changes the elasticity of the Volleyball, which affect its bounce height, rebound height, grip & speed, which are crucial Factors for any Volleyball player.

Hence, I wanted to test and observe the Relation between the internal pressure and the elasticity of a Volleyball at six consecutive bounces.

¹ AKABAS, Lev. How summer Olympic sports have changed over time: Data viz. Sportico.com [online]. 23 July 2024. [Accessed 16 December 2024]. Available from: https://www.sportico.com/leagues/olympics/2024/new-olympic-sports-2024-paris-1234775913/

² Official Volleyball Rules 2021-2024 [online]. [Accessed 16 December 2024]. Available from: https://www.fivb.com/wp-content/uploads/2024/03/FIVB-Volleyball Rules 2021 2024 pe.pdf

1.2 Research question

How does varying the internal pressure of a Volleyball in the following increments (6.500 psi, 5.500 psi, 4.500 psi, 3.500 psi, 2.500 psi, 2.000 psi) (\pm 0.001 psi) affect its coefficient of restitution after each bounce throughout six consecutive bounces released from a fixed horizontal displacement of 1.700 m (\pm 0.001 m).

1.3 Background information

The ball moves through three phases. In the first phase, it starts with gravitational potential energy (GPE), which is converted into kinetic energy (KE) as it falls. In the second phase, upon collision, KE transforms into elastic potential energy (EPE), with some energy lost as heat and sound. In the third phase, the ball rebounds as EPE converts back into KE and then into GPE, but with reduced total energy due to energy losses.

The Coefficient of restitution is the ratio of the velocity components along the normal plane of contact after and before the collision.

$$e = \frac{v_{final}}{v_{initial}} \tag{1}$$

Where:

e = coefficient of restitution (Unitless)

v_{final/initial} = Velocity of the Object (ms⁻¹)

3 types of elasticity are conducted from the coefficient of restitution, the perfectly inelastic collisions, where the coefficient of restitution equals to 0 & the KE is lost, the perfectly elastic collisions where the coefficient of restitution equals to 1 and no KE is lost, the inelastic collisions, where the coefficient of restitution is between 0 & 1.

The Kinetic and the Gravitational potential energy are connected through this equation according to the law of conservation of energy:

 $gravitational\ potential\ energy = Kinetic\ Energy$

$$mgh = \frac{1}{2}mv^2 \tag{2}$$

The following equation may be rearranged for the velocity:

$$v = \sqrt{2gh} \tag{3}$$

Since the coefficient of restitution is based on the velocity at two points, the coefficient of restitution equation could be written as follows:

$$e = \frac{v_{final}}{v_{initial}} \tag{4}$$

$$e = \frac{\sqrt{2gh_{final}}}{\sqrt{2gh_{initial}}} \tag{5}$$

Hence, the coefficient of restitution is described as the square root of the final height reached by the object divided by the initial height of the object:

$$e = \sqrt{\frac{h_{final}}{h_{initial}}} \tag{6}$$

Where:

e = coefficient of restitution (Unitless)

h_{final/initial} = height of the Object (m)

1.4 Hypothesis

Through the information presented in the Background information section it is hypothesized that as the internal pressure of a Volleyball increases, the coefficient of restitution (COR) will also increase until a certain point, where the changes in Pressure will not be as effective on the COR. Thus, the Relationship between the COR and the Pressure is hypothesized to be a non-linear relationship. This hypothesis is supported by the understanding of how pressure affects the elasticity and deformation of the volleyball, which affects its rebound height thus results the COR to be also effected. As mentioned before in the Background information section, that at a certain pressure the ball will resist being deformed, thus result in a loss of less energy. This happens due to the physics of material deformation and the way pressure influences the ball's behavior during and after impact with the ground.

NOTE: This Experiment was conducted assuming that the air resistance is negligible.

1.5 Variables

follows: gauge (± 0.001 psi) based Independent Internal (6.500 psi, 5.500 psi, 4.500 psi,		Manipulated and measured variables									
volleyball that will be changed as follows: follows: gauge (± 0.001 psi) based Independent Internal (6.500 psi, 5.500 psi, 4.500 psi,	Variable		Explanation & Justification	Apparatus							
variable Pressure 3.500 psi, 2.500 psi, 1.500 psi) (± analog instrument and hun 0.001 psi) ensuring the variety error in readings)			volleyball that will be changed as follows: (6.500 psi, 5.500 psi, 4.500 psi, 3.500 psi, 2.500 psi, 1.500 psi) (± 0.001 psi) ensuring the variety	Volleyball pump with a Pressure gauge (± 0.001 psi) based on the smallest increment in the analog instrument and human error in readings)							

Manipulated and measured variables									
Variable		Explanation & Justification		Apparatus					
Dependent variable	Coefficient of restitution	The Rebound height of the volleyball over six consecutive bounces is being used to calculate the coefficient of restitution	•	analysis due to the p					

Table 1: Independent and dependent Variable

The range of values were chosen to have values above the standard game pressure (4.3-4.6 psi) and below the standard game pressure to provide an insight on how the COR changes throughout the variations. Choosing a higher Pressure than the maximum (6.500 \pm 0.001 psi) will result in the balls inconsistency and a potential risk of structural deformation. Choosing Pressures lower than (1.500 \pm 0.001 psi) will result in the ball not completing the 6 bounces, hence not complying with the other pressure variations.

Controlled Variables								
Variable	Significance	Methods of control						
Type of Volleyball	The material/surface of the volleyball affects its elasticity and reaction with the surface as well.	Using the same volleyball for all trials.						
Drop height	Ensures consistent GPE and KE for each trial, which affects the volleyball's rebound height.	Releasing the ball from a fixed height throughout the trials. (1.700 \pm 0.001 m due to error in measurements).						

Controlled Variables								
Variable	Significance	Methods of control						
	Inconsistency on the surface	Conducting the experiment on						
Surface of impact	could affect the energy loss	concrete, a flat and hard						
	during each collision.	surface across all trials.						
	The elasticity of a material	Conducting the trials in an						
Temperature	depends on the Temperature.	indoor environment where the						
	depends on the remperature.	humidity & temperature						
		difference is minimized across						
		all trials.						
	Humidity affects the material's	(T = 22.0 °C ± 0.1 °C)						
Humidity	properties which changes its	(Uncertainty due to the smallest						
	elasticity.	detection of the thermometer						
		used to measure the room						
		temperature).						
		Inflating the Volleyball with						
	The change in the type of gas	standard air composition						
Air composition	used affects its elasticity and	across trials.						
	pressure.	(≈ 78% nitrogen,						
		≈ 21% oxygen)						
	Interruption between bounces							
Dayman annuanan timbir u	could affect measurements due	Allowing Volleyball to complete						
Bounce sequence timing	to the volleyball's reforming into	all bounces in one trial.						
	original shape.							
	Table 2: Controlled Variables							

Table 2: Controlled Variables

Uncontrolled Variables						
Variable	Significance					
Environmental factors	Minor air current changes, vibrations & external					
Environmental factors	noise can affect volleyball's rebound height.					
Motorial aging	Repeated trials slightly change Volleyball's					
Material aging	elasticity, which impacts the results over time.					
Surface imperfections	Uneven surfaces could cause slight deviations in					
Surface imperfections	rebound height.					

Table 3: Uncontrolled Variables

1.6 Materials

- 1. Mikasa V330W Volleyball (Diameter 20.7 21.3 cm | Weight 260 280 g)
- 2. Pressure Gauge (± 0.001 psi)
- 3. Electric / Manual air pump
- 4. 1 meter of Sewing Measuring tape (\pm 0.005 meter (based on half the smallest increment))
- 5. Paper
- 6. Marker
- 7. Scissors
- 8. Smartphone or Camera
- 9. Tripod
- 10. Tape
- 11. Flat, Hard Surface
- 12. Video analysis software "Tracker"³
- 13. Laptop

³ http://physlets.org/tracker

1.7 Methodology

- Attach the Sewing measuring tape vertically against a flat wall with the tape.
- 2. Cut the Paper into two big pieces.
- 3. Mark the Papers with 1- & 1.7-meter with the marker
- Attach the markers to the wall with the height of the marker.
- 5. Cut another paper into fifteen slim pieces.
- Attach the fifteen slim pieces to the wall with a 10 cm gap.
- 7. Inflate the Volleyball fully.
- Connect the Volleyball to the pressure gauge and adjust the internal pressure to the required level
- Setup the smartphone on the tripod perpendicular to the wall

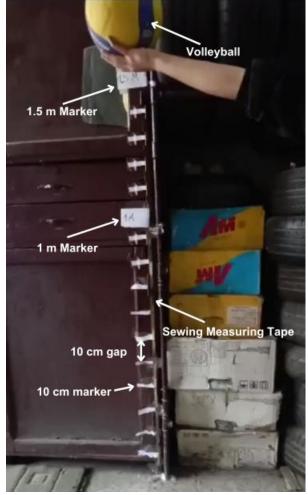


Figure 1: Image of the Experiment (Image self-taken and self-labelled using canva)

- 10. Setup the smartphone into Video mode
- 11. Release the Volleyball from the 1.7-meter mark (measured from the bottom of the ball) and start recording the first 6 consecutive bounces.
- 12. Insert the Videos into "Tracker"
- 13. Add & adjust the Coordinate axes to align with the floor and the wall from the tool's menu.
- 14. Add a 1.7-meter calibration stick from the menu and adjust it with the Coordinate axes, the floor, and the wall.
- 15. Track the Volleyball through each frame and the data will be shown automatically to the right of the screen through a table and an x & y-coordinate.

16. Repeat Point 7-15 for the 6 different pressures and for 5 trials.

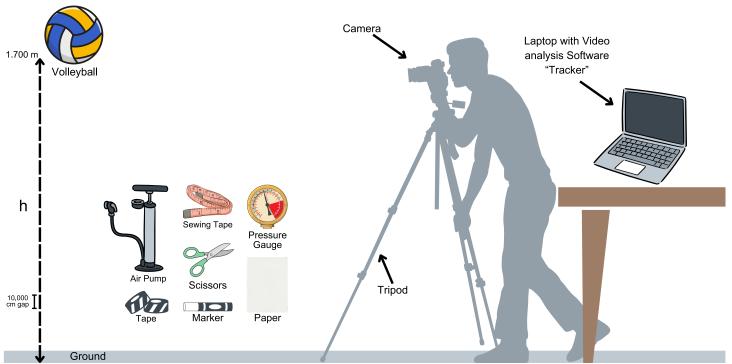


Figure 2: Experimental setup with tools used (self-designed using Canva)

1.8 Risk assessment

Consideration Type	Significance
Safety Considerations	Safety considerations were taken through ensuring the volleyball is inflated to a safe pressure range to prevent over-inflation and the volleyball's burst, which will increase the risk of injury from the flying fragments. Handling also the air pump carefully to avoid any release of air that could cause an injury.
Ethical	The experiment does not involve ethical considerations as there was no
Considerations	animal use and the data was not collected from human participants.
Environmental	While pumping Volleyball there were single-use pumps and gloves used to
Considerations	reduce waste and promote sustainability.

After the experiment, Volleyball was donated to a refugee camp for free to reduce waste by repurposing volleyball as sports equipment for the children. This minimizes the environmental impact.

Table 4: Risk assessment

2. Analysis

2.1 Data collection

2.1.1 Qualitative data

The results were plotted using the video analysis software "Tracker".

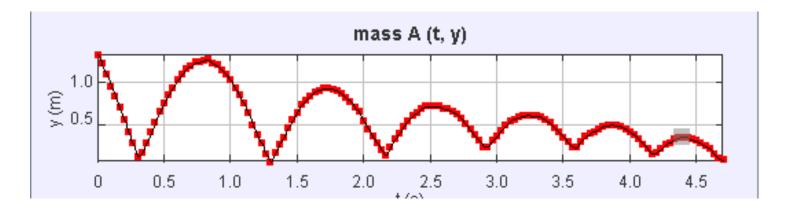


Figure 3: Data analysis (graph obtained using "Tracker") for trial 1 (5.2 PSI OR 35.85 kPa)

The graph shows the maximum height achieved of the Volleyball through six consecutive bounces. At the start of the graph the initial height of the Volleyball is pointed out (1.7 meters). The height of the volleyball decreases until hitting the ground. The Volleyball then goes upwards and reaches a new height which is the final height of the ball after the first bounce. This reaction is repeated until the ball reaches the sixth consecutive bounce or goes to rest.

2.1.2 Quantitative data

Table 5: Raw data tables of the Experiment in Six different pressures through 5 Trials

Pressure	Trial	Bounce 1	Bounce 2	Bounce 3	Bounce 4	Bounce 5	Bounce 6
in PSI		in m					
(±0.001		(±0.020)	(±0.020)	(±0.020)	(±0.020)	(±0.020)	(±0.020)
PSI)							
	1	1.520	1.320	1.140	0.980	0.830	0.700
	2	1.500	1.300	1.120	0.960	0.820	0.680
6.500	3	1.490	1.290	1.110	0.950	0.810	0.670
	4	1.530	1.330	1.150	0.990	0.840	0.710
	5	1.510	1.310	1.130	0.970	0.830	0.690
	1	1.430	1.240	1.070	0.920	0.780	0.650
	2	1.410	1.220	1.050	0.900	0.760	0.630
5.500	3	1.420	1.230	1.060	0.910	0.770	0.640
	4	1.440	1.250	1.080	0.930	0.790	0.660
	5	1.420	1.230	1.060	0.910	0.770	0.640
	1	1.320	1.140	0.980	0.840	0.710	0.590
	2	1.300	1.120	0.960	0.820	0.690	0.570
4.500	3	1.310	1.130	0.970	0.830	0.700	0.580
	4	1.330	1.150	0.990	0.850	0.720	0.600
	5	1.310	1.130	0.970	0.830	0.700	0.580
	1	1.180	1.020	0.870	0.740	0.620	0.510
	2	1.160	1.000	0.850	0.720	0.600	0.490
3.500	3	1.170	1.010	0.860	0.730	0.610	0.500
	4	1.190	1.030	0.880	0.750	0.630	0.520
	5	1.170	1.010	0.860	0.730	0.610	0.500

	1	1.000	0.860	0.730	0.620	0.520	0.430
	2	0.980	0.840	0.710	0.600	0.500	0.410
2.500	3	0.990	0.850	0.720	0.610	0.510	0.420
	4	1.010	0.870	0.740	0.630	0.530	0.440
	5	0.990	0.850	0.720	0.610	0.510	0.420
	1	0.810	0.700	0.590	0.500	0.420	0.350
	2	0.790	0.680	0.580	0.490	0.410	0.340
1.500	3	0.800	0.690	0.590	0.500	0.420	0.340
	4	0.820	0.710	0.600	0.510	0.430	0.360
	5	0.800	0.690	0.580	0.490	0.410	0.340

The uncertainty used in the Pressure columns are according to the pressure gauges smallest increment, which states that the uncertainty is = \pm 0.001 PSI.

The uncertainty used in the rebound height column is according to the human reading error of the height in "Tracker" the video analysis software.

2.2 Data Processing

The data acquired by the experiment was first processed by calculating the mean maximum height of each bounce through the 5 trials in the 6 different pressures. The mean maximum height was calculated through the sum of trial values divided by the number of trials which are 5 in each bounce.

$$\bar{h} = \frac{\sum_{i=1}^{n} h_i}{n} \tag{7}$$

Where:

 \bar{h} = the average height (meter)

 h_i = the height of in the *i*-th trial (meter)

n = number of trials (in this experiment = 5)

The average height of each bounce in each pressure will then be calculated into the derived formula acquired from the background information section of the Coefficient of restitution.

$$e = \sqrt{\frac{h_{final}}{h_{initial}}} \tag{8}$$

For bounce 1:

$$e = \sqrt{\frac{\bar{h}}{1.700}} \tag{9}$$

For Bounces from 2 to 6:

$$e_j = \sqrt{\frac{\bar{h}}{h_{j-1}}} \tag{10}$$

Where:

$$h_{j-1}=h_{initial}=\frac{\sum_{i=1}^n h_{i,j-1}}{n}$$

$$h_j = h_{final} = \frac{\sum_{i=1}^{n} h_{i,j}}{n}$$

Thus, this general formula is acquired for all Bounces.

$$e = \sqrt{\frac{\frac{\sum_{i=1}^{n} h_{i,j}}{n}}{\frac{1.700 \quad if \ j = 1}{\sum_{i=1}^{n} h_{i,j-1}} \quad if \ j \ge 2}}$$

$$(11)$$

		Pro	Example:				
Pressure	Bounce	Bounce	Bounce	Bounce	Bounce	Bounce	Calculating Bounce 1 Pressure
(PSI)	1 in m	2 in m	3 in m	4 in m	5 in m	6 in m	5.500 ± 0.001 psi using equation
(± 0.001)							7:
6.500	1.510	1.310	1.130	0.970	0.826	0.690	$\bar{h} = \frac{1.430 + 1.410 + \dots + 1.420}{5}$
5.500	1.424	1.234	1.064	0.914	0.774	0.644	<i>n</i> =
4.500	1.314	1.134	0.974	0.834	0.704	0.584	$\bar{h} = \frac{5}{\bar{h} = \frac{7.120}{5} = 1.424 m}$
3.500	1.174	1.014	0.864	0.734	0.614	0.504	$n = \frac{1.424 m}{5}$
2.500	0.994	0.854	0.724	0.614	0.514	0.424	
1.500	0.804	0.694	0.588	0.498	0.418	0.346	
Table 6:	Processed	mean heigh	t at Six diffe	rent pressure	es through 5	Trials	
		Abaala	Coloulating Pourse 1 Procesure				
_			ute Uncerta				Calculating Bounce 1 Pressure
Pressure	Bounce	Bounce	Bounce	Bounce	Bounce	Bounce	6.500 ± 0.001 psi using equation
(PSI)	1 in m	2 in m	3 in m	4 in m	5 in m	6 in m	12:
(±0.001)							$\triangle h = \frac{(1.530 - 1.490)}{2} = 0.020$
6.500	0.020	0.020	0.020	0.020	0.015	0.020	2n = 0.020
5.500	0.015	0.015	0.015	0.015	0.015	0.015	
4.500	0.015	0.015	0.015	0.015	0.015	0.015	
3.500	0.015	0.015	0.015	0.015	0.015	0.015	
2.500	0.015	0.015	0.015	0.015	0.015	0.015	
1.500	0.015	0.015	0.010	0.010	0.010	0.010	
	Table 7: F	Processed m	ean height A	Absolute Und	certainty		
l							

Fractional Uncertainty										
Pressure	Bounce	Bounce	Bounce	Bounce	Bounce	Bounce				
(PSI)	1 in m	2 in m	3 in m	4 in m	5 in m	6 in m				
(± 0.001)										
6.500	0.013	0.015	0.018	0.021	0.018	0.029				
5.500	0.011	0.012	0.014	0.016	0.019	0.023				
4.500	0.011	0.013	0.015	0.018	0.021	0.026				
3.500	0.013	0.015	0.017	0.020	0.024	0.030				
2.500	0.015	0.018	0.021	0.024	0.029	0.035				
1.500	0.019	0.022	0.017	0.020	0.024	0.029				
	T-1-1- 0. D		l : - l- 4 F							

Calculating Bounce 3 Pressure 3.500 \pm 0.001 psi using equation 13:

$$\frac{0.015}{0.884} = 0.017$$

Table 8: Processed mean height Fractional Uncertainty

Second, by processing the data, the rebound height's absolute uncertainty is calculated by subtracting the maximum height value with the minimum height value of the desired bounce & pressure and dividing it by 2.

$$\triangle h = \frac{(h_{max} - h_{min})}{2} \tag{12}$$

where:

 $\triangle h$ = Rebound height's absolute uncertainty (Unitless)

 $h_{max/min}$ = height (m)

Third, the Fractional/Relative uncertainty of the rebound height is based on its absolute uncertainty where the fractional uncertainty is the absolute uncertainty divided by the magnitude of the quantity.

$$\frac{\triangle h}{h} \tag{13}$$

In the calculations of the absolute and fractional uncertainty of the Coefficient of restitution the operation is more complicated, where the fractional uncertainty in the Coefficient of restitution is derived using the propagation of uncertainties for a square root⁴.

⁴ https://youtu.be/QR1qJX bEG8?si=0CllgdTjK7FRTk4F

Substituting $\frac{\Delta_e}{e}$ into the propagation of uncertainties as follows:

$$\frac{\triangle e}{e} = \frac{1}{2} \left(\frac{\triangle h_{final}}{h_{final}} + \frac{\triangle h_{initial}}{h_{initial}} \right) \tag{14}$$

Where:

 $\frac{\triangle e}{e}$ = Fractional uncertainty of the coefficient of restitution (Unitless)

By multiplying the Fractional uncertainty with the coefficient of restitution the absolute uncertainty of the coefficient of restitution is acquired.

$$\triangle e = (\frac{\triangle e}{\rho}) \cdot e \tag{15}$$

		Example:					
Pressure	Bounce	Bounce	Bounce	Bounce	Bounce	Bounce	Calculating Bounce 0-1
(PSI)	0-1	1-2	2-3	3-4	4-5	5-6	Pressure 6.500 <u>+</u> 0.001 psi
± 0.001							using equation 7:
6.500	0.942	0.931	0.929	0.926	0.923	0.914	7.550
5.500	0.915	0.931	0.929	0.927	0.920	0.912	$a = \frac{(-5)}{5} \approx 0.942 m$
4.500	0.879	0.929	0.927	0.925	0.919	0.911	$e = \frac{(\frac{7.536}{5})}{1.700} \approx 0.942 m$
3.500	0.831	0.929	0.923	0.922	0.915	0.906	
2.500	0.765	0.927	0.921	0.921	0.915	0.908	
1.500	0.688	0.929	0.920	0.920	0.916	0.910	
Tabi	le 9: Proces	sed COR at	Six different	pressures ti	hrough 5 Tri	als	
		Calculating Bounce 3					
Pressure	Bounce	Bounce	ute Uncert Bounce	Bounce	Bounce	Bounce	Pressure 4.500 ± 0.001 psi
(PSI)	0-1	1-2	2-3	3-4	4-5	5-6	· ·
(± 0.001)	0-1	1-2	2-3	3-4	4-3	3-0	using equation 12: $\triangle e = (0.017)0.925$
6.500	0.012	0.013	0.015	0.018	0.018	0.022	$\Delta e = (0.017)0.923$
5.500	0.010	0.011	0.012	0.014	0.016	0.019	$\triangle e \approx 0.015$
4.500	0.010	0.011	0.013	0.015	0.018	0.021	20.015
3.500	0.010	0.013	0.015	0.017	0.021	0.025	
2.500	0.010	0.015	0.018	0.021	0.025	0.029	
1.500	0.010	0.019	0.018	0.017	0.020	0.024	
				solute Uncert			
					-		

Fractional Uncertainty						
Pressure (PSI) (±0.001)	Bounce 0-1	Bounce 1-2	Bounce 2-3	Bounce 3-4	Bounce 4-5	Bounce 5-6
6.500	0.013	0.014	0.016	0.019	0.019	0.024
5.500	0.011	0.011	0.013	0.015	0.018	0.021
4.500	0.012	0.012	0.014	0.017	0.020	0.023
3.500	0.012	0.014	0.016	0.019	0.022	0.027
2.500	0.013	0.016	0.019	0.023	0.027	0.032
1.500	0.015	0.020	0.019	0.019	0.022	0.026

Table 11: Processed COR Fractional Uncertainty

Calcula	iting Bounce	e 3		
Pressur	e 3.500 \pm 0	.001 psi		
using equation 14:				
$\triangle e$	_ 1 (0.015	0.017		


$$\frac{e}{e} = \frac{1}{2} \left(\frac{1}{0.83} + \frac{1}{0.97} \right)$$

$$\frac{\triangle e}{e} = \frac{1}{2}(0.018 + 0.017)$$


$$\frac{\triangle e}{e} \approx 0.017$$

NOTE: COR is Unitless


2.3 Data Visualization

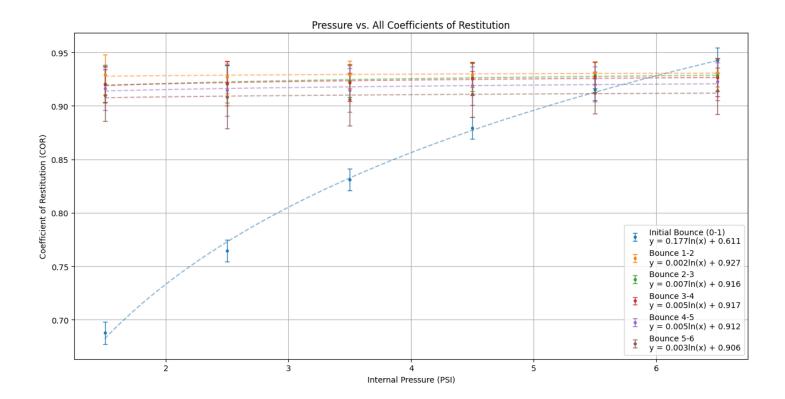

Graph 1: Data Visualization of the Coefficient of Restitution and its relationship with the Internal Pressure within 6 consecutive bounces (self-coded using python libraries matplotlib, numpy & pandas) (Appendices)

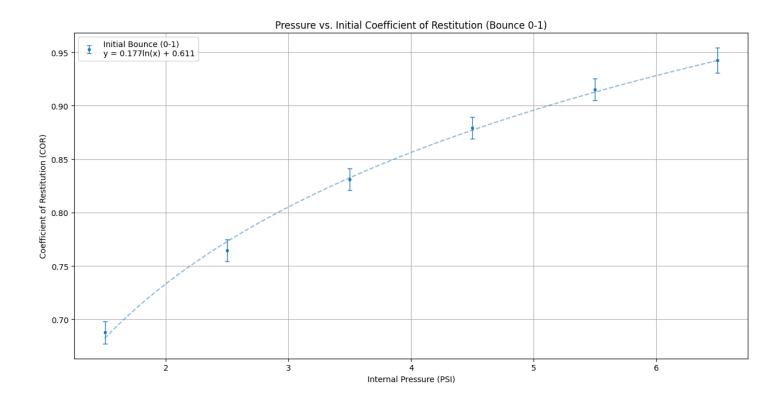

Graph 1.1: Data Visualization of the Coefficient of Restitution and its relationship with the Internal Pressure within bounces 0-1 (self-coded using python libraries matplotlib, numpy & pandas) (Appendices)

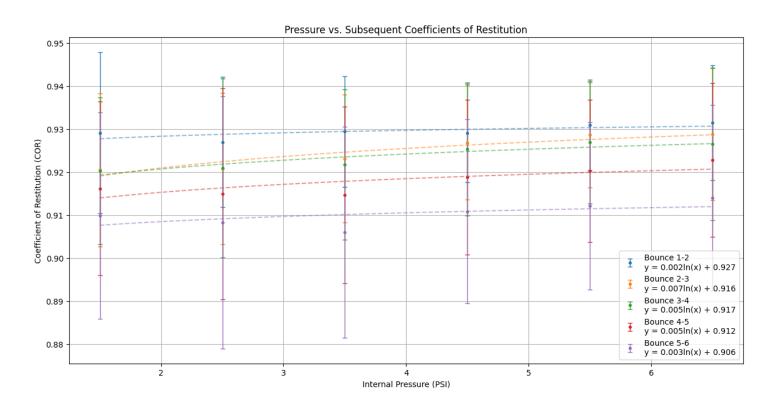

Graph 1.2: Data Visualization of the Coefficient of Restitution and its relationship with the Internal Pressure bounces 1-6 (self-coded using python libraries matplotlib, numpy & pandas) (Appendices)

NOTE: Due to viewing the Internal Pressure in the x-axis in 1 step, the uncertainty of the Internal Pressure conducted by the manufacturer is not observed.

2.4 Data Analysis

From the Data acquired from the Calculation of the Coefficient of restitution in table 9 and plotting it against the Internal Pressure of the Volleyball in Graph 1 is observed, that throughout the Bounces from 1-6 there is no significant change that could be taken into account. Taking the fact that the Data between the Coefficient of Restitution and Internal Pressure from Bounce 1-6 forms roughly a linear Relationship that remains approximately constant compared to the Data between Bounces 0-1, where there is a significant change in the Relationship between the COR and the Internal Pressure forming a logarithmic function. This is further explained in the Conclusion & Evaluation Section.

Due to the change in Behavior of the Relationship between the COR and the Pressure, to proceed in the Data analysis the mean COR across the six bounces will be taken as follows:

$$e_{avg} = \frac{1}{6} \sum_{i=1}^{6} e_i \tag{16}$$

Where:

 e_{avq} = The mean COR

 e_i = Individual COR values for each bounce

Then calculating the Fractional and Absolute Uncertainty through both equations:

Using the Standard Error of the Mean equation (SEM) this equation for the standard deviation is derived:

By dividing the Absolute uncertainty with the mean coefficient of restitution the fractional uncertainty of the mean coefficient of restitution is acquired.

$$\sigma = \frac{\sqrt{\sum_{i=1}^{n} (e_i - e_{avg})^2}}{(6-1)}$$
 (17)

$$= \frac{\sqrt{\Delta l = 1(3l - 3avg)}}{(6-1)} \qquad (17) \qquad \left(\frac{\Delta e_{avg}}{e_{avg}}\right)$$

When inserting the derived standard deviation equation into the (SEM) Equation; is the Absolute uncertainty of the Mean COR acquired:

$$\triangle e_{avg} = \frac{\sigma}{\sqrt{n}} \tag{18}$$

$$\triangle e_{avg} = \frac{\sqrt{\sum_{i=1}^{n} (e_i - e_{avg})^2}}{\frac{5}{\sqrt{6}}}$$
 (19)


Where:

 $\frac{\triangle e_{avg}}{e_{avg}}$ = Mean COR's fractional Uncertainty across six bounces

 $\triangle~e_{avg}$ = Mean COR's absolute Uncertainty across six bounces

Processed Data				Examples	
					Calculating Mean COR Pressure 3.500 \pm 0.001 psi using equation 16: $e_{avg} = \frac{(0.831 + 0.929 + \cdots + 0.907}{6}$
Pressure	Mean	Standard	Absolute	Fractional	6
(PSI)	COR	Deviation	Uncertainty	Uncertainty	$e_{avg} \approx 0.904$
(±0.001PSI)		(σ)			Calculating Standard Deviation Pressure
6.500	0.927	0.009	0.003	0.004	3.500 ± 0.001 psi using equation 17:
5.500	0.922	0.007	0.003	0.003	$\sigma =$
4.500	0.915	0.018	0.007	0.008	$\frac{\sqrt{(0.831-0.904)^2+(0.929-0.904)^2+\cdots+(0.907-0.904)^2}}{(6-1)}$
3.500	0.904	0.036	0.015	0.016	$\sigma \approx 0.036$
2.500	0.892	0.063	0.025	0.028	Calculating Absolute Uncertainty
1.500	0.880	0.094	0.038	0.043	Pressure 3.500 \pm 0.001 psi using equation 18:
Table 12: Processed mean COR with Standard deviation, Absolute & Fractional Uncertainty			$\triangle e_{avg} = \frac{0.036}{\sqrt{6}} \approx 0.015$		
					Calculating Fractional Uncertainty Pressure 3.500 \pm 0.001 psi using equation 20: $\frac{0.015}{0.904} \approx 0.016$

NOTE: Here the SEM equations were used instead of equations 14 and 15 in calculating the uncertainties due to the equations used above being good for individual COR calculations not for calculating the uncertainty of the mean COR across multiple Pressures. This results in a more precise estimate of the mean COR.

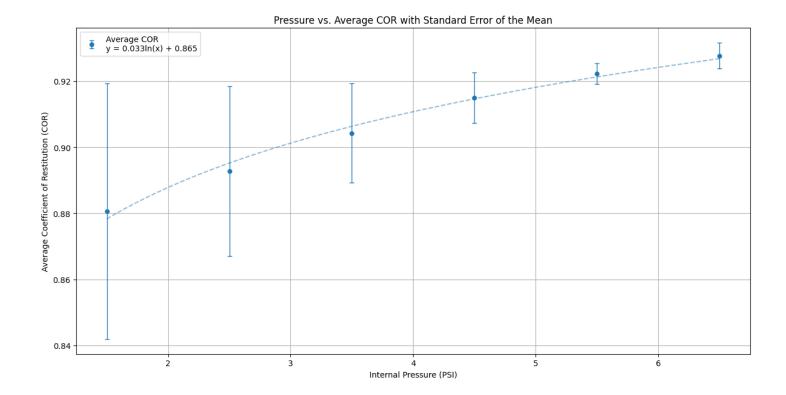

Graph 2: Data Visualization of the Mean Coefficient of Restitution and its relationship with the Internal Pressure bounces 1-6 (self-coded using python libraries matplotlib, numpy & pandas) (Appendices)

In Graph 2 it is observed that the Relationship between the COR and the Internal Pressure of the Volleyball is a logarithmic relationship, which furthermore supports my stated hypothesis.

For the function to be linear, the linear trendline must go through all Error bars, which does not happen here. This Indicates that the Relationship between the COR and the Internal Pressure of the Volleyball is not in fact a linear relationship. This supports my stated hypothesis. The logarithmic trendline fits the data points almost perfectly according to the coefficient of determination R^2 , which calculates how well the data fits a regression model. The Calculation of R^2 in the logarithmic was done by a self-programmed code using python (Appendices).

Logarithmic equation: y = 0.033076ln(x) + 0.864899 R² value: 0.989230

Figure 4: The Results of the calculated value of R^2 for the best-fit logarithmic equation in Graph 2 (self-coded using python library numpy) (Appendices)

The presented value of $R^2 = 0.989$ shows that the logarithmic trendline fits the data points near perfectly with a 98.930% accuracy. This furthermore supports the stated hypothesis.

To learn more about the relationship between the COR and the Internal Pressure of the Volleyball the gradient of the logarithmic equation acquired from graph 2 will be obtained through calculating the first derivative of the logarithmic equation:


$$\frac{d(e)}{dx} = 0.033 \times \frac{1}{p} + 0 \tag{21}$$

$$m = \frac{d(e)}{dx} = \frac{33}{1000p} \tag{22}$$

Where:

m = gradient

 $p = \text{Pressure (PSI)} \{p > 0\}$

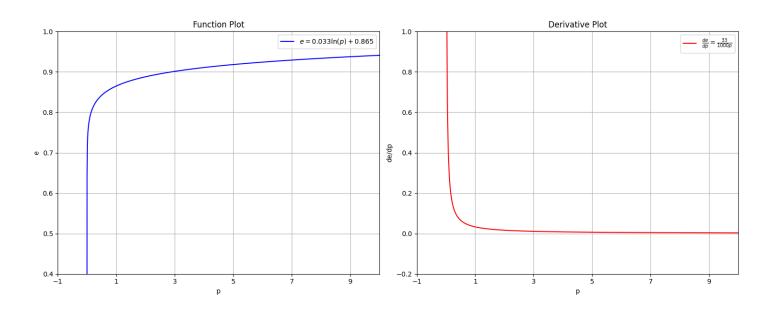

Graphs 4 & 5: Data Visualization of the logarithmic equation in Graph 2 against its derivative (self-coded using python libraries matplotlib & numpy) (Appendices)

The Gradient calculated and observed in Graph 5 forms a rational function. The rational function shows that the gradient follows a hyperbolic decay pattern, meaning that at small values of p, the

gradient is large, thus function e(p) in Graph 4 increases rapidly. As p increases in Graph 5, the gradient decreases, hence function e(p) in Graph 4 growth rate slows down. This slowing down keeps happening as p tends to infinity, which results the derivative in graph 5 to approach an asymptote at the x-axis. This furthermore supports the hypothesis presented above, where after certain p values the COR keeps increasing but at a decreasing rate. In Graph 5 is also observed that the volleyball's pressure cannot be 0 or negative that is why there is a vertical formed at x=0. Also, according to Graph 4 energy dissipates always from the volleyball as function e(p) never decreases. This indicates that the energy dissipates even when the COR and Pressure keep rising, which furthermore aligns with the hypothesis presented above and the principles of energy loss in an inelastic system. Additionally, since the gradient in graph 5 remains positive for all valid p values, it confirms that e(p) is strictly increasing, hence no pressure value leads the COR to decrease throughout the investigated range.

To furthermore explain the relationship between the COR and Pressure, linearizing the equation obtained from Graph 2 is vital through inserting the values into the Slope-intercept form of linear equations:

$$e = m \ln(p) + b \tag{23}$$

$$e = 0.033(x) + 0.865 \tag{24}$$

Where:

m = Slope

b = y-intercept

 $x = \ln(p)$

Linearized Relationship: In(Pressure) vs. Average COR with Fractional Uncertainties 0.92 0.92 0.88 0.86 0.86 0.86 0.87 0.88

Graphs 6: Data Visualization of the linearized logarithmic equation 24 with its maximum and minimum slope varients(self-coded using python libraries matplotlib, numpy & pandas) (Appendices)

In(Pressure) [In(PSI)]

1.0

Rearranging equation 24 to make the gradient the subject will result in:

0.8

0.4

0.6

$$m = \frac{e}{\ln(p)} \tag{25}$$

1.4

1.6

1.8

Hence, equation 31 shows that there is a positive linear relationship between $\ln(p)$ and the COR. This is supported by Graph 6's best-fit line, where its R^2 = 0.989 or 98.9% which furthermore supports the hypothesis mentioned before. However, the maximum and minimum slope within the error bars indicate that there could be other variations to the Slope and y-intercept in-between them.

The Absolute Uncertainty of the gradient is calculated as follows:

$$\triangle m = \frac{(\triangle \max - \triangle \min)}{2} \tag{26}$$

$$\triangle m = \frac{(0.061 - 0.003)}{2} \tag{27}$$

$$\triangle m = \pm 0.029 \tag{28}$$

The Fractional Uncertainty of the Gradient is calculated as follows:

$$\frac{\triangle m}{m} \tag{29}$$

$$\frac{0.029}{0.033}$$
 (30)

0.878 or 87.8%

Fractional Uncertainty is extensively high relative to the magnitude of the gradient. This suggests that the measurements are not very precise, as the Absolute uncertainty of the gradient being almost as large as the gradient. This will be discussed in the Evaluation section extendedly.

The p-value determines the relationship between the independent and the dependent variable. The p-value of the function was calculated using R^2 acquired from Graph 6. The p-value was calculated through self-programmed code using python (Appendices).

```
Statistical Analysis of ln(Pressure) vs COR Relationship Slope: 0.0331 ± 0.0017
Intercept: 0.8649
R-squared: 0.9892
P-value: 4.3655e-05
The relationship is statistically significant (p < 0.05)
```

Figure 5: The Results of the calculated value of R^2 for the best-fit logarithmic equation in Graph 6 (self-coded using python libraries numpy & scipy) (Appendices)

As the code states, the p-value for the linearized equation is 4.3655×10^{-5} . This is a strong indication that the relationship between Pressure and the COR is statistically significant, since the p-value is less than common significance threshold (p < 0.05).

3. Conclusion

My Research question "How does varying the internal pressure of a Volleyball in the following increments (6.500 psi, 5.500 psi, 4.500 psi, 3.500 psi, 2.500 psi, 1.500 psi) (\pm 0.001 psi) affect its coefficient of restitution after each bounce throughout six consecutive bounces released from a fixed horizontal displacement of 1.700 m (\pm 0.001 m)." aims to investigate the relationship between pressure and the COR.

With the support of the physical principles of Pressure and the COR presented in the Background information section was hypothesized, that the Relationship between the Pressure inside a Volleyball and its COR is an increasing relationship at a decreasing rate, which was extensively proven throughout the Data analysis Section specifically through Graph 5. The Raw data for the initial and final height were taken from table 5 and processed through the derived equation of the COR. Plotting the Processed data in Graph 1 for the COR against the Pressure showed the difference in the COR's behavior between the first Bounce of the Ball and the Bounces from 2-6.

The change in Behavior of the COR throughout the bounces occurred because of the relatively big difference between the initial height $(1.7\pm0.020\,m)$ and the first Bounce's rebound height or final height, which varies between $(0.804\pm0.015\,m)$ and $(1.510\pm0.020\,m)$ throughout different Pressures (table 9). That makes the difference seen in the first Column of the data in table 9 where the lowest COR calculation is (0.687 ± 0.015) , that occurs at height $(0.804\pm0.015\,m)$ and the highest COR calculation is (0.942 ± 0.013) at height $(1.510\pm0.020\,m)$. On the other hand, in Graph 1.2 is observed that by calculating the COR of the Second to the 6th bounce, the difference between the initial height the ball was released from – which is in practice the final height of the bounce preceding as observed through the general equation presented in the data processing section (equation 10), and the final height is relatively smaller than the difference between Bounce 0-1. This resulted in the Graph 1 the Bounces from 2-6 to appear as a constant, which is right relative to the first Bounce but wrong relative to each other, as observed in Graph 1.2.

This change in Behavior is the results of the Pressure variations being too narrow to each other, which is limited by the Volleyball's material. This is further explained in the Evaluation section.

Furthermore, the p-value resulting in such a small number (Figure 4) indicates that the observed variations in the COR of the volleyball are unlikely to be due to random chance alone and internal Pressure plays a significant role in determining the rebound height of the ball, hence its COR. The small p-value supports also the validity of the linearized model in describing the relationship between pressure and COR.

4. Evaluation

4.1 Uncertainty

The ranges of the magnitudes of the COR calculated from individual trials varied greatly for different pressure data points across 6 bounces. The smallest range of \pm 0.003 was recorded at pressure 5.5 PSI (\pm 0.001 PSI), while the largest range of \pm 0.0387 was recorded at pressure 1.5 PSI (\pm 0.001 PSI). This variation happens because of lower pressures introducing more inconsistencies across 6 Bounces. On the other hand, in high pressures there is a more predictable way of the ball behaving, thus reduces measurement variability.

These uncertainties do in fact originate from both random and systematic errors. However, their overall consistency suggests that the experimental setup was well-controlled. Yet, minor errors such as inconsistencies in the Volleyball's landing orientation, the ball not bouncing perfectly vertical and making horizontal displacement while falling could have influenced the results. These potential sources of error align with the patters observed in the raw data in table 5 and processed data of the COR in (table 9).

4.2 Comparison

According to a research conducted on the same topic, a logarithmic relationship between the COR and the Pressure was found indicating that as pressure increases, the COR increases at a decreasing rate (K. Osman and B.S. Kim, 2009). This is supported by the physical characteristics of pressure. Hile higher pressure enhances the ball's ability to retain and transfer kinetic energy, this effect diminishes after a certain point, leading to the decay pattern. This matches the hypothesis mentioned before.

4.3 Strength

Strength	Discussion		
Preliminary trials	Taking initial tests helped identify any potential sources of error such as not		
	using Pressures less than 1.500 ±0.001 psi because it results into the		
	Volleyball not going through all 6 bounces.		
Data Calculated	To ensure precision and minimize error margins in my calculations, I		
computationally	developed a program that automates data processing and analysis by using		
	python libraries like Numpy, Scipy and Matplotib. This Calculates using the		
	derived formula the COR of the Volleyball for each trial at each bounce and		
	creates graphs and analyze trends with the necessary error bars to ensure		
	data precision. (Available in the Appendices)		

4.4 Weaknesses and Limitation

Source of Error	Impact on Results	Improvement	
Video tracking	Variability in tracking the volleyball's	Using Cameras that capture at	
precision	rebound height from the same point of the	higher speeds to ensure precise	
	ball throughout the bounces may have	data collection.	
	,	data collection.	
	led to fluctuations in calculated values.		
Environmental	Small air currents, vibrations, and surface	Eliminating external disturbances	
factors	imperfections might have caused slight	through conducting the experiment	
	inconsistencies in the COR.	in a fully enclosed and controlled	
		environment.	
Human error in	Slight changes in how the volleyball was	Implementing a mechanical release	
releasing the ball	released might have affected energy	mechanism to ensure uniform drop	
	transfer, which lead to slight	conditions across all trials and	
	inconsistencies in the data collection.	through different Pressures	
Surface	The repeated impacts might have altered	Using multiple volleyballs of the	
deformation	the elasticity of the volleyball slightly over	same model and material.	
	multiple trials, leading to a gradual		
	change in the coefficient of restitution.		
Measurement	The measuring tape and video calibration	Utilizing laser or sound based	
limitations		, and the second	
	may have introduced small inaccuracies	measurement tools for improved	
	in the recorded rebound heights, hence	precision.	
	affecting the calculated COR.		

4.5 Extension

An extension to the topic of this investigation could test the effect of the COR in different types of balls at the same pressure. This could reveal how material composition across different balls behave with the COR. Another interesting extension is modelling the Energy loss over time through deriving an equation for energy loss per bounce and compare it to theoretical models. This is interesting because it puts other variables into the equation such as air resistance and surface deformation effects.

5. Bibliography

Works Cited

"Chapter 5: The Science of Soccer." *How Things Work (PHYS1055) / Revealing the Magic in Everyday Life (PHYS0612*), Department of Physics, University of Hong Kong, www.physics.hku.hk/~phys1055/lectures/chap05.html.

"Coefficient of Restitution - Definition, Range of Values, Examples, Solved Problems." BYJU'S, www.byjus.com/jee/coefficient-of-restitution/. A

"Coefficient of Restitution: Definition, Explanation and Formula." *ScienceABC*, 16 Oct. 2017, www.scienceabc.com/pure-sciences/coefficient-of-restitution-definition-explanation-and-formula.html.

"Coefficient of Restitution: Why Certain Objects Are More Bouncy Than Others?" *YouTube*, uploaded by ScienceABC, 16 Oct. 2017, youtu.be/QR1qJX_bEG8.

Effective Citing and Referencing. International Baccalaureate Organization, www.ibo.org/contentassets/76d2b6d4731f44ff800d0d06d371a892/effective-citing-and-referencing-en.pdf.

Official Volleyball Rules 2021-2024. Fédération Internationale de Volleyball, 2021, www.fivb.com/wp-content/uploads/2024/03/FIVB-Volleyball Rules 2021 2024 pe.pdf.

"Law of Conservation of Energy." *Energy Education*,

energyeducation.ca/encyclopedia/Law_of_conservation_of_energy. Accessed 11 Feb. 2025.

"New Olympic Sports 2024 Paris." *Sportico*, 2024, <u>www.sportico.com/leagues/olympics/2024/new-olympic-sports-2024-paris-1234775913/.</u>

"Psi to kPa Conversion." *UnitConverters.net*, <u>www.unitconverters.net/pressure/psi-to-kpa.htm.</u>

"Tracker." Physlets, physlets.org/tracker/

"V330W." Mikasa Sports USA, Mikasa Sports USA, mikasasports.com/shop/indoor-volleyball/v330w/

"Volleyball." Dimensions.com, www.dimensions.com/element/volleyball

Georgallas, A., & Landry, G. (2015). *The coefficient of restitution of pressurized balls: A mechanistic model. Canadian Journal of Physics*, 94(1), 42–46. https://doi.org/10.1139/cjp-2015-0378

Tools:

Canva. www.canva.com/. Accessed 11 Feb. 2025.

Citation Machine. www.citationmachine.net/. Accessed 11 Feb. 2025.

Clastify. www.clastify.com/. Accessed 11 Feb. 2025.

ChatGPT. chatgpt.com/. Accessed 11 Feb. 2025.

Image to Text. www.imagetotext.info/. Accessed 11 Feb. 2025.

Thesaurus.com. www.thesaurus.com/. Accessed 11 Feb. 2025.

6. Appendices

All The Code & data used to plot graphs and do the Calculations is uploaded to github: https://github.com/Seif-kh1/Physics-IA/tree/master/IA%20program%20for%20graphs