


# 3D Transformation

## Rotation


3D rotation is not same as 2D rotation. In 3D rotation, we have to specify the angle of rotation along with the axis of rotation. We can perform 3D rotation about X, Y, and Z axes. They are represented in the matrix form as below –

$$R_x(\theta) = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos\theta & -\sin\theta & 0 \\ 0 & \sin\theta & \cos\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad R_y(\theta) = \begin{bmatrix} \cos\theta & 0 & \sin\theta & 0 \\ 0 & 1 & 0 & 0 \\ -\sin\theta & 0 & \cos\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad R_z(\theta) = \begin{bmatrix} \cos\theta & -\sin\theta & 0 & 0 \\ \sin\theta & \cos\theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$


The following figure explains the rotation about various axes –

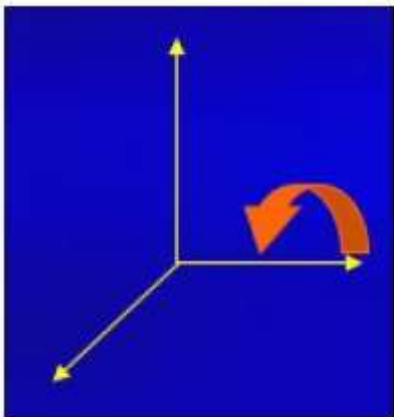


**Rotation about x-axis**

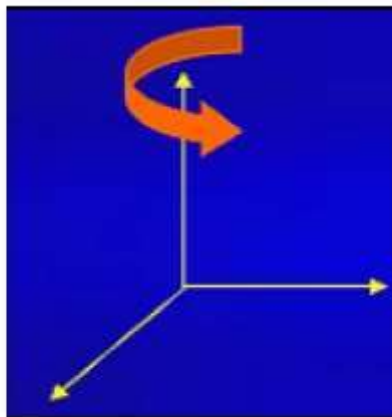

**Rotation about y-axis**

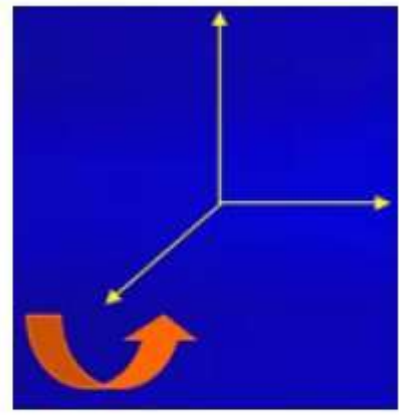


**Rotation about z-axis**

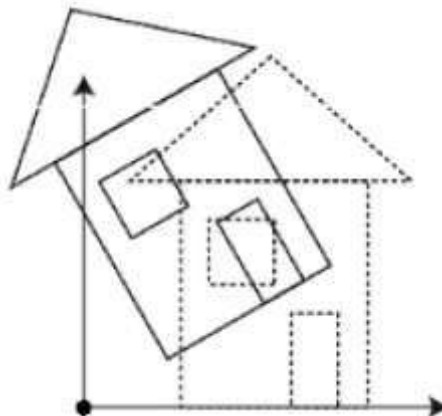

## Scaling

You can change the size of an object using scaling transformation. In the scaling process, you either expand or compress the dimensions of the object. Scaling can be achieved by multiplying the original coordinates of the object with the scaling factor to get the desired result. The following figure shows the effect of 3D scaling –

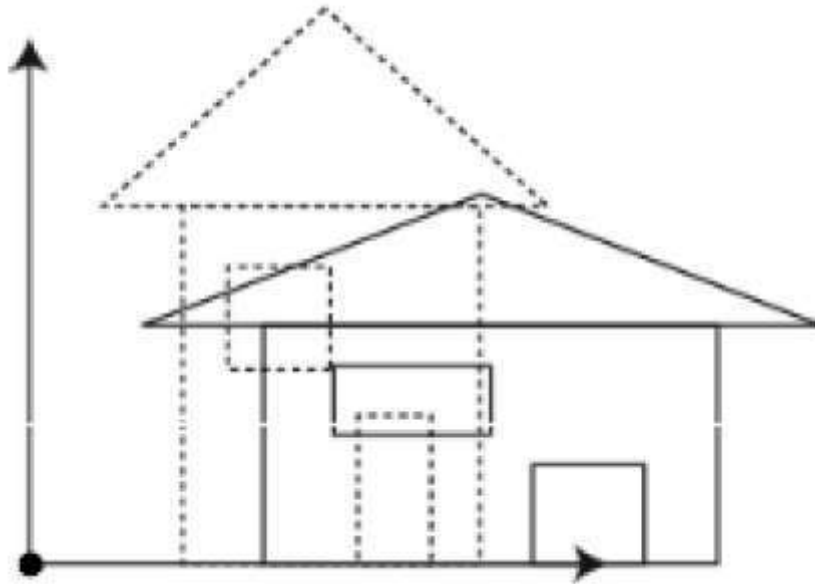

In 3D scaling operation, three coordinates are used. Let us assume that the original coordinates are  $X, Y, Z$ , scaling factors are  $(S_x, S_y, S_z)$  respectively, and the produced coordinates are  $X', Y', Z'$ . This can be mathematically represented as shown below –

$$S = \begin{bmatrix} S_x & 0 & 0 & 0 \\ 0 & S_y & 0 & 0 \\ 0 & 0 & S_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$


$$P' = P \cdot S$$

$$[X' \ Y' \ Z' \ 1] = [X \ Y \ Z \ 1] \begin{bmatrix} S_x & 0 & 0 & 0 \\ 0 & S_y & 0 & 0 \\ 0 & 0 & S_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$= [X \cdot S_x \ Y \cdot S_y \ Z \cdot S_z \ 1]$$

## Shear

A transformation that slants the shape of an object is called the **shear transformation**. Like in 2D shear, we can shear an object along the X-axis, Y-axis, or Z-axis in 3D.

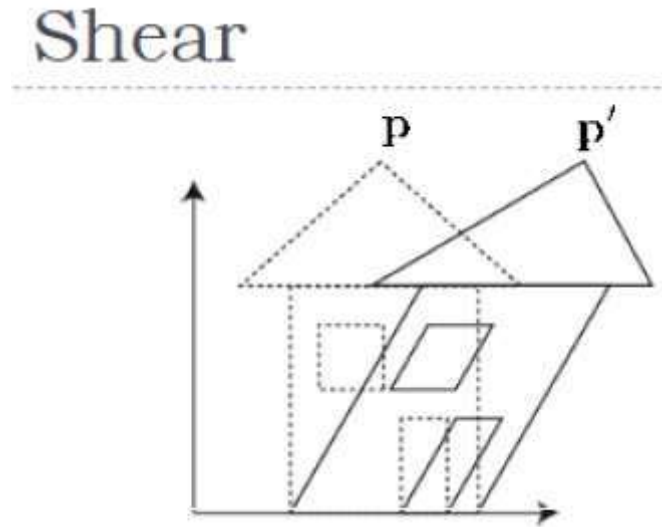

As shown in the above figure, there is a coordinate P. You can shear it to get a new coordinate P', which can be represented in 3D matrix form as below –

$$Sh = \begin{bmatrix} 1 & sh_x^y & sh_x^z & 0 \\ sh_y^x & 1 & sh_y^z & 0 \\ sh_z^x & sh_z^y & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$P' = P \cdot Sh$$

$$X' = X + Sh_x^y Y + Sh_x^z Z$$

$$Y' = Sh_y^x X + Y + sh_y^z Z$$

$$Z' = Sh_z^x X + Sh_z^y Y + Z$$

## Transformation Matrices

Transformation matrix is a basic tool for transformation. A matrix with n x m dimensions is multiplied with the coordinate of objects. Usually 3 x 3 or 4 x 4 matrices

are used for transformation. For example, consider the following matrix for various operation.