




Welcome to


## 7. Network Management

Communication and Network Security 2023

Henrik Kramselund he/him han/ham hlk@zencurity.com @kramse

Slides are available as PDF, [kramse@Github](#)   
7-Network-Management.tex in the repo security-courses

# Goals for today

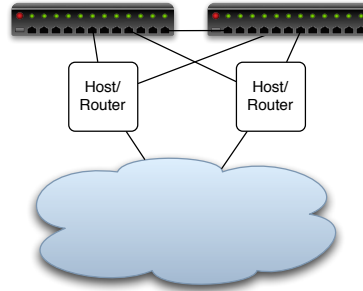

Today's goals:

- Understand why managed networks are more secure
- Show the most important components for secure networks
- Network management protocols, techniques, systems
- Introduce some essential tools for network management

# Plan for today



## Subjects

- Network Management
- SNMP version 2 vs version 3
- Bruteforcing network devices SSH vs SNMP
- Centralized management, Jump hosts
- Ansible introduction
- Secure Shell keys
- Monitoring with LibreNMS

## Exercises

- Run SNMP walk
- Try brute-force SNMP

# Time schedule



- 17:00 - 18:15  
Introduction and basics
- 30min break
- 18:45 - 19:30
- 15min break
- 19:45 -20:30 45min

# Reading Summary



Network management is the process of administering and managing computer networks. Services provided by this discipline include fault analysis, performance management, provisioning of networks and maintaining the quality of service. Software that enables network administrators to perform their functions is called network management software.

[https://en.wikipedia.org/wiki/Network\\_management](https://en.wikipedia.org/wiki/Network_management)

PPA chapter 10,11 - 58 pages

Skim:

<https://nsrc.org/workshops/2015/sanog25-nmm-tutorial/materials/snmp.pdf>

Very common network security task to follow guides like the ones from NSRC.org

## Reading Summary, continued



### PPA chapter 10: Basic Real-World Scenarios

- Missing Content, Analysis, Statistics
- Its always Domain Name System (DNS), but not this time
- SYN sent, no response - TCP problems
- HTTP investigation

Different layers, and effective problem solving

## Reading Summary, continued



### PPA chapter 11: Fighting a Slow Network

- TCP Error-Recovery Features, TCP retransmissions
- TCP Flow Control
- TCP Window Size

Much of this is not directly related to security, but being able to identify network problems vs security problems is often needed

I can highly recommend SmokePing <https://oss.oetiker.ch/smokeping/>

# Exercise



Now lets do the exercise

## **i** PPA Chapter 10 ESPN pcap - 20min

which is number **50** in the exercise PDF.



# What is a core network service?



## Core Network Services

- These are critical for the network to operate correctly. IP packets may flow in the network, but if these services don't reply or aren't configured correctly, users and devices won't be able to connect, authentication services may fail, and network applications won't be accessible.
- They are:
  1. DNS
  2. DHCP
  3. NTP



### Source:

[https://nsrc.org/workshops/2018/tenet-nsrc-cndo/networking/cndo/en/presentations/Campus\\_Operations\\_BCP.pdf](https://nsrc.org/workshops/2018/tenet-nsrc-cndo/networking/cndo/en/presentations/Campus_Operations_BCP.pdf)

# Network Management



Network management is the process of administering and managing computer networks. Services provided by this discipline include fault analysis, performance management, provisioning of networks and maintaining the quality of service. Software that enables network administrators to perform their functions is called network management software.

Source:

[https://en.wikipedia.org/wiki/Network\\_management](https://en.wikipedia.org/wiki/Network_management)

# NTP Network Time Protocol



Vigtigt at netværksenheder bruger korrekt tid, sikkerhed og drift

Server NTP foregår typisk i `/etc/ntp.conf` eller `/etc/ntpd.conf`

det vigtigste er navnet på den/de servere man vil bruge som tidskilde

Brug enten en NTP server hos din udbyder eller en fra <http://www.pool.ntp.org/>


Du kan også selv køre NTP på 3 servere internt

Eksempelvis:

```
server 0.dk.pool.ntp.org
```

```
server 0.europe.pool.ntp.org
```

```
server 3.europe.pool.ntp.org
```

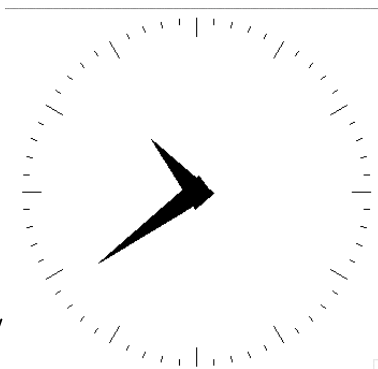

## What time is it? - spørg ICMP



ICMP timestamp option - request/reply

hvad er klokken på en server

Slayer icmpush - er installeret på server  
viser tidstempel

```
# icmpush -v -tstamp 10.0.0.12
```

```
ICMP Timestamp Request packet sent to 10.0.0.12 (10.0.0.12)
```

```
Receiving ICMP replies ...
```

```
fischer          -> 21:27:17
```

```
icmpush: Program finished OK
```

# Stop - NTP Konfigurationseksempler



Vi har en masse udstyr, de meste kan NTP, men hvordan

Vi gennemgår, eller I undersøger selv:

- Switche (managed)
- OpenBSD - check man `rdate` og man `ntpd`
- Mac OS X / Windows / Linux - jeres laptops

# BIND DNS server



BIND 9 is transparent open source. If your organization needs some functionality that is not in BIND 9, you can modify it, and contribute the new feature back to the the community by sending us your source. Download a tarball from the ISC web site or <ftp.isc.org>, or a binary from your operating system repository. BIND 9 has evolved to be a very flexible, full-featured DNS system. Whatever your application is, BIND 9 most likely has the required features.

<https://www.isc.org/downloads/bind/>

Berkeley Internet Name Daemon server – historisk den mest brugte, i dag anbefales andre

Konfigureres gennem `named.conf`

det anbefales ikke at bruge BIND version 9, ej heller BIND 10

Jeg foretrækker produkterne fra NLNetlabs Unbound og NSD

# BIND konfiguration - et udgangspunkt



```
acl internals { 127.0.0.1; ::1; 10.0.0.0/24; };
options {
    port 53; version "Dont know"; allow-query { any; };
};
view "internal" {
    match-clients { internals; };
    recursion yes;
    zone "." {
        type hint;    file "root.cache"; };
    // localhost forward lookup
    zone "localhost." {
        type master; file "internal/db.localhost";    };
    // localhost reverse lookup from IPv4 address
    zone "0.0.127.in-addr.arpa" {
        type master; file "internal/db.127.0.0"; notify no;    };
    ...
}
```

# Små DNS tools bind-version - Shell script



```
#!/bin/sh
# Try to get version info from BIND server
PROGRAM=`basename $0`

if [ $# -ne 1 ]; then
    echo "get BIND name server version, need a target! "
    echo "Usage: $0 target"
    echo "example $0 10.1.2.3"
    exit 0
fi
TARGET=$1
# using dig
dig @$1 version.bind chaos txt
echo Authors BIND er i versionerne 9.1 og 9.2 - måske ...
dig @$1 authors.bind chaos txt
```



# Små DNS tools dns-timecheck - Perl script



```
#!/usr/bin/perl
# modified from original by Henrik Kramshøj, hlk@kramse.dk
# Original from: http://www.rfc.se/fpdns/timecheck.html
use Net::DNS;

my $resolver = Net::DNS::Resolver->new;
$resolver->nameservers($ARGV[0]);
my $query = Net::DNS::Packet->new;
$query->sign_tsig("n","test");

my $response = $resolver->send($query);
foreach my $rr ($response->additional) {
    print "localtime vs nameserver $ARGV[0] time difference: ";
    print $rr->time_signed - time() if $rr->type eq "TSIG";
}
```

# Unbound and NSD



Unbound is a validating, recursive, caching DNS resolver. It is designed to be fast and lean and incorporates modern features based on open standards.

To help increase online privacy, Unbound supports DNS-over-TLS which allows clients to encrypt their communication. In addition, it supports various modern standards that limit the amount of data exchanged with authoritative servers.

<https://www.nlnetlabs.nl/projects/unbound/about/>

My preferred local DNS server. We will now stop and look at this configuration file and function.

Also check out uncensored DNS and his DNS over TLS setup!

Even has pinning information available:

<https://blog.censurfridns.dk/blog/32-dns-over-tls-pinning-information-for-unicastcensurfridnsdk/>

# DHCPD server



Dynamic Host Configuration Protocol Server

Mange bruger DHCPD fra Internet Systems Consortium

<http://www.isc.org> - altså Open Source

konfigureres gennem `dhcpd.conf` - næsten samme syntaks som BIND

DHCP er en efterfølger til BOOTP protokollen

```
ddns-update-style ad-hoc;  
shared-network LOCAL-NET {  
    option domain-name "zencurity.com";  
    option domain-name-servers 10.0.45.1;  
    subnet 10.0.45.0 netmask 255.255.255.0 {  
        option routers 10.0.45.1;  
        range 10.0.45.32 10.0.45.127;  
    }  
}
```

## Rogue DHCP servers



Common problem in networks is people connecting devices with DHCPD servers

In general make sure to segment networks

Start to use port security on switches, including DHCP snooping

[https://en.wikipedia.org/wiki/DHCP\\_snooping](https://en.wikipedia.org/wiki/DHCP_snooping)

## Example port security



```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/1 mac-limit 4
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
set interface ge-0/0/2 mac-limit 4
set interface ge-0/0/1 persistent-learning
set interface ge-0/0/8 dhcp-trusted
set vlan employee-vlan arp-inspection
set vlan employee-vlan examine-dhcp
set vlan employee-vlan mac-move-limit 5
```

Source: Overview of Port Security, Juniper

[https://www.juniper.net/documentation/en\\_US/junos/topics/example/overview-port-security.html](https://www.juniper.net/documentation/en_US/junos/topics/example/overview-port-security.html)

Other vendors have similar documentation

# Simple Network Management Protocol



SNMP er en protokol der supporteres af de fleste professionelle netværksenheder, såsom switche, routere

hosts - skal slås til men følger som regel med

SNMP bruges til:

- *network management*
- statistik
- rapportering af fejl - SNMP traps

**sikkerheden baseres på community strings der sendes som klartekst ...**

det er nemmere at brute-force en community string end en brugerid/kodeord kombination

## SNMP version 2 vs version 3



- SNMP versions 1 and 2c are insecure
- SNMP version 3 created to fix this
- Authenticity and integrity: Keys are used for users and messages have digital signatures generated with a hash function (MD5 or SHA)
- Privacy: Messages can be encrypted with secret-key (private) algorithms

Example for Juniper can be found at:

[https://www.juniper.net/documentation/en\\_US/junos/topics/example/snmpv3-configuration-junos-nm.html](https://www.juniper.net/documentation/en_US/junos/topics/example/snmpv3-configuration-junos-nm.html)



Simple Network Management Protocol

sikkerheden afhænger alene af en Community string SNMPv2

typisk er den nem at gætte:

- public - default til at aflæse statistik
- private - default når man skal ændre på enheden, skrive
- cisco
- ...

Der findes lister og ordbøger på nettet over kendte default communities





kan være svært at finde ... det er UDP 161

Hvis man finder en så prøv at bruge **snmpwalk** programmet - det kan vise alle tilgængelige SNMP oplysninger fra den pågældende host

det kan være en af måderne at identificere uautoriserede enheder på - sweep efter port 161/UDP  
snmpwalk er et af de mest brugte programmer til at hente snmp oplysninger - i forbindelse med hackning og penetrationstest



Typisk brug er:

```
snmpwalk -v 1 -c secret switch1
```

```
snmpwalk -v 2c -c secret switch1
```

Eventuelt bruges snmpget og snmpset

Ovenstående er en del af Net-SNMP pakken, <http://net-snmp.sourceforge.net/>

# Bruteforcing network devices SSH vs SNMP



hvad betyder bruteforcing?  
afprøvning af alle mulighederne

Hydra v2.5 (c) 2003 by van Hauser / THC <vh@thc.org>

Syntax: hydra [[[-l LOGIN|-L FILE] [-p PASS|-P FILE]] | [-C FILE]]

[-o FILE] [-t TASKS] [-g TASKS] [-T SERVERS] [-M FILE] [-w TIME]

[-f] [-e ns] [-s PORT] [-S] [-vV] server service [OPT]

Options:

- S connect via SSL
- s PORT if the service is on a different default port, define it here
- l LOGIN or -L FILE login with LOGIN name, or load several logins from FILE
- p PASS or -P FILE try password PASS, or load several passwords from FILE
- e ns additional checks, "n" for null password, "s" try login as pass
- C FILE colon separated "login:pass" format, instead of -L/-P option
- M FILE file containing server list (parallizes attacks, see -T)
- o FILE write found login/password pairs to FILE instead of stdout

...

# Eksempler på SNMP og management



Ofte foregår administration af netværksenheder via HTTP, Telnet eller SSH

- små dumme enheder er idag ofte web-enablet
- bedre enheder giver både HTTP og kommandolinieadgang
- de bedste giver mulighed for SSH, fremfor Telnet

Det er idag muligt at bruge scripting, som:

- RANCID <http://www.shrubbery.net/rancid/>
- Ansible <https://www.ansible.com/>
- Python
- Also make sure to note down <https://github.com/ytti/oxidized>

Oxidized is a network device configuration backup tool. It's a RANCID replacement!

# RANCID output



```
From: rancid@[redacted]  
Subject: carrier-switches router config diffs  
Date: 19. jan 2011 02.09.28 CET  
To: rancid-carrier-switches@[redacted]  
  
Index: configs/c1-cph-01  
-----  
- -- configs/c1-cph-01 (revision 1457)  
@@ -210,7 +210,7 @@  
exit  
!  
interface ethernet 1/g45  
- description 'SRX240'  
+ description 'SRX-CPH-02 ge-0/0/0'  
switchport mode general  
switchport general allowed vlan add 95,3000-3005 tagged  
exit
```

Better to use <https://github.com/ytti/oxidized>

# Exercise




Now lets do the exercise

**⚠️ SNMP walk 15min**

which is number **51** in the exercise PDF.

# Exercise

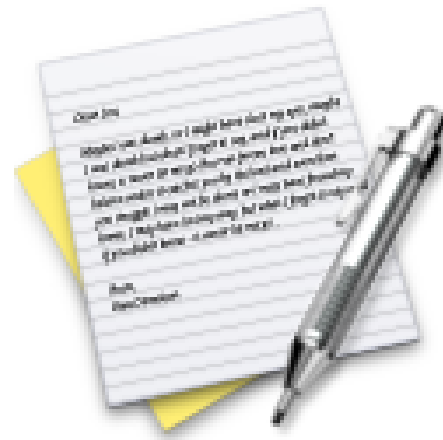

Now lets do the exercise

**i Try Hydra brute force 30min**

which is number **52** in the exercise PDF.

## Step 1: configure devices properly



You should always configure your devices properly

Turn on SNMP, probably SNMPv2

Turn on LLDP Link Layer Discovery Protocol – vendor-neutral

[http://en.wikipedia.org/wiki/Link\\_Layer\\_Discovery\\_Protocol](http://en.wikipedia.org/wiki/Link_Layer_Discovery_Protocol)

Centralized syslog

And updated firmware, HTTPS and SSH only etc. the usual stuff



## Config example: SNMP



```
snmp {  
    description "SW-CPH-02";  
    location "Interxion, Ballerup, Denmark";  
    contact "noc@zencurity.com";  
    community yourcommunitynotmine {  
        authorization read-only;  
        clients {  
            10.1.1.1/32;  
            10.1.2.2/32;  
        }  
    }  
}
```

LibreNMS kan bruge en adresse eller GPS lokation i [ ]

# Config example: LLDP




Dell

8024F


switch

LLDP

```
interface ethernet 1/xg17
mtu 9216
lldp transmit-tlv port-desc sys-name sys-desc sys-cap
lldp transmit-mgmt
exit
```

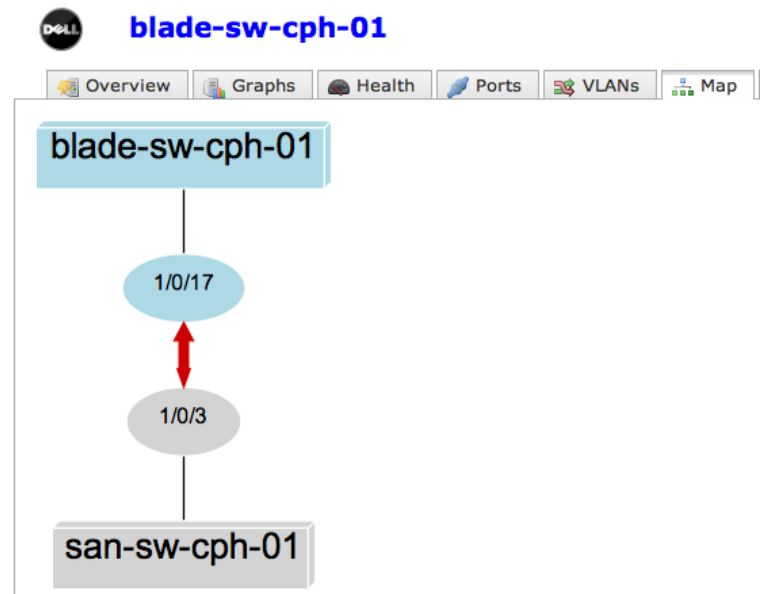

# LLDP spaghetti?

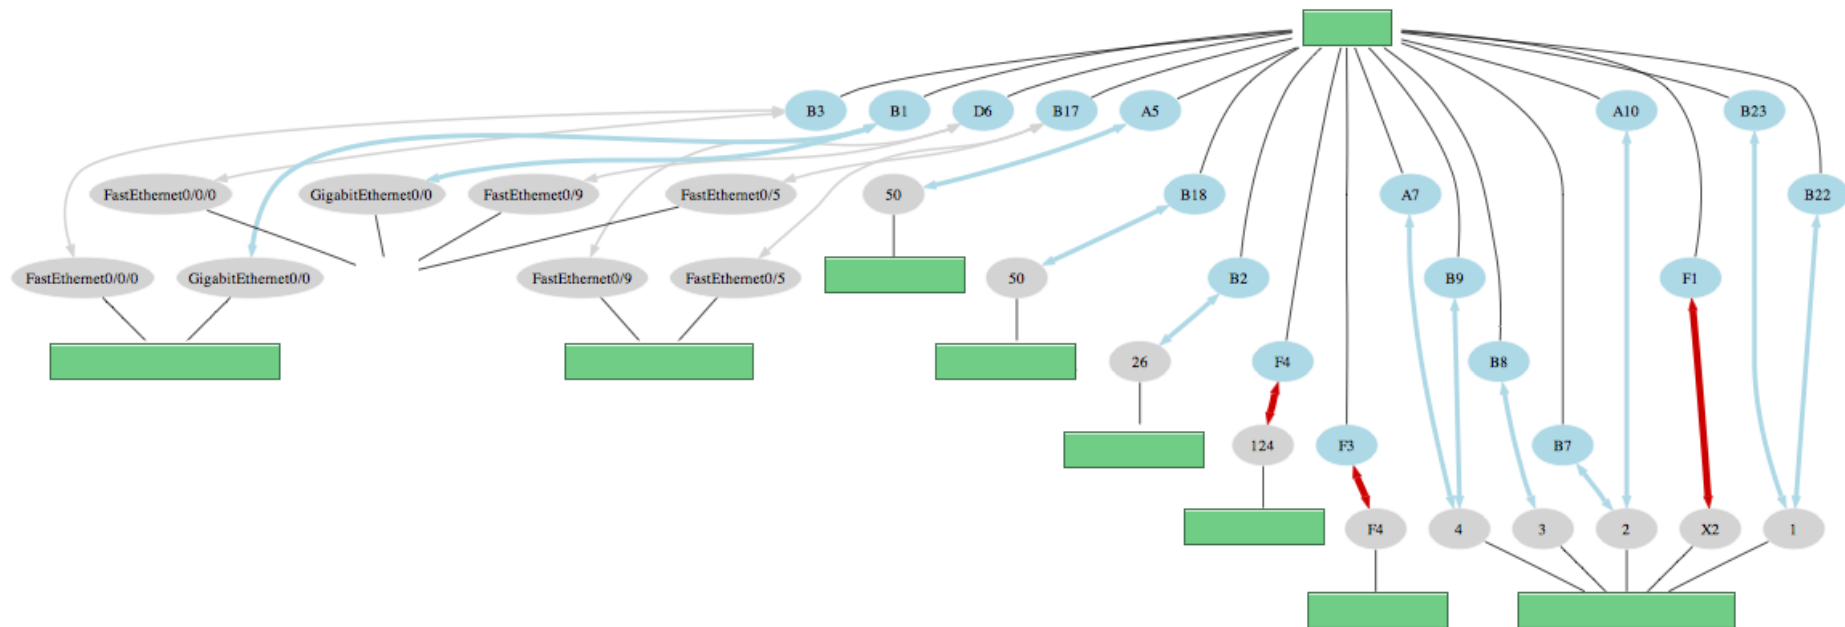

LLDP is needed!

# LLDP trick using tcpdump



```
[hlk@ljh ~]$ sudo tcpdump -i eth0 ether proto 0x88cc
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on eth0, link-type EN10MB (Ethernet), capture size 96 bytes
.... wait for it ....
11:03:55.395064 00:1c:23:80:49:ff (oui Unknown) > 01:80:c2:00:00:0e (oui Unknown),
ethertype Unknown (0x88cc), length 60:
0x0000:  0207 0400 1c23 8049 fd04 0705 312f 302f  .....#.I....1/0/
0x0010:  3331 0602 0078 0000 0000 0000 0000 0000  31...x.....
0x0020:  0000 0000 0000 0000 0000 0000 0000 0000  .....

1 packets captured
3 packets received by filter
0 packets dropped by kernel
```

I know **for sure** that this server is in Unit 1 port 31!

## Basic stuff - consoles



*Conserver is an application that allows multiple users to watch a serial console at the same time. It can log the data, allows users to take write-access of a console (one at a time), and has a variety of bells and whistles to accentuate that basic functionality.*

Watch the console!

A network device rebooted - what happened?

I accidently the whole network, what now?

Serial consoles are not dead, and still very useful

<http://www.conserver.com/>

# Hardware and software



Soekris, 4-port serial card EUR59 / 430DKK + OpenBSD + conserver

# Conserver is easy



```
### set the defaults for all the consoles
# these get applied before anything else
default * {
    # The '&' character is substituted with the console name
    logfile /var/consoles/&;
    # timestamps every hour with activity and break logging
    timestamp 1hab;
    # include the 'full' default
    include full;
    # master server is localhost
    master localhost;
}
...
console portS1 {
    type device;
    device /dev/cua02; parity none; baud 57600;
    idlestring "#";
    idletimeout 5m;           # send a '#' every 5 minutes of idle
    timestamp "";            # no timestamps on this console
}
```

You will actually be able to say what happened at that device

## Centralized management SSH, Jump hosts



A jump server, jump host or jumpbox is a computer on a network used to access and manage devices in a separate security zone. The most common example is managing a host in a DMZ from trusted networks or computers.

[https://en.wikipedia.org/wiki/Jump\\_server](https://en.wikipedia.org/wiki/Jump_server)



# OpenSSH client config with jump host



My recommended SSH client settings, put in \$HOME/.ssh/config:

```
Host *
    ServerAliveInterval=30
    ServerAliveCountMax=30
    NoHostAuthenticationForLocalhost yes
    HashKnownHosts yes
    UseRoaming no

Host jump-01
    Hostname 10.1.2.3
    Port 12345678
Host fw-site-01 10.1.2.5
    User hlk
    Port 34
    Hostname 10.1.2.5
    ProxyCommand ssh -q -a -x jump-01 -W %h:%p
Host anotherhost01
    ProxyJump hkj@jump-01
```

I configure fw using both hostname and IP,

then I can use name, and any program using IP get this config too



# What is Ansible



## AUTOMATION FOR EVERYONE

Ansible is designed around the way people work and the way people work together.

Ansible has thousands of users, hundreds of customers and over 2,400 community contributors.

750+ Ansible modules

<https://www.ansible.com/>

# How Ansible Works: inventory files



List your hosts in one or multiple text files:

```
[all:vars]
ansible_ssh_port=34443

[office:vars]
ansible_python_interpreter=/usr/local/bin/python
ansible_ssh_port=2200

[office]
fw-01 ansible_ssh_host=192.168.1.1 ansible_ssh_port=22123

[infrastructure]
smtp-01      ansible_ssh_host=192.0.2.10
vpnmon-01    ansible_ssh_host=10.50.60.18
```

- Inventory files specify the hosts we work with, office and infrastructure are group names
- Real inventory for a site with development and staging may be 500 lines

# How Ansible Works: ad hoc commands



Using the inventory file you can run commands with Ansible:

```
ansible -m ping new-server
ansible -a "date" new-server
ansible -m shell -a "grep a /etc/something" new-server
```

- Running commands on multiple servers is easy now
- This alone has value, you can start
- Checking settings on servers
- Making small changes to servers

# How Ansible Works: Playbooks



The benefit comes with tasks listed in playbooks - do something:

```
- hosts: smartbox-*
  become: yes
  tasks:
    - name: Create a template pf.conf
      template:
        src=pf/pf.conf.j2
        dest=/etc/pf.conf owner=root group=wheel mode=0600
      notify:
        - reload pf
      tags:
        - firewall
        - pf.conf
```

- Specify the end result, more than the steps, also restarts daemons
- Use the modules from [https://docs.ansible.com/ansible/modules\\_by\\_category.html](https://docs.ansible.com/ansible/modules_by_category.html)
- Jinja templates - ooooooh so great!

## How Ansible Works: typical execution



```
ansible-playbook -i hosts.cph1 -K infrastructure-firewalls.yml -t pf.conf --check --diff
```

```
ansible-playbook -i hosts.cph1 -K infrastructure-firewalls.yml -t pf.conf
```

```
ansible-playbook -i hosts.cph1 -K infrastructure-nagios.yml -t config-only
```

```
ansible-playbook -i smartboxes -K create-pf-conf.yml -l smartbox-xxx-01
```

- Pro tip: check before you push out changes to production networks 😊
- Check will see if something needs changing
- Diff will show the changes about to be made

# How Ansible Works: atypical execution / gotchas



```
ansible -i ../smartboxes.osl1 --become --ask-become-pass -m shell  
-a "pfctl -s rules" -l smartbox01
```

```
ansible -i ../smartboxes.osl1 --become --ask-become-pass -m shell  
-a "nmap -sP 185.161.1xx.123-124 2> /dev/null| grep done" all
```

- Sometimes you need a trick or persistence
- Ansible moving from *sudo* to *become*
- The normal *-K* did not work, but the above does for ad hoc commands



# Life of a server



- Create VM
- Network install - with pxeboot
- Standard settings: hostname, LDAP, SSH, timezone, ...
- Configure this server: application installation, settings, etc.
- Configure monitoring: like Smokeping

# Get ready, Up and running with Ansible



Prerequisites for Ansible - you need a Linux machine:

- python language - Ansible uses this
- ssh keys - remote login without passwords
- Sudo - allow regular users to do superuser tasks
- Recommended tool: `ssh-copy-id` for getting your key on new server
- Recommended Change: `sshd_config` - no passwords allowed, no bruteforce
- Recommended to use: `jump hosts/ProxyCommand` in `ssh_config`
- Highly recommended: Git and/or github for version control

Official docs:

[https://docs.ansible.com/ansible/intro\\_installation.html](https://docs.ansible.com/ansible/intro_installation.html)

# Get set, Installation options



Options:

1. use your laptop, easy if you run Mac or Linux
2. install and use a local virtual machine, like Kali Linux and use graphical editor like leafpad for playbooks
3. you also need Git installed

We will use:

```
git clone https://github.com/kramse/ansible-workshop
```

A goal is also to work in team on a server!

**We will not do this workshop now in this course**

# Install Ansible on Mac and Ubuntu Linux clients



Official instructions!

[http://docs.ansible.com/ansible/latest/intro\\_installation.html](http://docs.ansible.com/ansible/latest/intro_installation.html)

- Mac OS X `brew install ansible` or use `pip`

```
$ sudo easy_install pip
```

```
$ sudo pip install ansible
```

- Ubuntu Linux try something like:

```
$ sudo apt-get update
```

```
$ sudo apt-get install software-properties-common
```

```
$ sudo apt-add-repository ppa:ansible/ansible
```

```
$ sudo apt-get update
```

```
$ sudo apt-get install ansible openssh-client
```

Yes, I expect OpenSSH client is also installed :-D

# Kali Linux as Ansible client



The screenshot shows a Kali Linux desktop environment. In the background, a terminal window is open with the following commands and output:

```
root@kali: ~  
File Edit View Search Terminal Help  
root@kali:~# git clone https://github.com/kramse/ansible-workshop  
Cloning into 'ansible-workshop'...  
remote: Counting objects: 88, done.  
remote: Total 88 (delta 0), reused 0 (delta 0), pack-reused 88  
Unpacking objects: 100% (88/88), done.  
root@kali:~# leafpad ansible-workshop/hosts.sitename
```

In the foreground, a text editor window titled "hosts.sitename" is open, displaying the following content:

```
File Edit Search Options Help  
[all:vars]  
ansible_ssh_port=22  
  
[infra]  
#fw-01 ansible_ssh host=10.0.45.254 ansible_ssh_port=22 an  
infra01 ansible_ssh_host=10.0.45.206 ansible_ssh_port=22 a  
#jump01 ansible_ssh_host=10.0.42.xx  
  
[nameservers]  
#nameserver01 ansible_ssh_host=10.0.45.206 ansible_ssh_por  
#nameserver02 ansible_ssh_host=10.0.42.xx ansible_ssh_port  
  
[infrastructure]  
server01     ansible_ssh_host=10.0.45.191  
server02     ansible_ssh_host=10.0.45.199  
server03     ansible_ssh_host=10.0.45.197  
server04     ansible_ssh_host=10.0.45.190
```

# Install python on servers



You can use Kali as a client, no problem

- Debian or Ubuntu server: `apt install python openssh-server`
- OpenBSD: `pkg_add python` (already has OpenSSH server)

# Create OpenSSH compatible private / public key pair



```
hlk@generic:~$ ssh-keygen -f .ssh/kramse
Generating public/private rsa key pair.
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in .ssh/kramse.
Your public key has been saved in .ssh/kramse.pub.
The key fingerprint is:
SHA256:chCjaP6BHaoPy/EMDlP6xKAP4aGAX2mknGA/ZoAzU3o hlk@generic
The key's randomart image is:
+---[RSA 2048]-----+
|  .  o              |
|.o . . o           |
|BoE + .            |
|oXoB o .           |
|=.O=* . S          |
|=O++.. o           |
|X++ .              |
|+X=                 |
|.o+o                |
+-----[SHA256]-----+
```

/home/hlk/.ssh/kramse.pub is the public key in this example

## SSH utility ssh-copy-id



You need to copy your SSH public key to the server to use SSH+Ansible:

```
h1k@kunoichi:h1k$ ssh-copy-id -i .ssh/kramse h1k@10.0.42.147
/usr/local/bin/ssh-copy-id: INFO: Source of key(s) to be installed: ".ssh/kramse.pub"
The authenticity of host '10.0.42.147 (10.0.42.147)' can't be established.
ECDSA key fingerprint is SHA256:DP6jqadDWEJW/3FY8PY84cpTKmEW7XoQ4zDNf/RdTu6M.
Are you sure you want to continue connecting (yes/no)? yes
/usr/local/bin/ssh-copy-id: INFO: attempting to log in with the new key(s),
to filter out any that are already installed
/usr/local/bin/ssh-copy-id: INFO: 1 key(s) remain to be installed -- if you
are prompted now it is to install the new keys
h1k@10.0.42.147's password:
```

```
Number of key(s) added:      1
```

Now try logging into the machine, with: `"ssh -o 'IdentitiesOnly yes' 'h1k@10.0.42.147'"`  
and check to make sure that only the key(s) you wanted were added.

This is the best tool for the job!



## Exercise: trying Ansible



Create inventory file, and then:

```
ansible -m ping new-server
ansible -a "date" new-server
ansible -m shell -a "grep a /etc/something" new-server
```

Lets try running Ansible!

- Hopefully there is a small getting started repo to clone from Github 😊
- Install software: ansible and openssh-client
- Generate SSH key pair - see previous slides
- Server to use should be shown on the whiteboard (or similar)
- You can override user with `ansible -u manager`  
very useful if you are bringing up a server from PXE boot using predefined user manager
- Trouble? Try running with `-vvv`, try manual ssh, is Python installed on server and ready?

## Success looks something like this



```
$ ssh-keygen -f .ssh/kramse
... generates key pair and saves public key in .ssh/kramse.pub
$ ssh-copy-id -i .ssh/kramse manager@10.0.42.147
... asks for password "henrik42" and installs key
$ cd ansible-workshop
$ leafpad hosts.sitename # add the host server01 for your group

$ ansible -i hosts.sitename -u manager -m ping server01
server01 | success >> {
    "changed": false,
    "ping": "pong"
}
```

Congratulations you are now running Ansible!

## Exercise: try fetching facts



```
$ ansible -i hosts.cph1 -u manager -m setup server01 | grep hostname
    "ansible_hostname": "cph1-fw-cph1-01",
```

- Facts are fetched by default from servers
- Can be fetched / investigated using the setup module
- Returns JSON
- Try saving the output in a file and look at it:

```
ansible -i hosts.cph1 -u manager -m setup server01 > facts.txt
less facts.txt
```

Goal is to learn basics of Ansible by seeing some server facts

## Exercise: try adding you own user



---

```
- hosts: all:!*openbsd*
  become: true
  serial: 10
tasks:
  - group: name=yourusername state=present
  - user: name=yourusername shell=/bin/bash group=sudo
```

- Copy above or edit the create-user.yml
  - Replace "hlk" with your username, the one you want
  - Run this task / playbook so your own user is created
- ```
ansible-playbook -i hosts.sitename -K -u manager create-user.yml
```
- Dont forget to install your key on this user!
  - Try running multiple times, and try adding check and diff:

```
ansible-playbook -i hosts.sitename -K -u yourusername create-user.yml --check --diff
```

Congratulations: you can now do real work with Ansible!

## Monitor your network



MRTG The Multi Router Traffic Grapher - simple, great, fast

<http://oss.oetiker.ch/mrtg/>

Smokeping Network Latency measurements - network quality

<http://oss.oetiker.ch/smokeping/>

NFsen Netflow monitoring - turn on at selected routers/switches

LibreNMS <https://www.librenms.org/>

Prometheus <https://prometheus.io/> & Grafana <https://grafana.com/> Generic tools that can also be used


Manual tools, My Traceroute, Nping

# MRTG SNMP monitoring made easy




## Routers in Luxembourg

Traffic Analysis for xe-0/0/3 -- mx-lux-01 Global Crossing

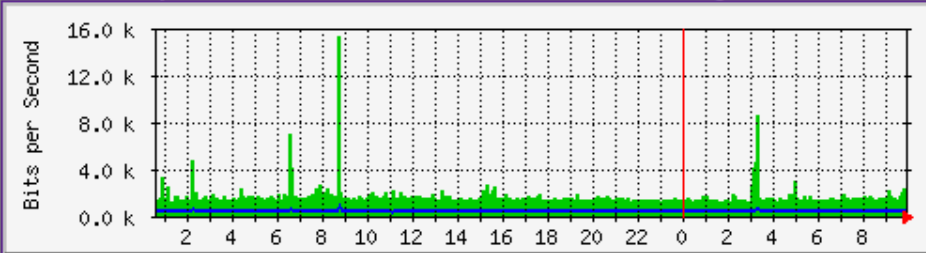


Traffic Analysis for xe-0/0/1 -- mx-lux-01 link to MX2

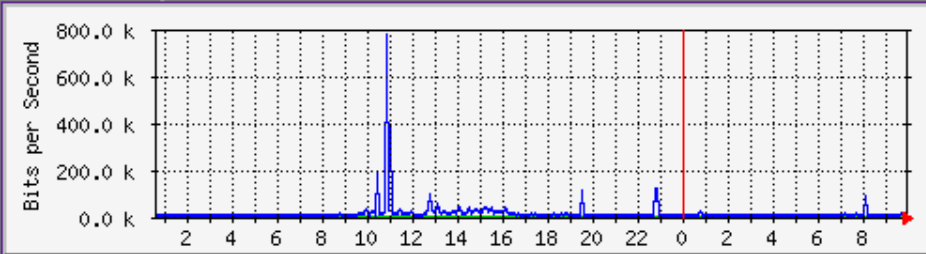

Run configmaker, indexmaker - almost done

# Smokeping packet loss

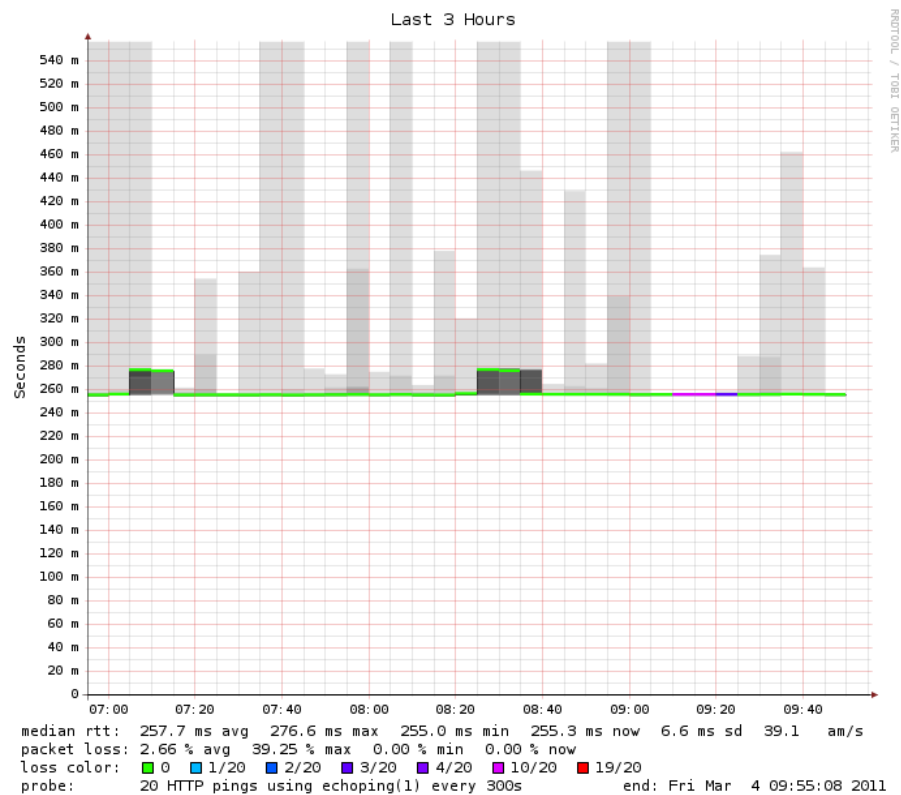

# Smokeping latency changed







Netflow is getting more important, more data share the same links

Accounting is important

Detecting DoS/DDoS and problems is essential

Netflow sampling is vital information - 123Mbit, but what kind of traffic

We use mostly NFSen, but are looking at various software packages <http://nfsen.sourceforge.net/>

Currently also investigating sFlow - hopefully more fine grained



# Netflow processing from the web interface



NetFlow Processing

Source: peer1 peer2 gateway site upstream  
Filter: and <none>

Options:  
List Flows Stat TopN  
Top: 10  
Stat: Flow Records order by flows  
Aggregate: proto srcPort dstPort  
Limit: Packets > 0  
Output: line / IPv6 long

Clear Form process



























```
** nfdump -M /netflow0/nfsen-demo/profile-data/live/peer1:peer2:gateway:site:upstream -T -r 2007/05/31/04/nfcapd.200705310440
nfdump filter:
any
Aggregated flows 2797250
Top 10 flows ordered by flows:
Date flow start      Duration Proto   Src IP Addr:Port    Dst IP Addr:Port    Packets  Bytes  Flows
2007-05-31 04:39:54.045 299.034 UDP     116.147.95.88:1110  188.142.64.162:27014 68       5508   68
2007-05-31 04:39:56.282 298.174 UDP     116.147.249.27:1478 188.142.64.163:27014 67       5427   67
2007-05-31 04:39:57.530 298.206 UDP     117.196.44.62:1031  188.142.64.166:27014 67       5427   67
2007-05-31 04:39:57.819 298.112 UDP     117.196.75.134:1146 188.142.64.167:27014 67       5427   67
2007-05-31 04:39:53.787 297.216 UDP     61.191.235.132:4121 60.9.138.37:2121    62       3720   62
2007-05-31 04:39:55.354 300.833 UDP     60.9.138.37:2121    118.25.93.95:2121   61       3660   61
2007-05-31 04:39:58.936 298.977 UDP     60.9.138.36:2121    119.182.123.166:2121 61       3660   61
2007-05-31 04:39:54.329 303.585 UDP     120.150.194.76:2121 60.9.138.37:2121    61       3660   61
2007-05-31 04:39:53.916 300.734 UDP     60.9.138.37:2121    125.167.25.128:2121 61       3660   61
2007-05-31 04:39:57.946 300.353 UDP     60.9.138.36:2121    121.135.4.186:2121  61       3660   61

IP addresses anonymized
Summary: total flows: 4616424, total bytes: 156.6 G, total packets: 172.6 M, avg bps: 644.8 M, avg pps: 90946, avg bpps: 929
Time window: 2007-05-31 04:11:49 - 2007-05-31 04:44:58
Total flows processed: 4616424, skipped: 0, Bytes read: 240064932
Sys: 6.184s flows/second: 746464.4 Wall: 6.185s flows/second: 746361.3
```

Bringing the power of the command line forward


# LibreNMS Automatic discovery




| LibreNMS                                                                                                               |                                     |                                                                                                                                                                               |                                 |                                           |  |
|------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-------------------------------------------|--|
| Overview Devices Ports Health Wireless Alerts                                                                          |                                     |                                                                                                                                                                               |                                 |                                           |  |
| Lists: Basic   Detail   Graphs: Bits   CPU   Load   Memory   Uptime   Storage   Disk I/O   Poller   Ping   Temperature |                                     |                                                                                                                                                                               |                                 |                                           |  |
| Search All OSes All Versions All Platforms All Featuresets                                                             |                                     |                                                                                                                                                                               |                                 |                                           |  |
| Vendor                                                                                                                 | Device                              | Metrics                                                                                                                                                                       | Platform                        | Operating System                          |  |
|                                       | <b>192.168.0.254</b><br>zw-zd3k-001 |  7<br> 2    | zd3025                          | Ruckus Wireless<br>10.1.1.0 build 42 (DK) |  |
|                                       | <b>born-core-01</b>                 |  102<br> 13 | Juniper EX3300                  | Juniper JunOS<br>15.1R2.9                 |  |
|                                       | <b>noctent1</b><br>noc-tent         |  29<br> 3   | Brocade ICX 6430 24-port Switch | Brocade IronWare                          |  |
|                                       | <b>north1</b><br>north1             |  25                                                                                          |                                 | Foundry Networking                        |  |
|                                       | <b>south1</b><br>south1             |  25<br> 4   | snFWS624GSwitch                 | Brocade IronWare                          |  |
|                                       | <b>south2</b><br>south2             |  29<br> 3   | Brocade ICX 6430 24-port Switch | Brocade IronWare                          |  |
|                                       | <b>south3</b><br>south3             |  49                                                                                          |                                 | Foundry Networking                        |  |
|                                       | <b>southwest1</b><br>southwest1     |  49                                                                                          |                                 | Foundry Networking                        |  |
|                                       | <b>west1</b><br>west1               |  25<br> 4   | snFWS624GSwitch                 | Brocade IronWare                          |  |
|                                       | <b>west2</b><br>west2               |  25                                                                                          |                                 | Foundry Networking                        |  |

Automatically discover your entire network using CDP, FDP, LLDP, OSPF, BGP, SNMP and ARP.


# LibreNMS Geo Location

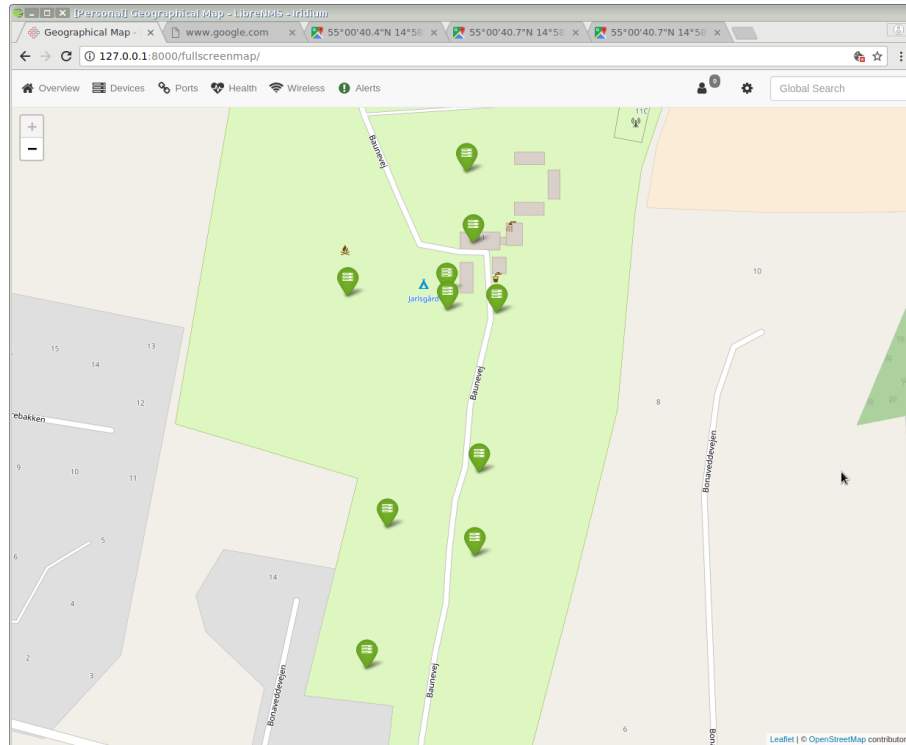

# LibreNMS wireless clients

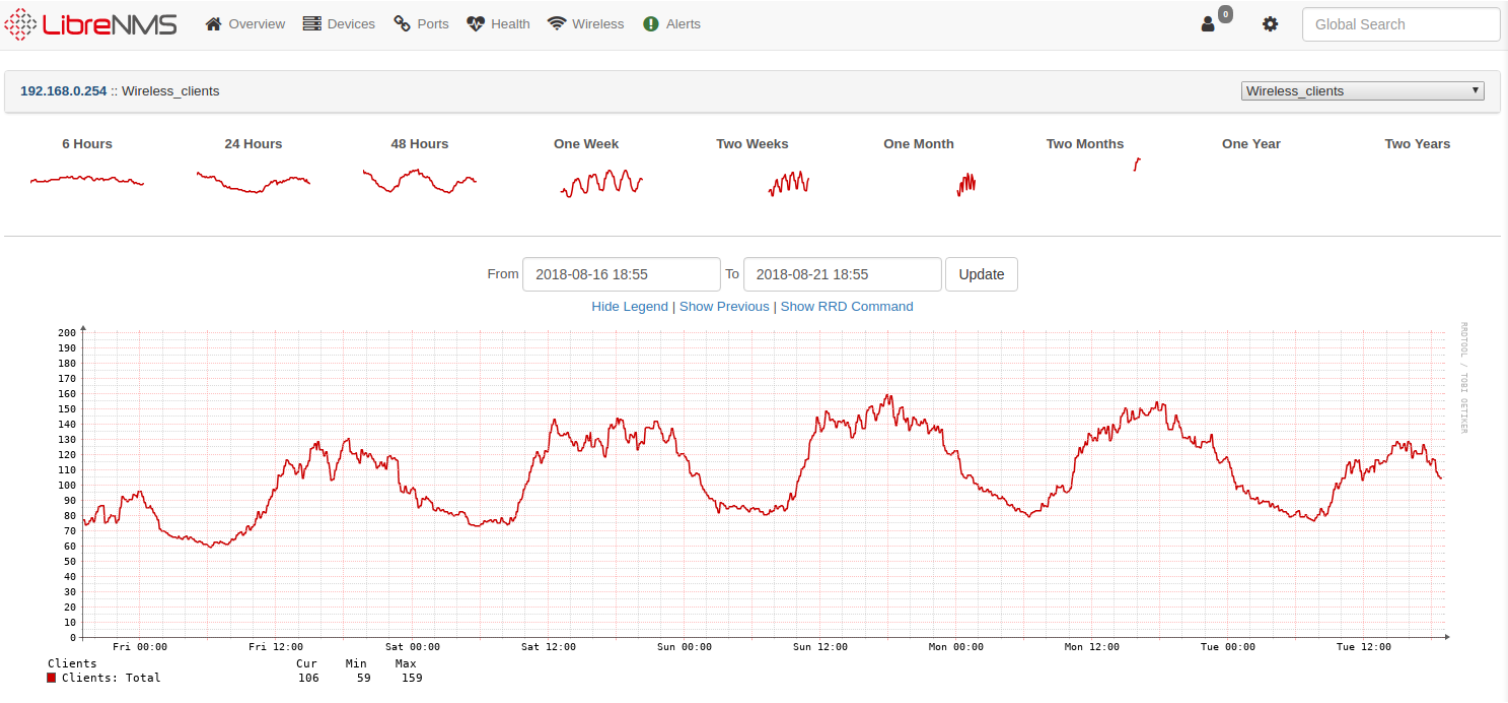

## For Next Time



Think about the subjects from this time, write down questions

Check the plan for chapters to read in the books

Visit web sites and download papers if needed

Retry the exercises to get more confident using the tools