


E18 F60 (V1-V2-V3)



E18 F77



E21 F60 (VC-V2)

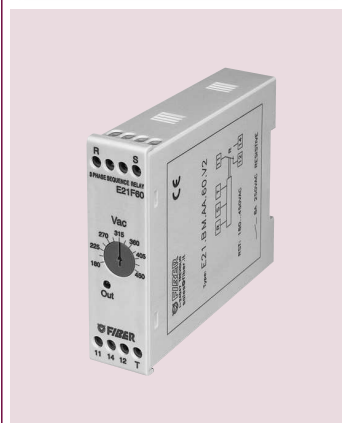

Specifications

Single-voltage		•	
Multi-voltage	•		•
Single-frequency (50 Hz or 60 Hz)		•	
Dual-frequency (50 Hz and 60 Hz)	•	•	•
Undervoltage / single phase		•	
Functions:			
Voltage monitoring		•	
Current monitoring			
Two-hand control			
Phase sequence / failure	•		•
Phase sequence / unbalance	•		
Overall dimensions:	17.5 x 89 x 61.5	17.5 x 89 x 61.5	22.5 x 78.5 x 101.5
Mounting:			
35 mm DIN rail (EN50022)	•	•	•
screws fixing			
Technical data page	2.5 + 2.7	2.8	2.9 + 2.10

E55 F55



E55 F61



E55 F63



45 x 73 x 109	45 x 73 x 111	45 x 73 x 109
2.11	2.12	2.13