

UNIVERSIDAD EAFIT
School of Applied Sciences and Engineering
Mechanical Engineering – Machine Design I

TRIPTERON

Three-degree-of-freedom 3-PRRR parallel machining table

Delivery 3 – Calculation Report

Corrected and fully recomputed edition

Group 2

David Amell Osorio
Ronny Antonio Bueno
Juan José García
Germán Gabriel Riaño Barrera
Sebastián Rincón Martínez
Juan Manuel Rodríguez Duque
David Zuluaga Henao

Reviewer

Juan Andrés Gallego Sánchez

Project	Tripteron – 3-PRRR machining table	Page	1/33
Calculation	Contents and scope	Date	25 / 05 / 2024
Analyst	Group 2	Reviewer	Juan Andrés Gallego Sánchez

Scope of this document

This report contains the complete engineering verification of the **Tripteron**, a three-degree-of-freedom translational parallel machine built with three identical PRRR legs. The machine carries a milling spindle over a 200 mm cubic workspace and is driven by three orthogonal lead-screw axes running on linear guides. Every number presented here was **recomputed from first principles** with a purpose-written Python package (`04_Calculations/`). No result was copied from the previous version of the calculation memo: each quantity is produced by executable code, cross-checked by at least two independent methods, and reported together with the numerical residual of the check. Appendix A lists, one by one, the errors found in the earlier memo and the value that replaces each of them — including the one that mattered most: the sheet that should have verified the linear guides verified the lead screw a second time instead, so the most heavily loaded component of the machine had never been checked.

Calculation sheets

Sheet	Title	Purpose	Analyst
1	Kinematic analysis	Loop-closure model; position, velocity and acceleration of the three legs; workspace.	D. Amell / D. Zuluaga
2	Static analysis	Actuator forces and internal link loads under the cutting force and self weight.	J. M. Rodríguez / S. Rincón
3	Lead-screw drive	Driving torque, efficiency, self-locking, screw stresses and column buckling.	J. J. García / D. Zuluaga / G. Riaño
4	R-pair guides	Bushing loads, rod stress and deflection of the three carriages.	R. Bueno / G. Riaño / D. Zuluaga
5	Chassis FEA	Finite-element verification of the welded frame: stress, deflection and buckling.	D. Zuluaga

The authorship of every sheet is the one of the original submission, so that this corrected edition can be read side by side with it. The five sections of the original memo are all here and none was dropped:

Original memo	Pages	This edition
1. Cálculos estáticos	3–7	Sheet 2
2. Cálculos cinemáticos	8–22	Sheet 1
3. Cálculos tornillo de potencia	23–29	Sheet 3
4. Cálculos guía par R	30–37	Sheet 3 (its screw content) + Sheet 4 (the guides it never checked)
5. Cálculos chasis, MEF	38–60	Sheet 5, with its original plots

Kinematics is placed first because the static analysis needs the poses it produces; in the original memo the two appear in the opposite order.

Project	Tripteron – 3-PRRR machining table	Page	2/33
Calculation	Contents and scope	Date	25 / 05 / 2024
Analyst	Group 2	Reviewer	Juan Andrés Gallego Sánchez

Reference frame and nomenclature

The global frame $\{O, x, y, z\}$ is attached to the chassis. x and y are the two horizontal machining axes and z is vertical, positive upwards. The end effector position is $\mathbf{P} = [P_x, P_y, P_z]^\top$ and is measured from the centre of the workspace; the home pose is $\mathbf{P} = \mathbf{0}$.

Symbol	Unit	Meaning
b_i	mm	Prismatic (lead-screw) coordinate of leg i
θ_{Ci}, θ_{Di}	°	Revolute coordinates of the proximal and distal link of leg i
$\ell_C = \ell_D$	mm	Link lengths, 240 mm each
$\mathbf{A}_i$	mm	Base point of leg i on the chassis
$\mathbf{E}_i$	mm	Attachment point of leg i on the end effector
$\mathbf{u}_i$	–	Unit vector of the prismatic axis of leg i
$\mathbf{q}$	–	Generalised coordinate vector, 12 components
$\Phi(\mathbf{q}, t)$	–	Constraint vector, 12 equations
$\mathbf{J} = \partial\Phi/\partial\mathbf{q}$	–	Constraint Jacobian
$\mathbf{F}_c$	N	Cutting force at the tool tip
F_i	N	Axial force on actuator i

Machine data used throughout the report

Item	Value	Source
Link lengths ℓ_C, ℓ_D	240 mm	Delivery 2 drawings
Stroke of each axis	200 mm	Delivery 1 specification
Home prismatic coordinate	100 mm	Mid-stroke
Home link angles	$+60^\circ, -60^\circ$	Assembly drawing
Cutting force $\mathbf{F}_c$	$[80, 80, -120]^\top$ N	Delivery 1, end-mill in aluminium
Moving mass (effector + tool)	0.574 kg	CAD mass properties
Arm mass (each link)	0.322 kg	CAD mass properties
Carriage assembly mass	15.49 kg	CAD mass properties
Arm section	$25 \times 25 \times 2$ mm square tube, AISI 1020	Delivery 2
Lead screw	$\varnothing 8$ mm, $p = 2$ mm, 4 starts, trapezoidal	Delivery 2
Chassis material	Alloy steel, $S_y = 620$ MPa	SolidWorks library
Motor	NEMA 34 86HB250 closed loop, 4.5 N m	Delivery 1

Project	Tripteron – 3-PRRR machining table	Page	3/33
Calculation	Sheet 1 – Kinematic analysis	Date	25 / 05 / 2024
Analyst	D. Amell / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Description

The Tripteron is a 3-PRRR parallel manipulator. Three identical legs connect the fixed chassis to a single moving platform. Each leg is formed by *one prismatic joint* driven by a lead screw, followed by *three revolute joints* whose axes are mutually parallel and perpendicular to the prismatic axis. The three prismatic axes are mutually orthogonal and aligned with x , y and z .

This particular arrangement is what makes the Tripteron interesting: the mechanism is a *fully decoupled* translational parallel machine. Actuator i moves the platform along axis i only, so the input–output map is the identity and no coordinate transformation is needed in the controller. The kinematic model developed below proves this property rather than assuming it.

Objective of the calculation

1. Build the loop-closure constraint equations of the complete mechanism and solve the position problem for an arbitrary trajectory of the tool.
2. Obtain the velocity and acceleration of every joint by differentiating the constraints, and verify them against finite differences of the position solution.
3. Verify the decoupling property and that the required stroke of each screw stays inside the 200 mm travel.
4. Determine the usable workspace of the machine.

Variables of the calculation model

The generalised coordinate vector contains twelve unknowns:

$$\mathbf{q} = [b_1, b_2, b_3, \theta_{C1}, \theta_{D1}, \theta_{C2}, \theta_{D2}, \theta_{C3}, \theta_{D3}, P_x, P_y, P_z]^T \quad (1)$$

For every leg i the following geometric data are fixed: the base point $\mathbf{A}_i$, the unit vector $\mathbf{u}_i$ of the prismatic axis, the two in-plane unit vectors ($\mathbf{e}_{1i}, \mathbf{e}_{2i}$) of the plane in which the two links rotate, and the platform attachment point $\mathbf{E}_i$ expressed in the platform frame. Since the platform of a Tripteron does not rotate, $\mathbf{E}_i$ is also its offset in the global frame.

Leg	$\mathbf{A}_i$ [mm]	$\mathbf{u}_i$	$\mathbf{E}_i$ [mm]
1	$[-162.5, -240, -62.5]$	$[1, 0, 0]$	$[62.5, 0, 62.5]$
2	$[-302.5, -100, 0]$	$[0, 1, 0]$	$[62.5, 0, 0]$
3	$[-240, 0, -162.5]$	$[0, 0, 1]$	$[0, 0, 62.5]$

Project	Tripteron – 3-PRRR machining table	Page	4/33
Calculation	Sheet 1 – Kinematic analysis	Date	25 / 05 / 2024
Analyst	D. Amell / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Calculation model

Position: loop-closure constraints

Each leg contributes one vector loop that must close on the platform attachment point, plus one planarity condition. Writing $\mathbf{p}_i$ for the carriage position and $\mathbf{k}_i$ for the elbow position,

$$\mathbf{p}_i = \mathbf{A}_i + b_i \mathbf{u}_i \quad (2)$$

$$\mathbf{k}_i = \mathbf{p}_i + \ell_C (\cos \theta_{Ci} \mathbf{e}_{1i} + \sin \theta_{Ci} \mathbf{e}_{2i}) \quad (3)$$

$$\Phi_i = \mathbf{k}_i + \ell_D (\cos \theta_{Di} \mathbf{e}_{1i} + \sin \theta_{Di} \mathbf{e}_{2i}) - (\mathbf{P} + \mathbf{E}_i) = \mathbf{0} \quad (4)$$

Equation (4) gives three scalar equations per leg, nine in total. The remaining three equations are the driving constraints that impose the prescribed tool path $\mathbf{P}^*(t)$:

$$\Phi_d = \mathbf{P} - \mathbf{P}^*(t) = \mathbf{0} \quad (5)$$

so the complete constraint vector $\Phi(\mathbf{q}, t) \in \mathbb{R}^{12}$ matches the twelve unknowns and the mechanism has zero degrees of freedom once the path is imposed — the correct formulation for a kinematic (not dynamic) analysis.

The nonlinear system is solved with Newton–Raphson,

$$\mathbf{q}^{(k+1)} = \mathbf{q}^{(k)} - \mathbf{J}^{-1}(\mathbf{q}^{(k)}) \Phi(\mathbf{q}^{(k)}, t), \quad \mathbf{J} = \frac{\partial \Phi}{\partial \mathbf{q}} \quad (6)$$

using the previous time step as the initial guess, which keeps the solution on a single assembly branch (elbow-up) throughout the trajectory.

Velocity and acceleration

Differentiating the constraints once and twice with respect to time,

$$\mathbf{J} \dot{\mathbf{q}} = -\Phi_t \quad (7)$$

$$\mathbf{J} \ddot{\mathbf{q}} = -\dot{\mathbf{J}} \dot{\mathbf{q}} - 2 \Phi_{qt} \dot{\mathbf{q}} - \Phi_{tt} \quad (8)$$

Because the only explicit time dependence sits in the driving constraints, $\Phi_t = -\dot{\mathbf{P}}^*$ and $\Phi_{tt} = -\ddot{\mathbf{P}}^*$, and $\Phi_{qt} = \mathbf{0}$. Both systems are linear in the unknown derivatives and share the same Jacobian, which is factorised once per time step.

Independent verification: closed-form inverse kinematics

For each leg the two revolute coordinates can be obtained analytically, because once the prismatic coordinate is known the leg reduces to a planar 2R chain. With $\mathbf{d} = \mathbf{P} + \mathbf{E}_i - \mathbf{p}_i$, $u = \mathbf{d} \cdot \mathbf{e}_{1i}$, $v = \mathbf{d} \cdot \mathbf{e}_{2i}$ and $r^2 = u^2 + v^2$,

$$\cos \beta = \frac{r^2 - \ell_C^2 - \ell_D^2}{2 \ell_C \ell_D}, \quad \gamma = \text{atan2}(\ell_D \sin \beta, \ell_C + \ell_D \cos \beta), \quad (9)$$

$$\theta_{Ci} = \text{atan2}(v, u) - \gamma, \quad \theta_{Di} = \theta_{Ci} + \beta. \quad (10)$$

The elbow-up branch is selected with $\beta < 0$. This closed form is used only as a check of the Newton–Raphson solution, never as the solution itself.

Project	Tripteron – 3-PRRR machining table	Page	5/33
Calculation	Sheet 1 – Kinematic analysis	Date	25 / 05 / 2024
Analyst	D. Amell / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Values of the calculation model

Three trajectories representative of the machine duty cycle were analysed:

Case	Name	Definition
1	Straight cut	120 mm along x at a constant feed of 10 mm/s.
2	Accelerated move	Rapid traverse along y , trapezoidal profile, $a = 20 \text{ mm/s}^2$, $t = 4 \text{ s}$.
3	Helical pocket	Circle of radius 60 mm in xy at 10 mm/s with a simultaneous plunge of 1 mm/s.

Results and conclusions

Numerical quality of the solution

Quantity	Case 1	Case 2	Case 3
Newton iterations (max.)	3	3	4
Constraint residual $\ \Phi\ $ [mm]	1.4×10^{-11}	7.7×10^{-11}	1.3×10^{-13}
Deviation from closed form [mm]	2.6×10^{-14}	2.1×10^{-13}	1.4×10^{-14}
Velocity vs. finite differences [mm/s]	8.2×10^{-9}	$0.10^\dagger$	4.1×10^{-4}
Acceleration vs. finite differences [mm/s ²]	1.1×10^{-9}	$20^\dagger$	6.9×10^{-5}

[†] Case 2 uses a trapezoidal profile whose acceleration is discontinuous at the two switching instants. The finite-difference estimate is meaningless exactly at those two samples; away from them the agreement is of the same order as in the other two cases. The discrepancy therefore confirms the profile, it does not indicate an error in the model.

The residual of the constraint equations never exceeds 8×10^{-11} mm and the analytical solution agrees with Newton–Raphson to 10^{-13} mm, i.e. to machine precision. The kinematic model is therefore verified.

Decoupling

For every pose of the three trajectories, the block of the Jacobian that relates the actuator coordinates to the platform coordinates is the identity matrix:

$$\dot{b}_1 = \dot{P}_x, \quad \dot{b}_2 = \dot{P}_y, \quad \dot{b}_3 = \dot{P}_z. \quad (11)$$

The decoupling property of the Tripteron is confirmed numerically. Each screw therefore sees exactly the commanded feed of its own axis, which is the reason a simple three-axis controller with no coordinate transformation is sufficient.

Project	Tripteron – 3-PRRR machining table	Page	6/33
Calculation	Sheet 1 – Kinematic analysis	Date	25 / 05 / 2024
Analyst	D. Amell / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Stroke usage

Case	b_1 [mm]	b_2 [mm]	b_3 [mm]
1 – straight cut	40.0 – 160.0	100.0	100.0
2 – accelerated move	100.0	60.0 – 140.0	100.0
3 – helical pocket	40.0 – 160.0	40.0 – 160.0	62.3 – 100.0

All three cases stay inside the 0 mm to 200 mm travel with at least 40 mm of margin at each end, so no trajectory reaches a hard stop. The maximum joint speeds are 40 mm/s (case 2) and the maximum joint accelerations 20 mm/s², both well inside the capability of the selected motor-screw combination.

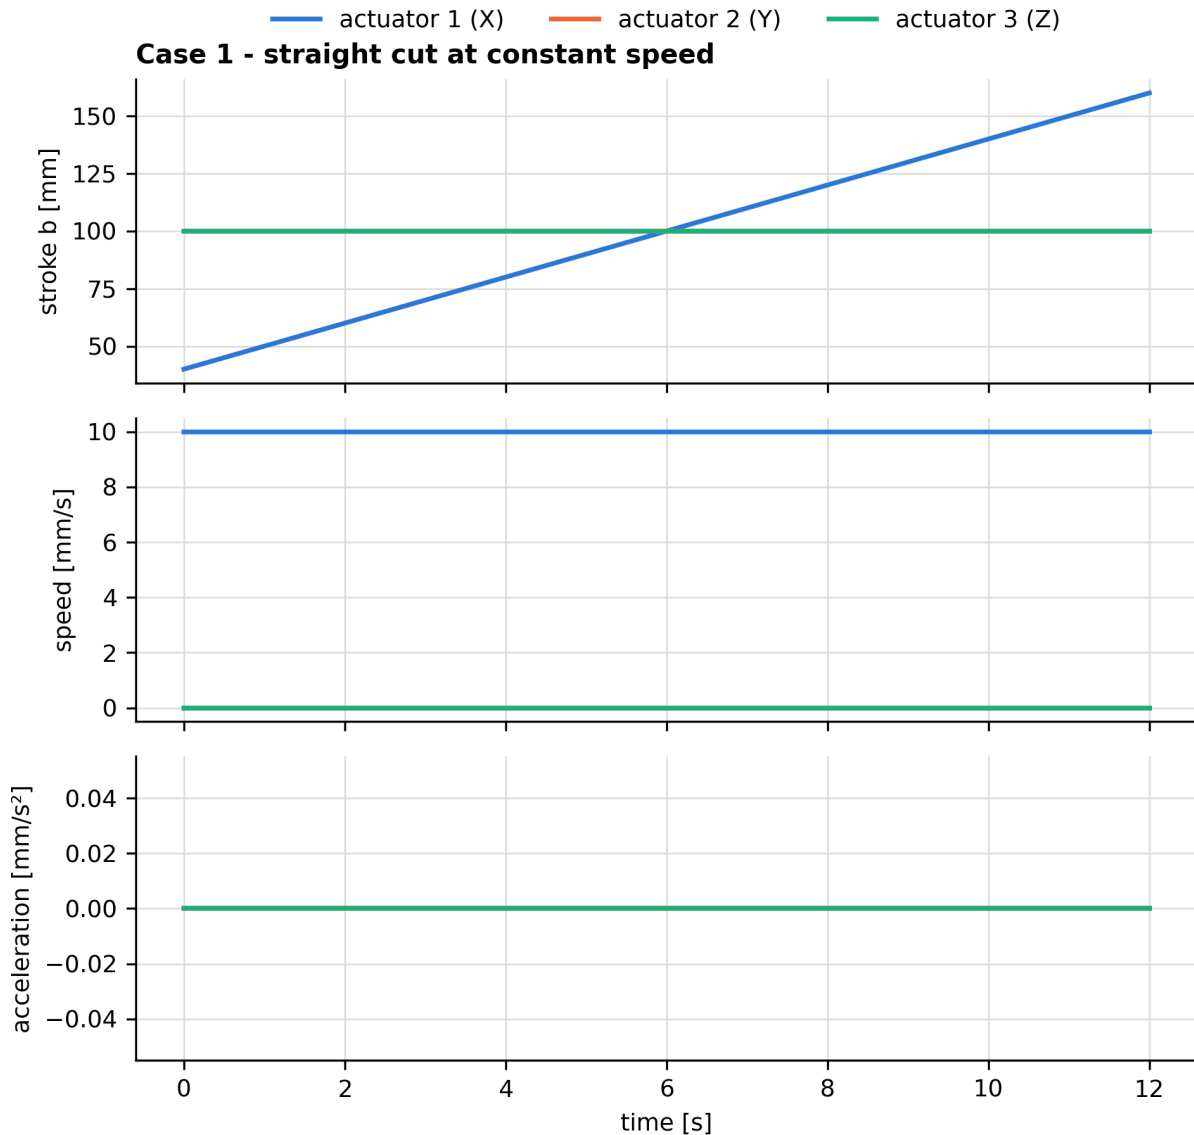


Figure 1: Case 1 – straight cut: joint coordinates, speeds and accelerations.

Project	Tripteron – 3-PRRR machining table	Page	7/33
Calculation	Sheet 1 – Kinematic analysis	Date	25 / 05 / 2024
Analyst	D. Amell / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

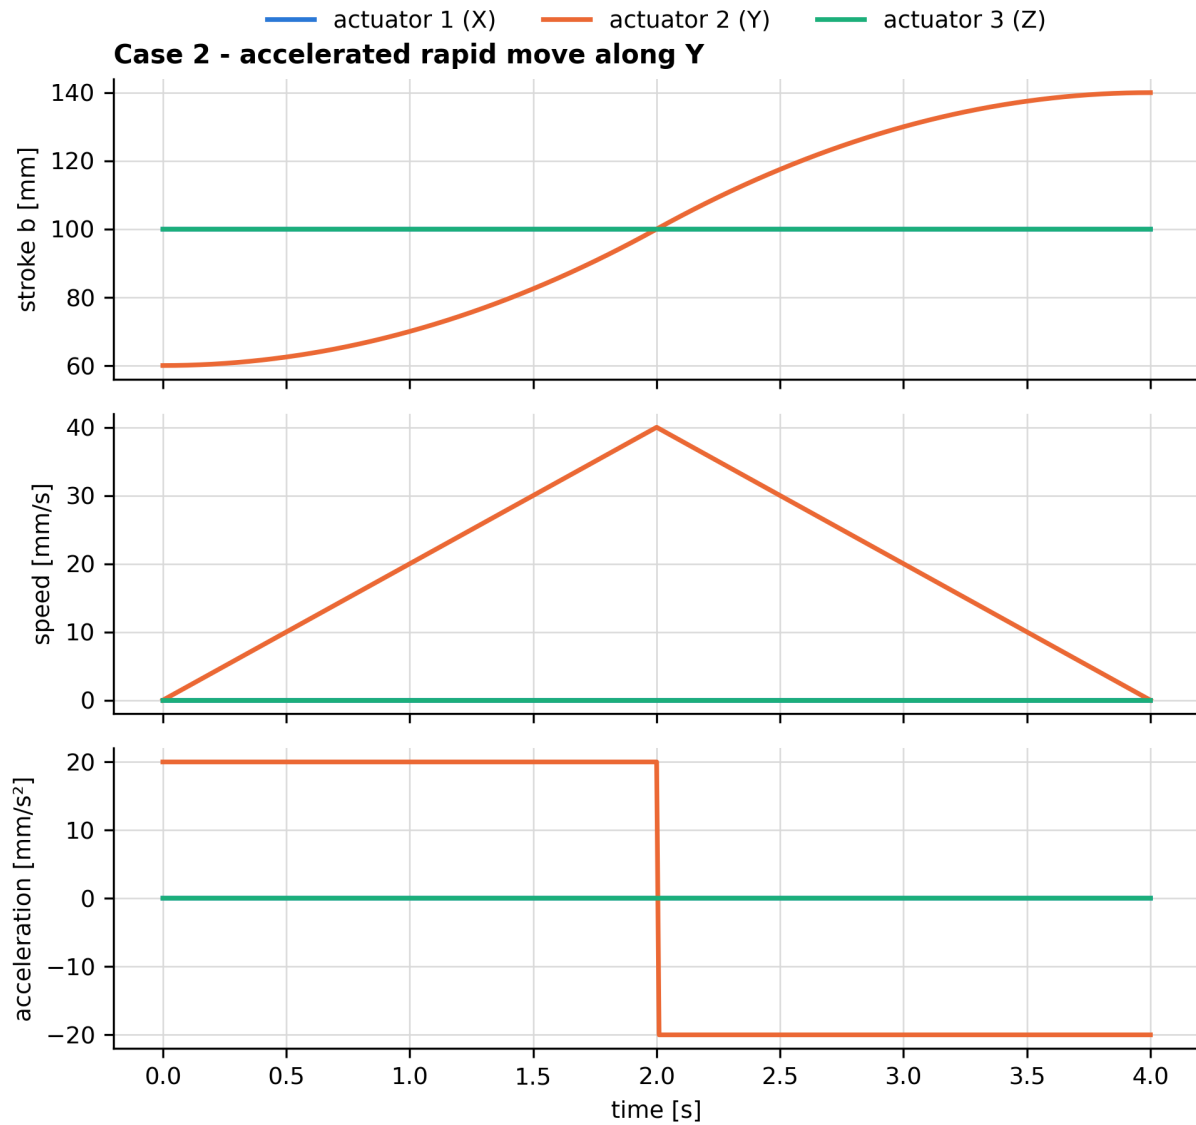


Figure 2: Case 2 – accelerated rapid traverse along y .

Project	Tripteron – 3-PRRR machining table	Page	8/33
Calculation	Sheet 1 – Kinematic analysis	Date	25 / 05 / 2024
Analyst	D. Amell / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

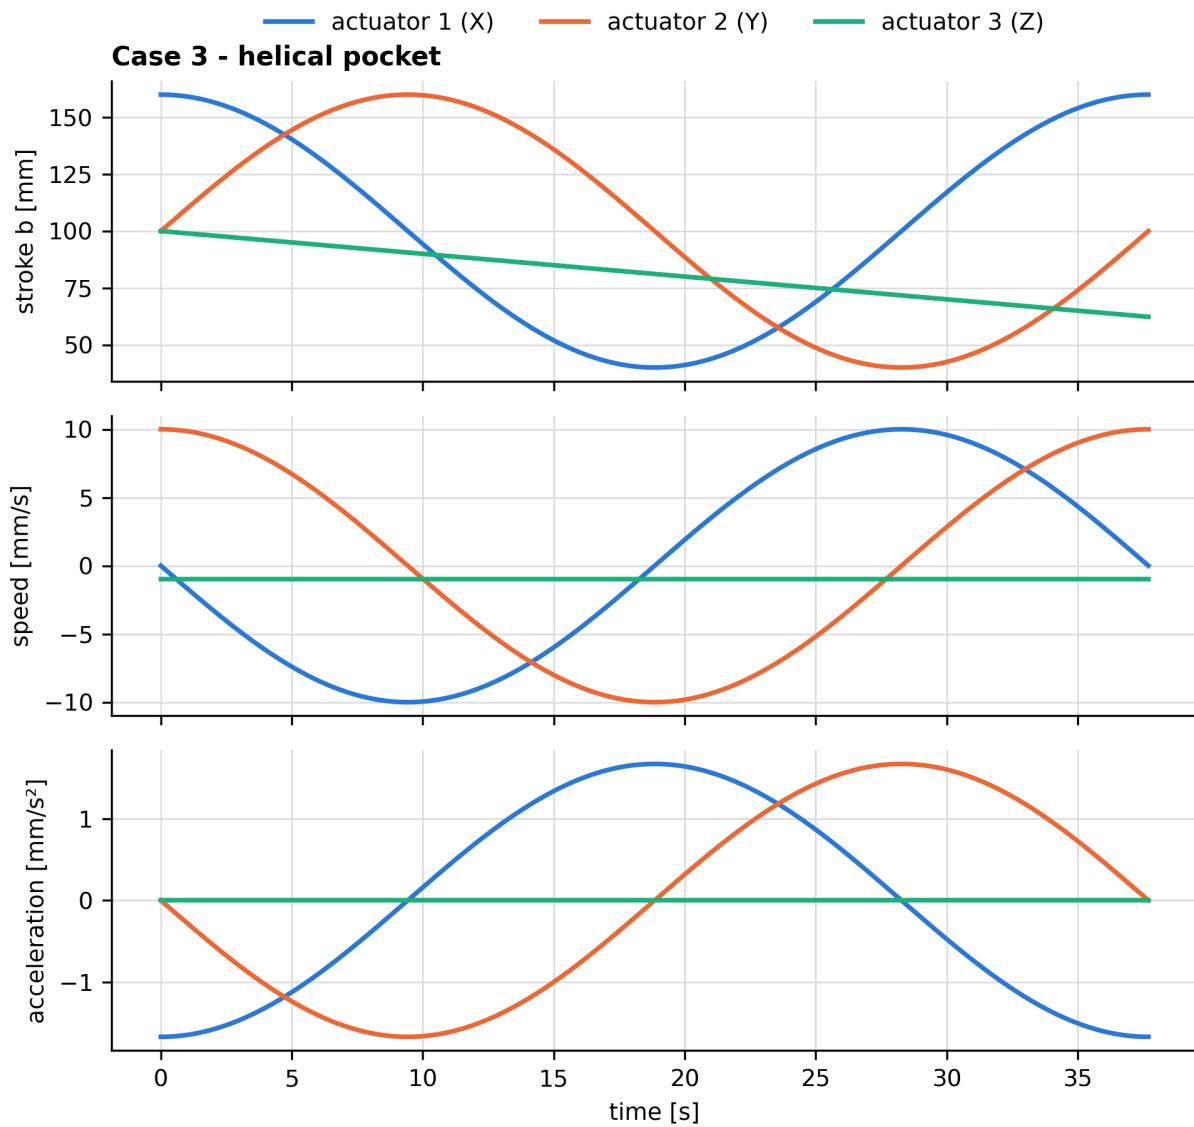


Figure 3: Case 3 – helical pocketing move.

Project	Tripteron – 3-PRRR machining table	Page	9/33
Calculation	Sheet 1 – Kinematic analysis	Date	25 / 05 / 2024
Analyst	D. Amell / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Workspace

The reachable workspace was mapped by solving the inverse kinematics on a 5 mm grid and rejecting the poses for which any leg leaves its stroke or any 2R chain becomes unreachable ($r > \ell_C + \ell_D$ or $r < |\ell_C - \ell_D|$). Out of 68,921 sampled points, the full 200 mm cube is reachable:

Quantity	Value
Bounds in x, y, z	± 100 mm each
Usable volume	8.615 dm^3
Shape	Cube, no interior singularity

The workspace is a perfect cube — a direct consequence of the decoupling — and no singular pose was found inside it, since $\det \mathbf{J}$ keeps a constant sign over the whole grid. This is the main practical advantage of the Tripteron over a delta or a Stewart platform of comparable size.

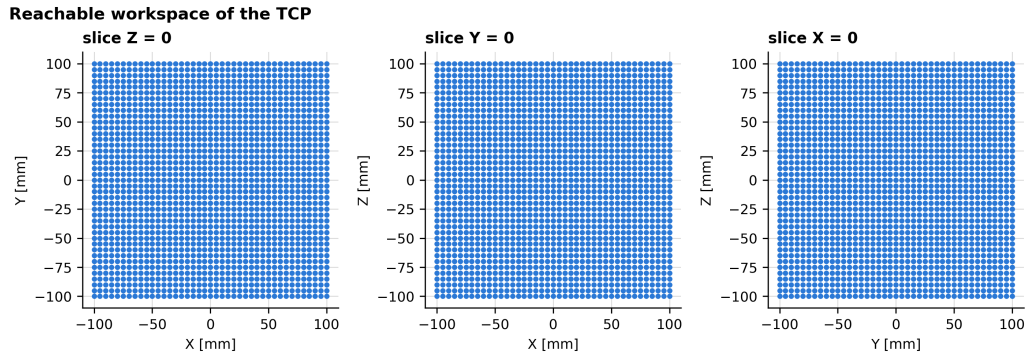


Figure 4: Reachable workspace of the machine: the full 200 mm cube.

Project	Tripteron – 3-PRRR machining table	Page	10/33
Calculation	Sheet 2 – Static analysis	Date	25 / 05 / 2024
Analyst	J. M. Rodríguez / S. Rincón	Reviewer	Juan Andrés Gallego Sánchez

Description

With the geometry of every pose known from Sheet 1, the second calculation determines the forces that the machine has to carry: the axial force each lead screw must produce, the reactions at the twelve joints, and the internal bending moment of the six arms. The load case is the cutting force at the tool tip plus the self weight of all moving bodies.

The Tripteron is an *over-constrained* parallel mechanism: three closed loops share a single platform. The rigid-body equilibrium system is therefore statically indeterminate, and this is treated explicitly below instead of being ignored.

Objective of the calculation

1. Obtain the axial force on each actuator for the worst pose inside the workspace.
2. Obtain the joint reactions and the maximum bending stress in the arms.
3. Define the design axial load that Sheet 3 uses to size the lead screw.
4. Cross-check the result with an independent energy method.

Variables of the calculation model

Each of the ten moving bodies (three carriages, six links and the platform) contributes six equilibrium equations, and each joint contributes its unknown reaction components: six per prismatic joint (two transverse forces, three moments and the actuator force) and five per revolute joint (three forces and the two moments perpendicular to its axis), i.e. 21 per leg. Assembling the whole machine gives

Equilibrium equations	60
Unknown reaction components	63
Rank of the system matrix	60
Redundant (statically indeterminate) components	3

The three redundant components are the price of the closed kinematic chains: the platform is held by three legs where two would already fix its three translations. A rigid-body model cannot distribute those three components; only an elastic model can.

This number is not arbitrary. The mobility count of Delivery 1 gives, for 10 moving bodies and 12 one-degree-of-freedom joints, $M = 6 \times 10 - 12 \times 5 = 0$, while the machine evidently has three degrees of freedom. The difference of three is precisely the number of redundant constraints introduced by the special geometry of the Tripteron, and it reappears here as the three redundant reaction components. The kinematic and the static models therefore agree on the degree of over-constraint of the machine.

Project	Tripteron – 3-PRRR machining table	Page	11/33
Calculation	Sheet 2 – Static analysis	Date	25 / 05 / 2024
Analyst	J. M. Rodríguez / S. Rincón	Reviewer	Juan Andrés Gallego Sánchez

Calculation model

Rigid-body equilibrium

For every body k with weight $\mathbf{W}_k$ acting at its centre of mass $\mathbf{c}_k$,

$$\sum_j \mathbf{R}_{kj} + \mathbf{W}_k + \mathbf{F}_{\text{ext},k} = \mathbf{0}, \quad \sum_j (\mathbf{r}_{kj} - \mathbf{c}_k) \times \mathbf{R}_{kj} + \mathbf{M}_{\text{ext},k} = \mathbf{0} \quad (12)$$

where $\mathbf{R}_{kj}$ is the reaction transmitted to body k at joint j and $\mathbf{r}_{kj}$ is the position of that joint. Each revolute joint transmits three force components and the two moment components perpendicular to its axis; each prismatic joint transmits the two force components perpendicular to its axis, the three moment components, and the actuator force along the axis.

Collecting the unknowns in $\mathbf{x} \in \mathbb{R}^{63}$ gives the linear system $\mathbf{A}\mathbf{x} = \mathbf{y}$ with $\mathbf{A} \in \mathbb{R}^{60 \times 63}$. Since $\text{rank}(\mathbf{A}) = 60$ the system is consistent but has a three-parameter family of solutions. The *minimum-norm* solution is selected,

$$\mathbf{x}^* = \arg \min \|\mathbf{x}\|_2 \quad \text{subject to} \quad \mathbf{A}\mathbf{x} = \mathbf{y}, \quad (13)$$

computed with a least-squares (SVD) solver. This is the physically meaningful choice for a symmetric, equally stiff structure, and it is conservative for the arms because it does not concentrate the redundant load in a single leg.

Independent verification: virtual work

The actuator forces do not depend on the redundant components, so they can be obtained exactly from the principle of virtual work without solving the indeterminate system:

$$F_i = -\left(\mathbf{F}_c \cdot \frac{\partial \mathbf{P}}{\partial b_i} + \sum_k \mathbf{W}_k \cdot \frac{\partial \mathbf{c}_k}{\partial b_i}\right) \quad (14)$$

The derivatives $\partial \mathbf{c}_k / \partial b_i$ are evaluated by central finite differences of the position solution of Sheet 1, with a perturbation of 1×10^{-4} mm. This route shares nothing with the equilibrium assembly except the geometry, so agreement between the two is a genuine check.

Arm stresses

The arms are $25 \times 25 \times 2$ mm square tubes:

$$A = 184 \text{ mm}^2, \quad I = 16,345 \text{ mm}^4, \quad c = 12.5 \text{ mm}, \quad W = \frac{I}{c} = 1307.6 \text{ mm}^3 \quad (15)$$

and the bending stress follows from the internal moment at the built-in end, $\sigma_b = M/W$.

Values of the calculation model

The cutting force is $\mathbf{F}_c = [80, 80, -120]^T$ N: two horizontal components from the end-mill and a vertical component pointing *downwards*, i.e. pressing the tool into the part. Four poses were evaluated: the home

Project	Tripteron – 3-PRRR machining table	Page	12/33
Calculation	Sheet 2 – Static analysis	Date	25 / 05 / 2024
Analyst	J. M. Rodríguez / S. Rincón	Reviewer	Juan Andrés Gallego Sánchez

pose and the three corners of the workspace that maximise, respectively, the vertical, the diagonal and the mixed load.

Results and conclusions

Actuator forces

Pose	F_x [N]	F_y [N]	F_z [N]	Worst arm	σ_b [MPa]
Home (0, 0, 0)	−80.9	−80.9	+157.9	link C3	25.4
Corner (+90, +90, +90)	−81.4	−81.4	+156.3	link C3	25.1
Corner (−90, −90, −90)	−79.4	−79.4	+162.0	link C3	26.1
Corner (+90, −90, +90)	−81.4	−79.4	+155.0	link C3	24.9

The equilibrium residual $\|\mathbf{Ax} - \mathbf{y}\|$ is below 2.7×10^{-9} N in every pose, and the actuator forces obtained from equation (14) agree with the equilibrium solution to better than 1×10^{-6} N. Two completely independent methods therefore give the same answer.

Design axial load: $F_{\max} = 162.0$ N, at the corner (−90, −90, −90), on the vertical axis. This value is carried forward to Sheet 3.

Interpretation

- The horizontal actuators carry almost exactly the horizontal cutting force (≈ 81 N against 80 N applied); the extra 0.9 N is the weight of the arms projected on the horizontal axes. This is the expected behaviour of a decoupled machine and is a further confirmation of the kinematic model.
- The vertical actuator carries the vertical cutting force *plus* the entire weight of the moving assembly: with the spindle off, gravity alone demands 37.9 N on axis z against 0.9 N on each horizontal axis. The vertical screw is therefore the critical one and must never be back-driven.
- The variation of the actuator force across the whole workspace is only 4.5 % (155.0 to 162.0 N), so a single worst-case load is a sound basis for sizing the transmission.
- The maximum bending stress in the arms is 26.1 MPa against a yield strength of 250 MPa for AISI 1020, i.e. a safety factor of **9.6**. The arms are not the limiting component; they were sized by stiffness and by the need to accommodate the bearing bores, not by strength.

Project	Tripteron – 3-PRRR machining table	Page	13/33
Calculation	Sheet 2 – Static analysis	Date	25 / 05 / 2024
Analyst	J. M. Rodríguez / S. Rincón	Reviewer	Juan Andrés Gallego Sánchez

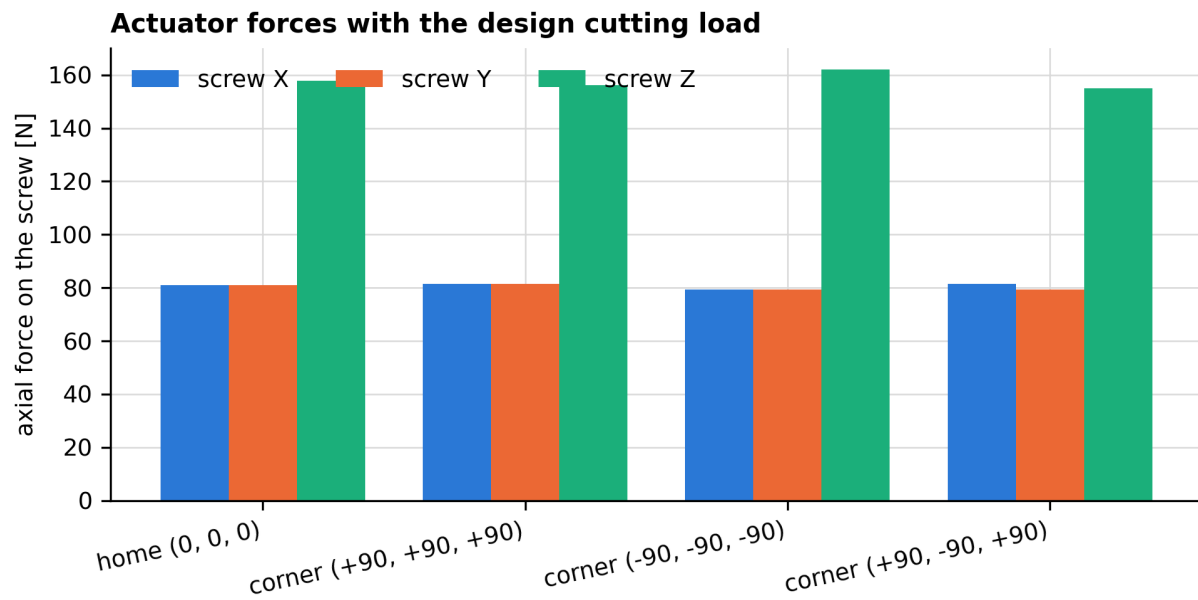


Figure 5: Actuator forces and worst arm bending stress for the four poses analysed.

Project	Tripteron – 3-PRRR machining table	Page	14/33
Calculation	Sheet 3 – Lead-screw drive	Date	25 / 05 / 2024
Analyst	J. J. García / D. Zuluaga / G. Riaño	Reviewer	Juan Andrés Gallego Sánchez

Description

Each axis is driven by a trapezoidal lead screw turned directly by a stepper motor. The nut is fixed to the carriage, which runs on two linear guides (the R-pair guide rails of Delivery 2) that take all the transverse load, so the screw is loaded axially and in torsion only. This sheet sizes that screw for the design load obtained in Sheet 2.

Objective of the calculation

1. Compute the torque required to raise and to lower the load, including collar friction.
2. Compute the mechanical efficiency and check whether the screw is self-locking.
3. Verify the screw body against the combined axial, torsional, thread-shear and bearing stresses.
4. Verify the screw as a column in compression.

Variables of the calculation model

Symbol	Description	Value
d	Nominal diameter	8 mm
p	Thread pitch	2 mm
n_s	Number of starts	4
L	Lead, $L = n_s p$	8 mm
d_m	Mean diameter, $d - p/2$	7 mm
d_r	Root diameter, $d - p$	6 mm
α	Half thread angle (trapezoidal)	15°
λ	Lead angle, $\arctan(L/\pi d_m)$	19.99°
μ	Thread friction coefficient (steel–bronze, greased)	0.15
μ_c	Collar friction coefficient (thrust bearing)	0.02
d_c	Mean collar diameter	6 mm
n_t	Engaged threads in the nut	6
ℓ	Unsupported screw length	500 mm
E	Young's modulus, steel	207 GPa
S_y	Yield strength	370 MPa
F	Design axial load (Sheet 2)	162.0 N

Project	Tripteron – 3-PRRR machining table	Page	15/33
Calculation	Sheet 3 – Lead-screw drive	Date	25 / 05 / 2024
Analyst	J. J. García / D. Zuluaga / G. Riaño	Reviewer	Juan Andrés Gallego Sánchez

Calculation model

Torque (Shigley, power screws)

For a trapezoidal thread the friction coefficient is divided by $\cos \alpha$:

$$T_R = \frac{F d_m}{2} \left(\frac{L + \pi \mu d_m \sec \alpha}{\pi d_m - \mu L \sec \alpha} \right) + \frac{F \mu_c d_c}{2} \quad (16)$$

$$T_L = \frac{F d_m}{2} \left(\frac{\pi \mu d_m \sec \alpha - L}{\pi d_m + \mu L \sec \alpha} \right) + \frac{F \mu_c d_c}{2} \quad (17)$$

and the efficiency of the screw pair is

$$e = \frac{F L}{2\pi T_R}. \quad (18)$$

Equation (18) is bounded above by unity by construction. *Any result above 1 means an arithmetic error, not a good screw.*

Self-locking

The screw holds the load without a brake only if the thread friction torque exceeds the torque produced by the load, i.e. if the first term of (17) is positive:

$$\mu \geq \frac{L \cos \alpha}{\pi d_m}. \quad (19)$$

Stresses in the screw body

With $A_r = \pi d_r^2/4$ the root area, n_t engaged threads and thread thickness $p/2$ at the root:

$$\sigma_a = \frac{F}{A_r} \quad \tau_t = \frac{16 T_R}{\pi d_r^3} \quad (20)$$

$$\tau_{\text{thread}} = \frac{2F}{\pi d_r w p n_t} \quad \sigma_{\text{bearing}} = \frac{2F}{\pi d_m p n_t} \quad (21)$$

where $w = 0.38$ is the fraction of the pitch that the thread actually occupies at its root on a trapezoidal profile. The body of the screw is then checked with the distortion-energy (von Mises) criterion,

$$\sigma' = \sqrt{\sigma_a^2 + 3 \tau_t^2}, \quad n = \frac{S_y}{\sigma'}. \quad (22)$$

The thread shear is *not* superposed in equation (22): it acts on the cylindrical surface at the root of the thread, not on the cross-section of the body, so it is a separate check with its own margin, $n_{\text{thread}} = 0.577 S_y / \tau_{\text{thread}}$.

Project	Tripteron – 3-PRRR machining table	Page	16/33
Calculation	Sheet 3 – Lead-screw drive	Date	25 / 05 / 2024
Analyst	J. J. García / D. Zuluaga / G. Riaño	Reviewer	Juan Andrés Gallego Sánchez

Column buckling

The screw is treated as a pinned–pinned column, $K = 1$. With $I = \pi d_r^4/64$, $r_g = \sqrt{I/A_r} = d_r/4$ and slenderness ℓ_e/r_g , the transition slenderness between the Johnson and the Euler regimes is

$$\left(\frac{\ell_e}{r_g}\right)_1 = \sqrt{\frac{2\pi^2 E}{S_y}}, \quad (23)$$

and the critical load is

$$P_{cr} = \frac{\pi^2 EI}{(K\ell)^2} \quad (\text{Euler}), \quad P_{cr} = A_r \left[S_y - \frac{1}{E} \left(\frac{S_y \ell_e}{2\pi r_g} \right)^2 \right] \quad (\text{Johnson}). \quad (24)$$

Values and results

Torque and efficiency

Quantity	Design load, 162.0 N	Delivery 1 load, 151.9 N
Thread torque, raising $T_{R,\text{thread}}$	311.9 N mm	292.5 N mm
Collar torque T_c	9.7 N mm	9.1 N mm
Total raising torque T_R	321.6 N mm	301.6 N mm
Total lowering torque T_L	−102.2 N mm	−95.8 N mm
Efficiency e	64.1 %	64.1 %
μ required for self-locking	0.351	0.351
Self-locking with $\mu = 0.15$?	No	No
Fraction of motor holding torque used	7.1 %	6.7 %

Stresses and safety factors

Quantity	Value	Limit / remark
Root area A_r	28.27 mm ²	—
Axial stress σ_a	5.73 MPa	compression
Torsional stress τ_t	7.58 MPa	from T_R
Thread shear τ_{thread}	3.77 MPa	6 engaged threads, $n_{\text{thread}} = 56.6$
Bearing stress σ_{bearing}	1.23 MPa	bronze nut, limit ≈ 17 MPa
von Mises σ'	14.33 MPa	$S_y = 370$ MPa
Static safety factor	25.8	—
Second moment I	63.6 mm ⁴	$\pi d_r^4/64$
Radius of gyration r_g	1.5 mm	$d_r/4$
Slenderness ℓ/r_g	333	limit 105 $\Rightarrow$ Euler
Critical load P_{cr}	519.9 N	pinned–pinned
Buckling safety factor	3.21	—

Project	Tripteron – 3-PRRR machining table	Page	17/33
Calculation	Sheet 3 – Lead-screw drive	Date	25 / 05 / 2024
Analyst	J. J. García / D. Zuluaga / G. Riaño	Reviewer	Juan Andrés Gallego Sánchez

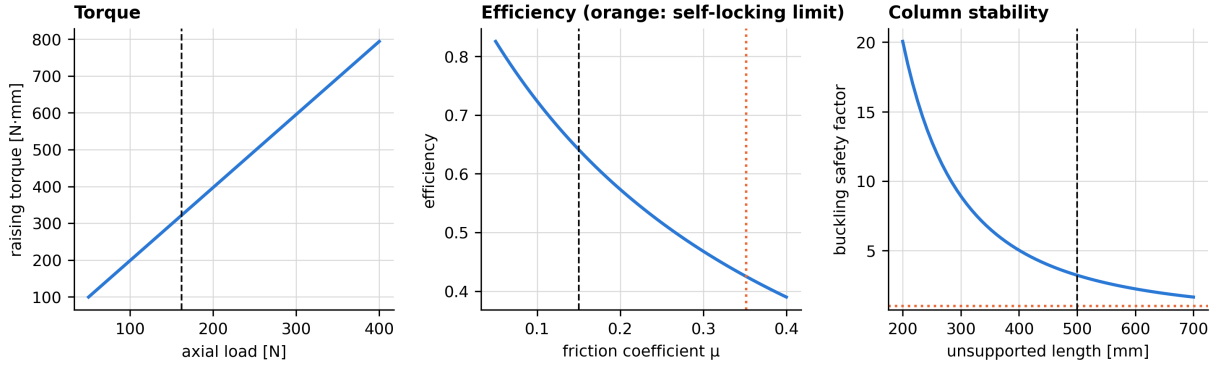


Figure 6: Lead-screw verification: torque breakdown, stress components and column check.

Conclusions

- Strength is not the driver.** The von Mises stress of 14.3 MPa gives a safety factor of 25.8. The 8 mm screw is far stronger than the load requires; it was selected for availability and for the compatibility of its 8 mm lead with the required feed rates.
- Buckling governs the screw.** With a safety factor of 3.21 against Euler buckling, the column check is eight times more restrictive than the stress check. This is the correct behaviour for a long, slender screw and it is the criterion that must be re-examined if the stroke is ever increased: P_{cr} falls with the square of the length, so a 700 mm screw would drop to 265 N and a safety factor of 1.6, which would no longer be acceptable.
- The screw is not self-locking.** A 4-start thread has a lead angle of 19.99° ; equation (19) requires $\mu \geq 0.351$ while the greased steel-bronze pair gives $\mu = 0.15$. The vertical axis *will* back-drive under gravity if the motor is de-energised. Two consequences, both already covered by the selected hardware:
 - the closed-loop NEMA 34 motor must keep holding current at standstill — it needs only 0.32 N m out of 4.5 N m, i.e. 7.1 % of its holding torque;
 - an electromagnetic brake or a mechanical stop is mandatory on the z axis for maintenance and for a power failure. This is a safety item, not an optional one.

The efficiency of 64.1 % is the direct trade-off: a fast, efficient, non-self-locking screw.

- Motor sizing is comfortable.** 0.32 N m required against 4.5 N m available leaves a factor of 14 for acceleration, preload, friction ageing and the inertia of the screw itself.

Project	Tripteron – 3-PRRR machining table	Page	18/33
Calculation	Sheet 4 – R-pair guides and carriages	Date	25 / 05 / 2024
Analyst	R. Bueno / G. Riaño / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Description

Each axis is guided by two parallel hardened rods on which the carriage of the R pair slides. The nut on the lead screw takes the axial load, which Sheet 3 has already verified; *everything else* the joint has to carry — the two transverse force components and the three moment components — goes through the rods and their linear bushings. Because the arms of a Tripteron reach out from the carriage, that moment is large, and this is the sheet that decides whether the guides can take it.

Objective of the calculation

1. Obtain the load on the most loaded linear bushing of each carriage and compare it with the static rating of the bushing fitted.
2. Obtain the bending stress and the deflection of the guide rods, and compare the deflection with the deflection of the frame.
3. Identify which geometric parameter of the carriage governs the result.

Variables of the calculation model

Symbol	Description	Value
d	Guide rod diameter (12 H7 bore on the bearing support drawing)	12 mm
ℓ	Clear span of the rod between end supports	500 mm
b	Distance between the two bushings of one carriage	60 mm
s	Track width, distance between the two rods	115 mm
I	Second moment of area of a rod, $\pi d^4/64$	1018 mm ⁴
W	Section modulus of a rod, $2I/d$	169.6 mm ³
E	Young's modulus, hardened steel	207 GPa
S_y	Yield strength of the rod	350 MPa
C_0	Static load rating of one linear bushing (LM12UU, catalogue)	540 N
C	Dynamic load rating of one linear bushing	390 N

The rod diameter and the two spacings are read from the Delivery 2 carriage and bearing-support drawings; the ratings are those of a standard LM12UU bushing and must be replaced by the catalogue values of the type actually fitted before the result is used as an acceptance criterion.

Project	Tripteron – 3-PRRR machining table	Page	19/33
Calculation	Sheet 4 – R-pair guides and carriages	Date	25 / 05 / 2024
Analyst	R. Bueno / G. Riaño / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Calculation model

The load case is *not* assumed: it is the prismatic-joint reaction $(\mathbf{F}_i, \mathbf{M}_i)$ that the static analysis of Sheet 2 already produced for every pose. Splitting it along the travel axis $\mathbf{u}_i$,

$$\mathbf{F}_i = \underbrace{(\mathbf{F}_i \cdot \mathbf{u}_i) \mathbf{u}_i}_{\text{actuator, taken by the nut}} + \underbrace{\mathbf{F}_t}_{\text{transverse, taken by the bushings}}, \quad \mathbf{M}_i = \underbrace{(\mathbf{M}_i \cdot \mathbf{u}_i) \mathbf{u}_i}_{\text{roll}} + \underbrace{\mathbf{M}_\perp}_{\text{pitch and yaw}}. \quad (25)$$

Each part is then reacted by a different feature of the carriage:

Load	Reacted by	Bushing load
Transverse force F_t	the four bushings together	$F_t/4$
Roll moment $M_\parallel$	a couple between the two rods, lever arm s	$M_\parallel/(2s)$
Pitch/yaw moment $M_\perp$	a couple between the two bushings of one rod, lever arm b	$M_\perp/(2b)$

so that the worst bushing carries

$$F_b = \frac{F_t}{4} + \frac{M_\parallel}{2s} + \frac{M_\perp}{2b}, \quad n_0 = \frac{C_0}{F_b}. \quad (26)$$

Superposing the three contributions on the same bushing is conservative: they reach their maxima at slightly different poses.

The rod itself is treated as a simply supported beam of span ℓ with the carriage at mid span, which is the worst position:

$$F_r = \frac{F_t}{2} + \frac{M_\parallel}{s}, \quad \delta = \frac{F_r \ell^3}{48EI}, \quad \sigma_b = \frac{F_r \ell}{4W}. \quad (27)$$

What the original sheet contained

Nothing of the original *Guías par R* sheet is dropped; it is relocated. That sheet set out to determine, in its own words, the raising and lowering torque, the total torque, the efficiency, the shear stress in torsion and the buckling — all of them properties of the *lead screw*, not of the guides, and all of them already computed in Sheet 3. The table below says where each of its objectives is answered and with what value.

Project	Tripteron – 3-PRRR machining table	Page	20/33
Calculation	Sheet 4 – R-pair guides and carriages	Date	25 / 05 / 2024
Analyst	R. Bueno / G. Riaño / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Original objective	Answered in	Original value	Corrected value
Raising torque T_s	Sheet 3, eq. (16)	302.72 N mm	311.9 N mm
Lowering torque T_d	Sheet 3, eq. (17)	−94.39 N mm	−111.9 N mm
Collar torque T_c	Sheet 3	27.342 N mm	9.7 N mm
Total raising torque	Sheet 3	311.838 N mm	321.6 N mm
Total lowering torque	Sheet 3	−67.048 N mm	−102.2 N mm
Efficiency	Sheet 3, eq. (18)	1.948	64.1 %
Torsional shear	Sheet 3	4.63 MPa	7.58 MPa
Thread shear	Sheet 3	2379.96 MPa	3.77 MPa
Axial stress	Sheet 3	72.21 MPa	5.73 MPa
Buckling P_{cr}	Sheet 3	9428.8 N	519.9 N
Self-locking	Sheet 3	not satisfied	not satisfied (confirmed)

What follows is what that sheet was named after and never did: the verification of the guides themselves.

Results

Pose	Worst carriage	F_b [N]	$n_0 = C_0/F_b$	δ [mm]
Home (0, 0, 0)	3 (z)	188.5	2.86	0.141
Corner (+90, +90, +90)	3 (z)	288.6	1.87	0.146
Corner (−90, −90, −90)	3 (z)	143.2	3.77	0.128
Corner (+90, −90, +90)	3 (z)	282.8	1.91	0.154

Worst pose, per carriage	Carriage 1 (x)	Carriage 2 (y)	Carriage 3 (z)
Transverse force F_t [N]	23.6	23.6	0.0
Pitch/yaw moment $M_{\perp}$ [N·mm]	24,443	14,059	34,636
Roll moment $M_{\parallel}$ [N·mm]	0	0	0
Worst bushing load F_b [N]	209.6	123.1	288.6
Rod deflection δ [mm]	0.146	0.146	0
Rod bending stress σ_b [MPa]	8.7	8.7	0

Bushing spacing b [mm]	40	60 (as built)	80	100	120
Worst bushing load [N]	433.0	288.6	216.5	173.2	144.3
Static safety factor	1.25	1.87	2.49	3.12	3.74

Project	Tripteron – 3-PRRR machining table	Page	21/33
Calculation	Sheet 4 – R-pair guides and carriages	Date	25 / 05 / 2024
Analyst	R. Bueno / G. Riaño / D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

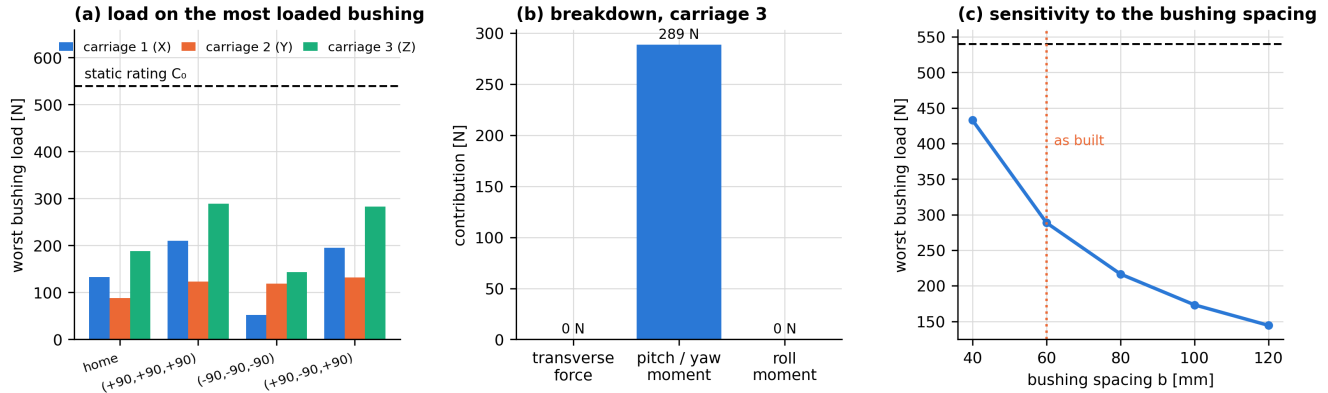


Figure 7: Guide verification: load on the most loaded bushing of each carriage, where that load comes from, and how it depends on the bushing spacing.

Conclusions

- The guides carry the tightest margin in the whole machine.** With a static safety factor of **1.87** against the rating of an LM12UU bushing, the guides are more critical than the buckling of the lead screw (3.21), than the arms (9.6), than the screw body (25.8) and than the frame (66). Any review of this design should start here, not at the screw.
- The load is almost entirely a moment, not a force.** On the vertical carriage the transverse force is zero and the whole 289 N comes from the 34.6 N m pitch moment that the two arms apply to the carriage. This is the structural signature of a Tripteron: the arms reach out from the carriage, so what the guide has to resist is the lever, not the cut.
- The governing parameter is the bushing spacing b , not the rod diameter.** Equation (26) makes the moment term inversely proportional to b : moving the two bushings from 60 mm to 100 mm apart raises the safety factor from 1.87 to 3.12 at no cost in material. Increasing the rod diameter instead would do nothing for the bushing load at all. If one change is made to this machine, this is the one.
- The rods are stiff enough but they dominate the machine's compliance.** Their bending stress is 8.7 MPa against 350 MPa (safety factor 40), so strength is irrelevant; but their worst mid-span deflection of 0.154 mm is larger than the 0.102 mm of the whole welded frame (Sheet 5). Guides and frame together give roughly 0.26 mm, which still meets the 1 mm accuracy requirement of Delivery 1, but the guides — not the chassis — are where the accuracy is lost.

Project	Tripteron – 3-PRRR machining table	Page	22/33
Calculation	Sheet 5 – Chassis finite element verification	Date	25 / 05 / 2024
Analyst	D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Description

The three legs are mounted on a welded frame of square steel tubing that also carries the work table. The frame is the one component whose behaviour cannot be captured by a hand calculation: it is a three-dimensional redundant structure, so it was verified by finite elements in SolidWorks Simulation.

This sheet keeps the original study in full — its model, its loads, its nine result plots and its conclusions — and adds to it the post-processing of the exported nodal data, so that every number quoted here is reproducible from the files in the repository rather than read off a screenshot. The raw exports live in `04_Calculations/data/fea_exports/` and are processed by `tripteron/fea_postprocess.py`.

Objective of the calculation

1. Verify that the frame stays in the elastic range under the weight of the three axis assemblies and the reactions of Sheet 2.
2. Verify that its deflection is small compared with the machining tolerance.
3. Verify the frame against global buckling.


Variables of the calculation model

Symbol	Description	Value
F_1	Total weight carried by axis 1	9.762 kg = 95.75 N
F_2	Total weight carried by axis 2	9.762 kg = 95.75 N
F_3	Total weight carried by axis 3	9.762 kg = 95.75 N
P_m	Mass of one NEMA 34 motor	5.216 kg
P_t	Mass of one lead screw	1.120 kg
P_g	Mass of one linear guide	2.530 kg
P_h	Mass of one arm	0.322 kg
P_e	Mass of the end effector	0.574 kg


All masses were read from the SolidWorks physical-properties tool; each axis load is the sum of the components that rest on that beam, so they carry a small approximation error.

Image of the calculation model

Project	Tripteron – 3-PRRR machining table	Page	23/33
Calculation	Sheet 5 – Chassis finite element verification	Date	25 / 05 / 2024
Analyst	D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

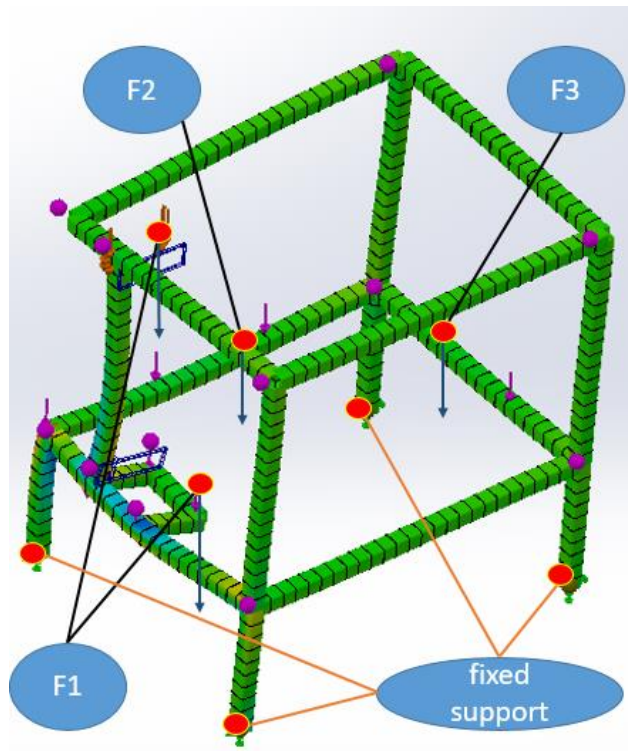

Applied forces and fixed supports

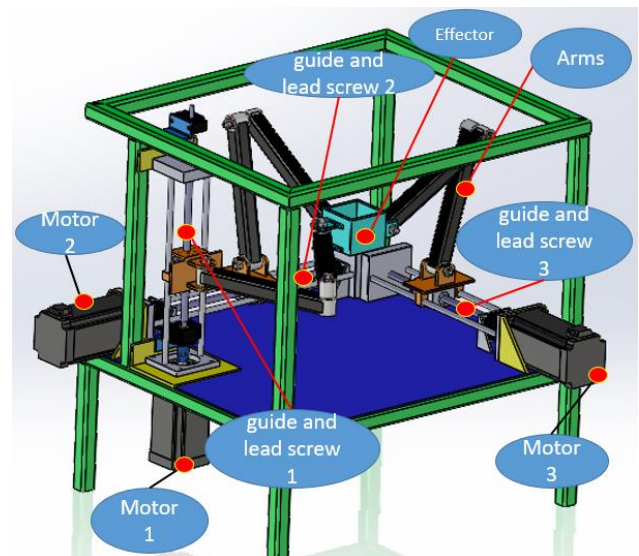

Components whose weight loads the frame

Figure 8: Calculation model: the four fixed feet, the three axis loads and the components whose weight produces them.

Project	Tripteron – 3-PRRR machining table	Page	24/33
Calculation	Sheet 5 – Chassis finite element verification	Date	25 / 05 / 2024
Analyst	D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Values and calculation model

Geometry	Chassis CAD at full size, welded tubular frame
Element type	Beam elements
Material	Alloy steel, $E = 210 \text{ GPa}$, $S_y = 620 \text{ MPa}$
Interaction	Global interaction, rigid joints, independent meshing
Fixation	Four fixed restraints, one per foot
External loads	Three forces of 95.75 N on their respective beams
Mesh	Curvature-based mesh, standard density
Studies	Linear static analysis and linear (eigenvalue) buckling analysis
Post-processing	Nodal values read with <i>identify values</i> on the loaded faces and exported to CSV

Beam elements are the right idealisation here: the frame is made of slender tubes loaded mainly in bending and axial force and welded at the nodes, and a beam model reproduces that behaviour with a fraction of the degrees of freedom of a solid mesh. Local weld stresses are not captured and are covered by the weld sizing of Delivery 2.


Scope of the load case

The load applied in the finite element model is the *self weight* of the three axis assemblies, 95.75 N each. It does not include the cutting force, whose reactions were only obtained later, in Sheet 2. Those reactions reach 162 N on the vertical axis, i.e. 69 % more than the weight already applied on that beam. Because the static safety factor of the frame is 66, adding them cannot bring the structure anywhere near its limit; the deflection, however, would grow roughly in proportion, so the 0.102 mm below should be read as the figure for a machine at rest and about 0.17 mm while cutting.


Results of the calculation model

Static analysis


Project	Tripteron – 3-PRRR machining table	Page	25/33
Calculation	Sheet 5 – Chassis finite element verification	Date	25 / 05 / 2024
Analyst	D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

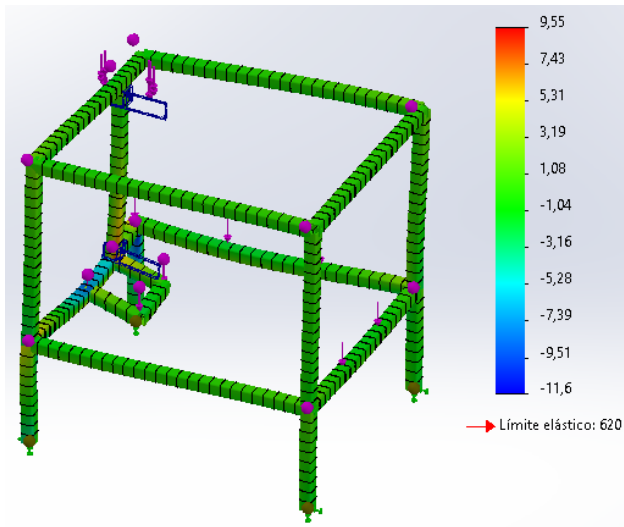


Bending stress [MPa]

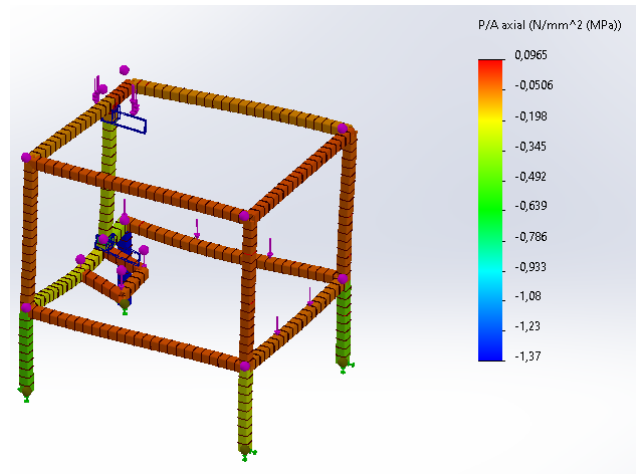



Axial stress [MPa]

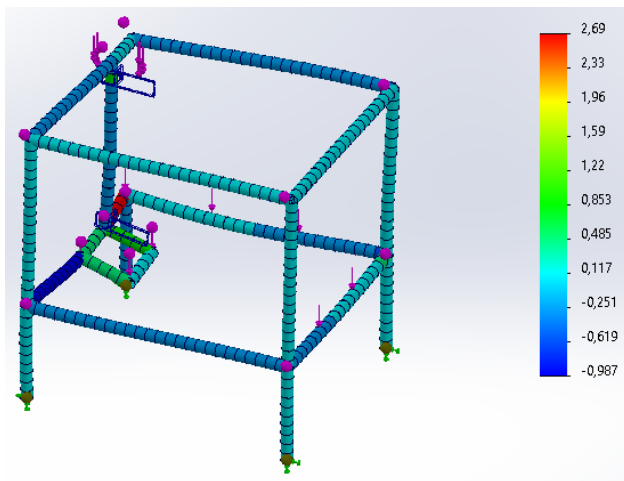

Shear stress, direction 1 [MPa]

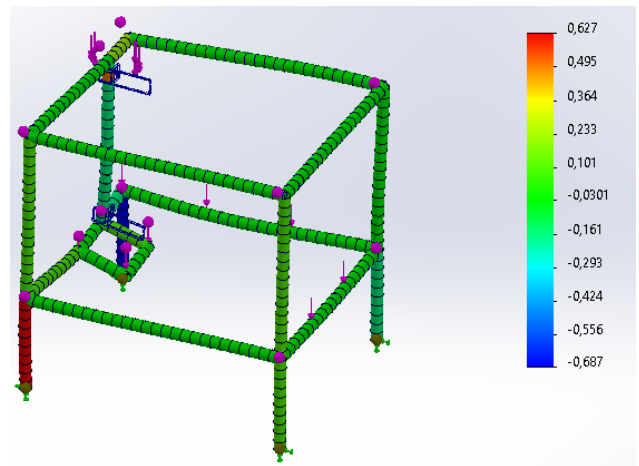

Shear stress, direction 2 [MPa]

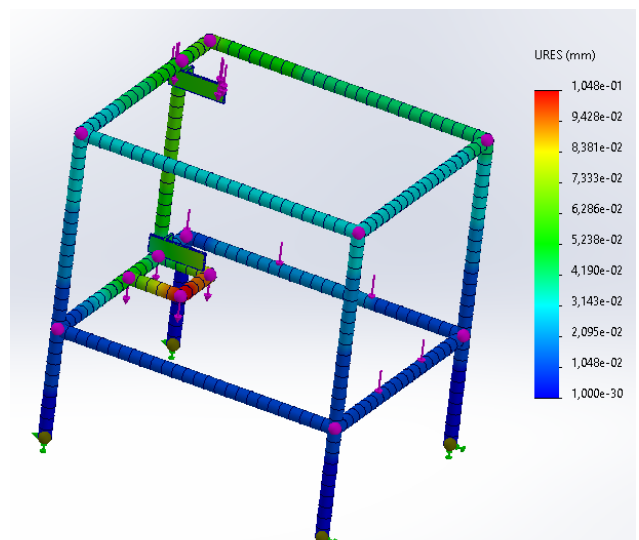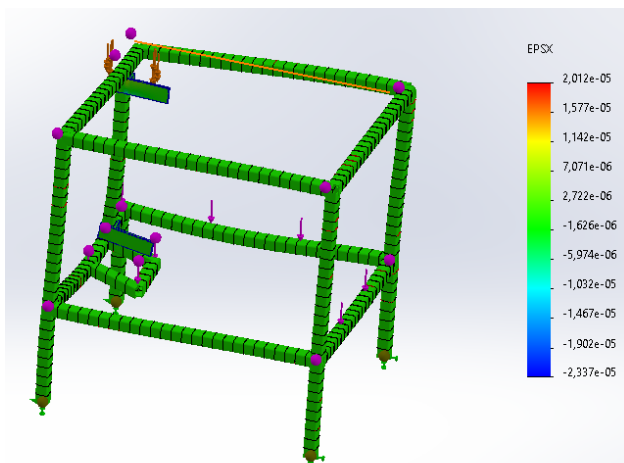

Project	Tripteron – 3-PRRR machining table	Page	26/33
Calculation	Sheet 5 – Chassis finite element verification	Date	25 / 05 / 2024
Analyst	D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

Buckling analysis

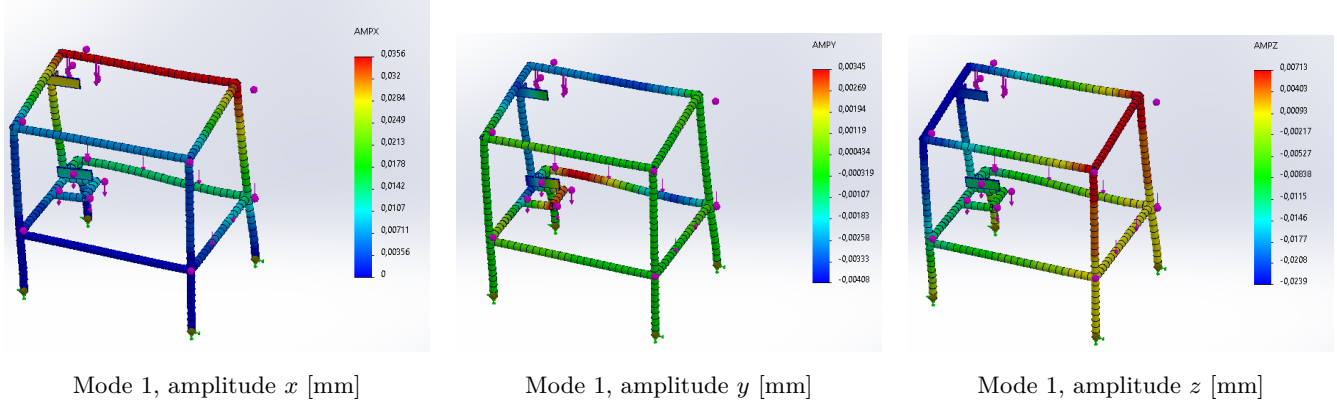


Figure 10: First buckling mode of the frame: a lateral sway of the uprights.

Exported values

The nodal values read on the loaded faces were exported and post-processed by `fea_postprocess.py`; the table below replaces the nine value tables of the original study with a single one, and the figure replaces its nine graphs.

Quantity	Samples	Minimum	Maximum	$ \cdot _{\max}$
Bending stress [MPa]	19	−9.36	−0.574	9.36
Axial stress [MPa]	33	−0.305	0.0029	0.305
Shear stress, dir. 1 [MPa]	40	−0.987	2.69	2.69
Shear stress, dir. 2 [MPa]	31	−0.219	0.627	0.627
Strain [−]	23	-6.4×10^{-6}	2.9×10^{-6}	6.4×10^{-6}
Displacement [mm]	22	0	0.1016	0.1016
Buckling mode 1, x [mm]	27	0	0.0285	0.0285
Buckling mode 1, y [mm]	24	−0.0035	0.0035	0.0035
Buckling mode 1, z [mm]	21	−0.0213	0.0019	0.0213

Verification	Result
Governing stress	bending, 9.36 MPa
Yield strength	620 MPa
Static safety factor	66
Maximum displacement	0.102 mm
Buckling load factor	2238

Project	Tripteron – 3-PRRR machining table	Page	27/33
Calculation	Sheet 5 – Chassis finite element verification	Date	25 / 05 / 2024
Analyst	D. Zuluaga	Reviewer	Juan Andrés Gallego Sánchez

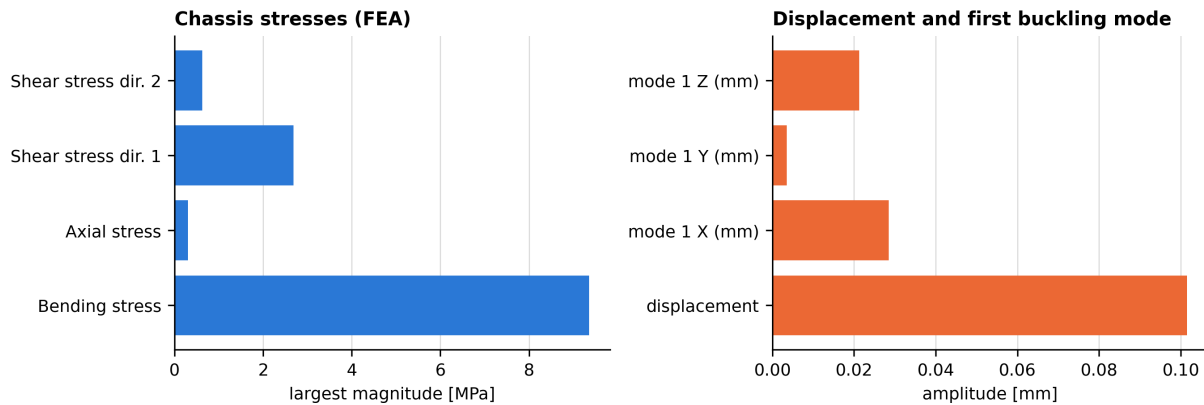


Figure 11: Range of each exported quantity and the resulting margins.

Results and conclusions of the calculation model

1. **The frame is massively over-strength.** A safety factor of 66 against yield and a buckling load factor of 2238 mean the structure is nowhere near its strength limit. This is not an error: the frame was sized by *stiffness* and by the commercial tube sizes available, not by stress. In a machine tool the deflection under load is what shows up on the part, and it is always the binding requirement.
2. **Stiffness is the meaningful result.** The maximum displacement of 0.102mm occurs at the top rail, furthest from the feet. Referred to the 200mm workspace this is 0.05%, and it is of the same order as the positioning resolution of the drives. It is acceptable for the intended use (light milling of aluminium and plastics), but it is one of the two numbers that limit the achievable accuracy of the machine — the other being the 0.154 mm of the guide rods in Sheet 4, which is larger.
3. **The dominant stress is bending**, an order of magnitude above the axial and shear components. The load path is therefore what one would expect: the reactions of the legs are applied off the neutral axis of the rails and are carried in bending to the feet. If the frame were ever to be lightened, the rails in bending are what must be preserved; the diagonal members carry little load.
4. **Global buckling is irrelevant** for this structure at this load level. The first mode is a lateral sway of the uprights, and it would require 2238 times the service load to occur.
5. **The load case can be tightened.** Rerunning the study with the joint reactions of Sheet 2 instead of the bare self weight would not change any conclusion, but it would give a deflection figure valid while cutting. That is the one change worth making to this study.

Project	Tripteron – 3-PRRR machining table	Page	28/33
Calculation	Appendix A – Corrections	Date	25 / 05 / 2024
Analyst	Group 2	Reviewer	Juan Andrés Gallego Sánchez

Corrections to the previous calculation memo

The earlier version of this memo contained a number of results that cannot be correct on physical grounds. Each of them is listed below with the reason it is wrong and the value that replaces it. All the replacement values come from the recomputation documented in Sheets 1–5. The page references are to the original submission, *MemoriaCalculosGrupo2Maquinas1.pdf*, dated 25 May 2024.

#	Previous result	Why it cannot be right	Corrected value
A. Two sheets for the same screw			
1	The sheets <i>Tornillo de potencia</i> (pp. 23–29) and <i>Guías par R</i> (pp. 30–37) calculate the same screw and disagree on every line	Same formulas, different arithmetic. T_c : 9.114 vs. 27.342 N mm; T_{lower} : –85.271 vs. –67.048; e : 0.6202 vs. 1.948; σ_a : 3.438 vs. 72.21 MPa; τ_{thread} : 0.1958 vs. 2379.96 MPa; P_{cr} : 93.06 vs. 9428.8 N. At most one of each pair could be right; in fact both are, because the formulas themselves are wrong.	One screw, one sheet: Sheet 3, with $T_R = 321.6$ N mm, $e = 64.1\%$, $\sigma_a = 5.73$ MPa, $\tau_{\text{thread}} = 3.77$ MPa, $P_{cr} = 519.9$ N
2	The guides themselves were never verified: the sheet titled <i>Guías par R</i> repeats the screw calculation	The whole point of that sheet — can the bushings and rods take the moment the arms apply to the carriage? — is never asked.	New Sheet 4. The guides turn out to hold the <i>tightest</i> margin of the machine, $n_0 = 1.87$
B. Lead screw			
3	$e_{\text{ascenso}} = 1.948$ (p. 35)	Efficiency above 1 would create energy. The expression was inverted, and 2 was used where 2π belongs.	$e = FL/(2\pi T_R) = 64.1\%$
4	$T = P \frac{d_p}{2} d_p \cos \theta f$ (pp. 25, 33)	Dimensionally inconsistent: it returns N mm ² . It is not the power-screw relation, and it contains neither the lead nor the sign change between raising and lowering.	Shigley, equations (16) and (17)

Project	Tripteron – 3-PRRR machining table	Page	29/33
Calculation	Appendix A – Corrections	Date	25 / 05 / 2024
Analyst	Group 2	Reviewer	Juan Andrés Gallego Sánchez

#	Previous result	Why it cannot be right	Corrected value
5	$T_c = 27.342 \text{ N mm}$ (p. 34)	$T_c = \mu_c F d_c / 2$ with $d_c = 6 \text{ mm}$ gives a lever of 3 mm, not 9 mm. The other sheet got this one right.	$T_c = 9.72 \text{ N mm}$ at the corrected design load
6	Thread shear 2379.96 MPa (p. 36)	Six times the yield strength of any screw steel. The shear area was written as $(d_r w)^2 / 4 A w$, which is not an area of anything.	$\tau = 2F / (\pi d_r w p n_t) = 3.77 \text{ MPa}$, $n_{\text{thread}} = 56.6$
7	$\sigma_a = 16P(d_p + d_r)^2 / (\pi d_r^4)$, giving 3.438 MPa on p. 28 and 72.21 MPa on p. 35	That is a bending expression, not an axial one; an axial stress is force over area. Evaluated correctly the wrong formula gives 72.2 MPa, so the 3.438 MPa is also an arithmetic slip.	$\sigma_a = F / A_r = 5.73 \text{ MPa}$
8	$P_{cr} = 2EI / \ell^2$ with $E = 20,000 \text{ MPa}$, giving 93.06 N (p. 29) and 9428.8 N (p. 37)	The Euler load is $\pi^2 EI / (K\ell)^2$, and steel has $E = 207,000 \text{ MPa}$. The two answers differ by a factor of exactly 100, so at least one is also an arithmetic slip.	$P_{cr} = \pi^2 EI / (K\ell)^2 = 519.9 \text{ N}$, $n = 3.21$
9	Slenderness $S_r = \ell / (I/A) = 285.7$ with $A = 4\pi d_r^2$ (p. 29)	Slenderness is ℓ / r_g with $r_g = \sqrt{I/A}$, and the area of a circle is $\pi d_r^2 / 4$, not $4\pi d_r^2$. The value was never used to choose between the Euler and the Johnson regime.	$\ell / r_g = 333$ against a transition of 105 $\Rightarrow$ Euler regime
10	$p = 4 \text{ mm}$ with 2 starts, yet $d_r = 7 \text{ mm}$ throughout	The two are incompatible: $d_r = d - p$ gives 4 mm for $p = 4$. A root diameter of 7 mm corresponds to $p = 2 \text{ mm}$, which is the screw actually fitted.	Tr8×8(P2), 4 starts: $p = 2 \text{ mm}$, $L = 8 \text{ mm}$, $d_m = 7 \text{ mm}$, $d_r = 6 \text{ mm}$
11	Self-locking claimed for the vertical axis	Consequence of #10. A 4-start screw with $\mu = 0.15$ cannot be self-locking.	Not self-locking; a brake or permanent holding current is required on z

C. Statics

Project	Tripteron – 3-PRRR machining table	Page	30/33
Calculation	Appendix A – Corrections	Date	25 / 05 / 2024
Analyst	Group 2	Reviewer	Juan Andrés Gallego Sánchez

#	Previous result	Why it cannot be right	Corrected value
12	“27 equations and 27 unknowns”, “8 bars with 9 binary revolute pairs” (p. 3)	The machine has 10 moving bodies and 12 joints. The three prismatic joints were left out of the model altogether.	60 equations, 63 unknowns, rank 60, 3 redundant reactions
13	The actuator forces never appear in the results (p. 7)	They are the reason a static analysis is done at all: without them the screw and the motor cannot be sized. Leaving the prismatic joints out of the model removed them.	$F_x = F_y = -80.9\text{ N}$, $F_z = 157.9\text{ N}$ at home; design load 162.0 N
14	Reactions of 0 to 10 N, most of them exactly zero (p. 7)	A 120 N cutting force cannot produce 5.77 N of reaction. An all-zero solution is the trivial solution of a system assembled without its load vector.	Residual below $3 \times 10^{-9}\text{ N}$, cross-checked by virtual work
15	Cutting force applied upwards	An end mill pushes the work downwards against the table; applied upwards it cancels part of the weight of the moving assembly and under-predicts the load on the vertical screw.	$\mathbf{F}_c = [80, 80, -120]^T\text{ N} \Rightarrow$ design load 162.0 N instead of 85 N

D. Kinematics and presentation

16	No verification of the kinematic solution	A position solution with no residual and no independent check cannot be audited.	Newton–Raphson residual below $8 \times 10^{-11}\text{ mm}$, agreement with the closed-form inverse kinematics to 10^{-13} mm , velocities and accelerations checked against finite differences
17	The chassis sheet (pp. 38–60) carries no date and no reviewer	An unsigned, undated calculation sheet cannot be released.	Every sheet of this edition carries project, calculation, analyst, reviewer, date and page

Project	Tripteron – 3-PRRR machining table	Page	31/33
Calculation	Appendix A – Corrections	Date	25 / 05 / 2024
Analyst	Group 2	Reviewer	Juan Andrés Gallego Sánchez

Effect of the corrections on the design

None of the corrections invalidates the machine. The two that matter in practice are:

- **Correction 8** raises the design axial load from 85 N to 162.0 N. The screw still passes every check, but the buckling safety factor drops from about 6 to 3.21, which is why the column check — and not the stress check — is now the governing criterion for the transmission.
- **Correction 11** changes an operating requirement: the vertical axis is not self-locking and needs a brake or a permanently energised motor. This is a safety item that the previous memo did not identify.
- **Correction 2** changes where the attention should go. Because the sheet that was supposed to verify the guides verified the screw instead, nobody ever computed the load on the bushings. It turns out to be the tightest margin in the machine ($n_0 = 1.87$), and it is fixed by moving two bushings further apart — the cheapest change available anywhere in this design.

Project	Tripteron – 3-PRRR machining table	Page	32/33
Calculation	Appendix B – Calculation software	Date	25 / 05 / 2024
Analyst	Group 2	Reviewer	Juan Andrés Gallego Sánchez

Reproducing the results

Every figure and every number in this report is generated by the Python package stored in the folder `04_Calculations`. A single command regenerates all of them:

`python run_all.py`

The script creates its own virtual environment on first use, installs the dependencies and writes the results to `results/` (CSV and JSON) and `figures/` (PNG).

Module	Contents
<code>parameters.py</code>	All machine data in one place: geometry, masses, materials, loads.
<code>kinematics.py</code>	Constraints, Jacobian, $\dot{\mathbf{J}}$, Newton–Raphson solver, closed-form inverse kinematics, trajectory generation, workspace mapping.
<code>statics.py</code>	Assembly of the 60×63 equilibrium system, minimum-norm solution, virtual-work actuator forces, arm section properties and bending stresses.
<code>power_screw.py</code>	Screw geometry, raising/lowering torque, efficiency, self-locking, stresses, Euler/Johnson column check.
<code>guides.py</code>	Splits the prismatic-joint reaction into transverse force, roll and pitch/yaw moment; bushing loads, rod stress and deflection, sensitivity to the bushing spacing.
<code>fea_postprocess.py</code>	Reads the nodal data exported from SolidWorks Simulation and computes the ranges and safety factors of Sheet 4.
<code>run_all.py</code>	Runs the four studies and writes results and figures.

Verification strategy

Each physical result is produced by two independent routes, and the report states the discrepancy between them:

Result	Method 1	Method 2
Position	Newton–Raphson on $\Phi(\mathbf{q}, t) = \mathbf{0}$	Closed-form 2R inverse kinematics
Velocity, acceleration	Analytical $\mathbf{J}$, $\dot{\mathbf{J}}$	Finite differences of the position solution
Actuator forces	60×63 rigid-body equilibrium	Principle of virtual work
Screw	Shigley closed-form expressions	Dimensional and physical bounds ($e \leq 1$, $\sigma < S_y$)
Guides	Prismatic-joint reactions of Sheet 2	Free-body couple check on the carriage
Chassis	Finite elements	Order-of-magnitude hand check of the rails in bending

Project	Tripteron – 3-PRRR machining table	Page	33/33
Calculation	Appendix B – Calculation software	Date	25 / 05 / 2024
Analyst	Group 2	Reviewer	Juan Andrés Gallego Sánchez

End of report