
AQUAFEED PRO — HARDWARE WIRING

Presentation schematic | Rev B | 13 October 2026


Supply blocks omitted. Pi powered through its USB-C port.

VMOTOR / VBLOWER / VRELAY: external supplies, ratings TBD.

01 CONTROLLER / USB-C POWER

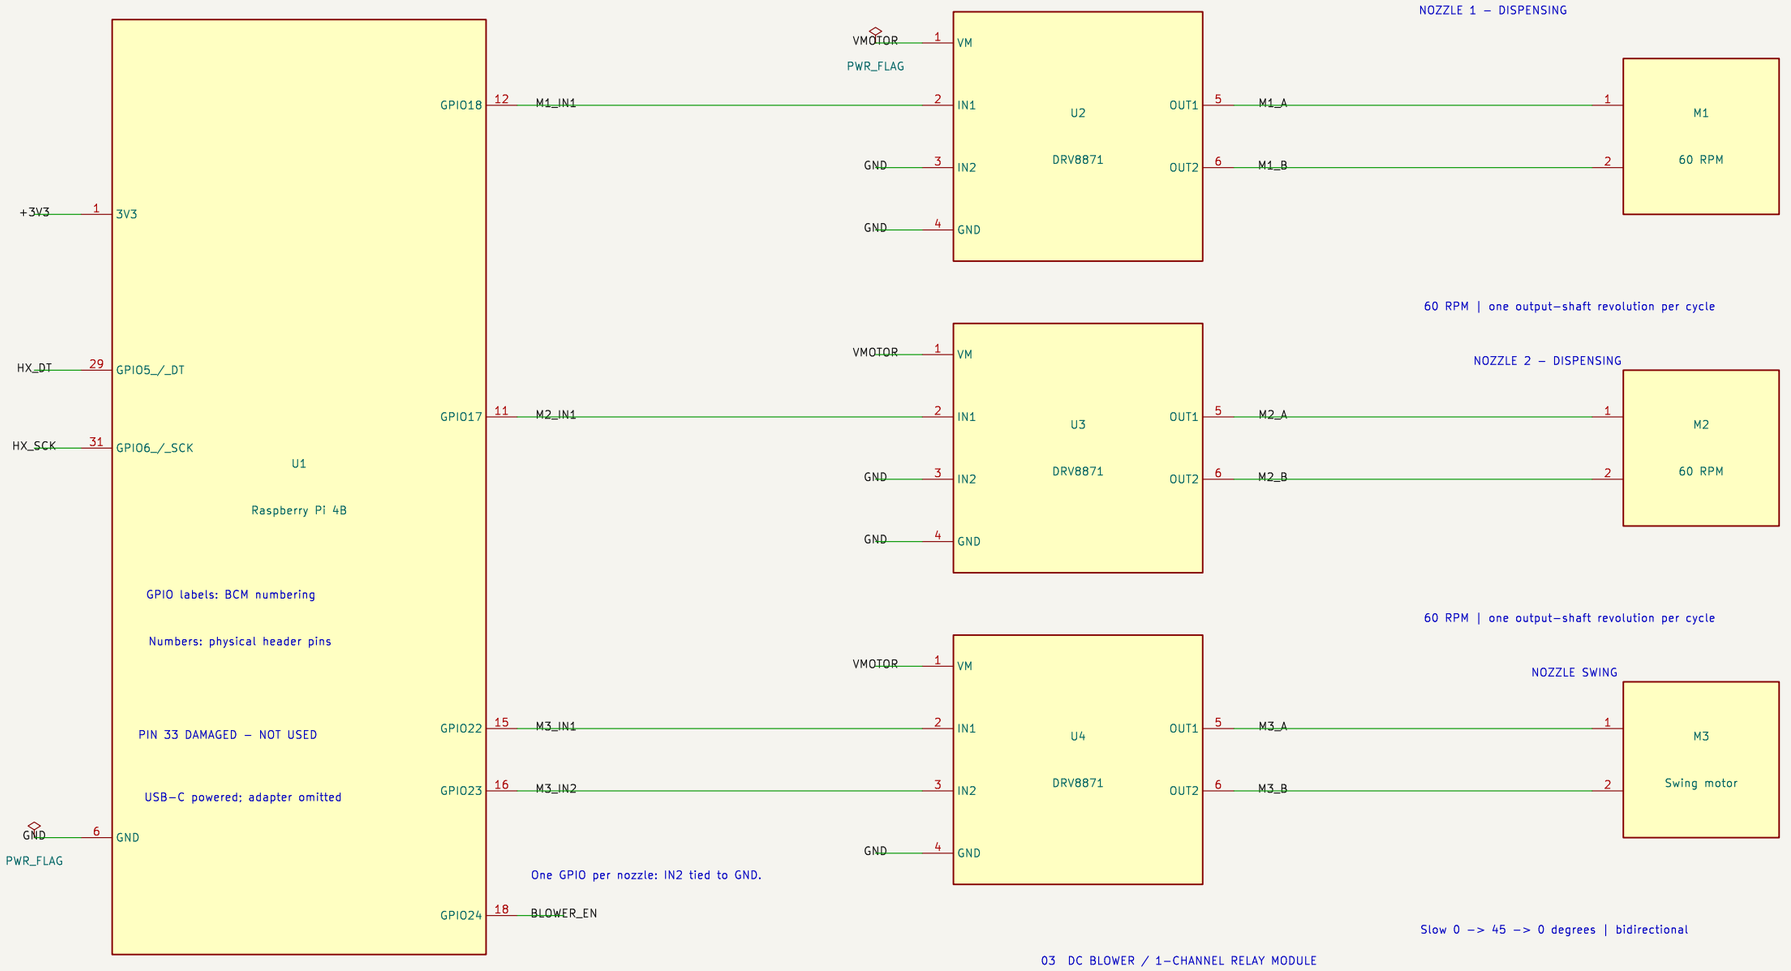


02 SHARED HOPPER WEIGHING

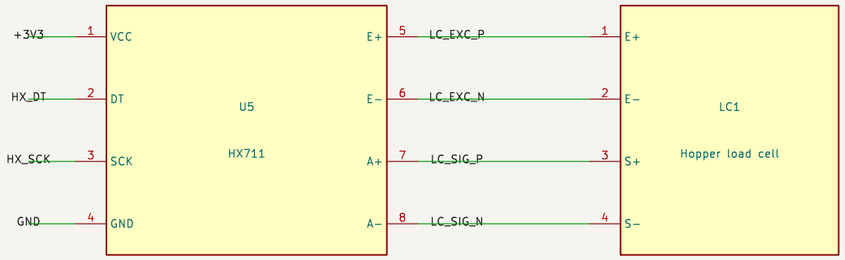

03 DC BLOWER / 1-CHANNEL RELAY MODULE

IN connection assumes a 3.3 V-compatible module; verify.

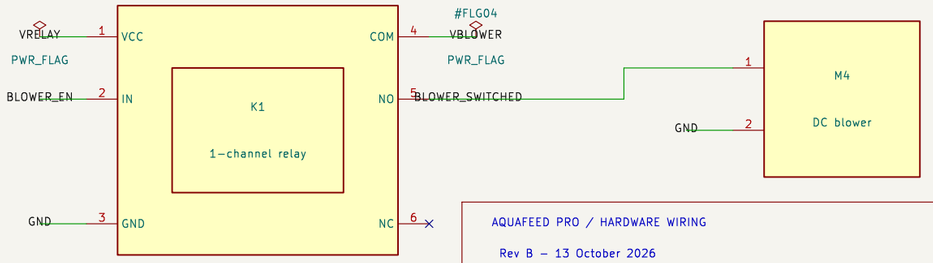

HX711: 3.3 V-compatible board assumed; verify actual module.

E = excitation; S = signal. Identify load-cell leads by datasheet.

Module numbers are symbolic except U1 header pins. Verify actual board terminal labels.

Position feedback is not shown. Dispense nozzle 1 then nozzle 2; never together.

AQUAFEED PRO / HARDWARE WIRING

Rev B — 13 October 2026

Presentation draft / ratings to verify

Sheet: /
File: AquaFeedPro-Wiring.kicad_sch

Title:

Size: A3	Date:	**Rev:**
KiCad E.D.A. 9.0.4		Id: 1/1