

Schematic Sheets




#	Name	File	Description
1	Main	SensWear_Temperature	Temperature Sensor IC
2			
3			
4			

Revision History

Revision	Date	Description
A0	May 2025	Initial validation design on rigid PCB
B0	March 2026	Flexible PCB manufacturing updates



		SensWear-V1R1	
Designer/Engineer	Board Title		
Yusein Ali	SensWear-Temperature		
Drawn By	Document Name		
Yusein Ali	SensWear-V1R1-Temperature-		
Approved By	Ver.	Rev.	Date
Dariush Salami	1	B0	01.03.2026

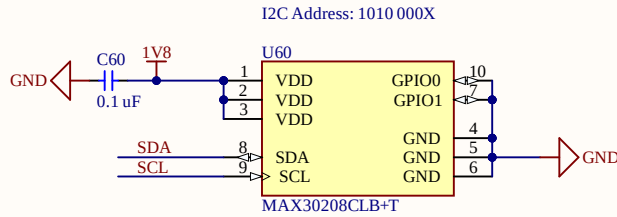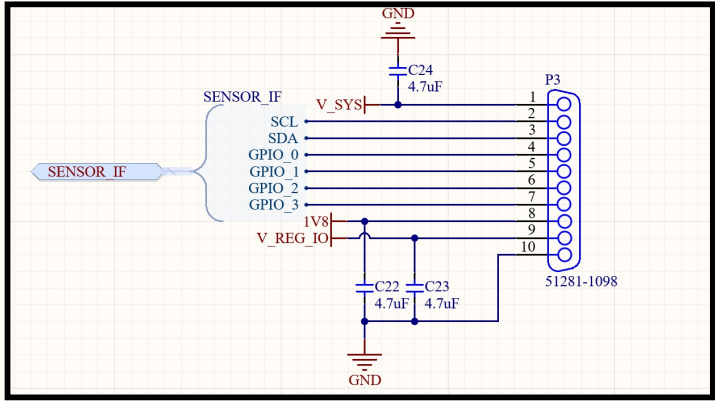

TEMPERATURE SENSOR (MAX30208) USAGE NOTES

Logic Level: 1.8V (VDD / 1V8)

[1. INTERFACE]

Protocol : I2C (I2C21) / SMBus-compatible

Speed : Up to 400 kHz

Address : 0x50, 7-bit Zephyr address

0xA0 write / 0xA1 read

GPIO1=0, GPIO0=0 -> 1010 000X

[2. PIN MAPPING]

Signal	MAX30208 Pin(s)	Net
SCL	Pin 9	SYS_I2C_SCL (P1.03)
SDA	Pin 8	SYS_I2C_SDA (P1.02)
VDD	Pins 1,2,3	1V8
GND	Pins 4,5,6	GND
GPIO0	Pin 10	Addr
GPIO1	Pin 7	Addr

[3. NOTES]

GPIO0/GPIO1 set the I2C address at START.

Default pulldown state gives address 0x50.


GPIO0 can be interrupt; GPIO1 can be conversion trigger.



SensWear-V1R1

Designer/Engineer Yusein Ali	Board Title SensWear-Temperature
Drawn By Yusein Ali	Document Name SensWear_Temperature.SchDoc
Approved By Dariush Salami	Rev. B0 Sheet 1 of 1 Date 01.03.2026 Size A4

View from Top side (Scale 4:1)

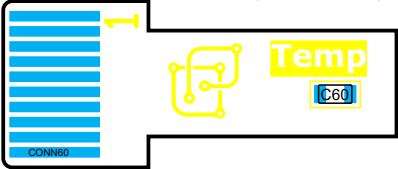

View from Bottom side (Scale 4:1)



Bill Of Materials

Line #	Designator	Comment	Quantity
1	C60	0.1 uF	1
2	CONN60	NC	1
3	U60	MAX30208CLB+T	1