


Installation

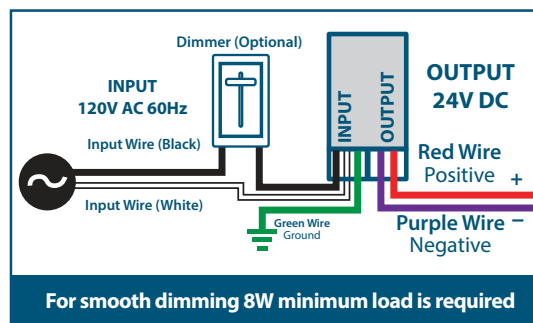

Constant voltage dimmable drivers for indoor applications


SPECIFICATIONS

908 SERIES

GENERAL FEATURES

- Dimmable with any standard MLV/Incandescent TRIAC-(Leading edge) dimmer switch
- Super compact ALUMINUM CASE.
- Class 2
- UL 8750
- Nema 3R enclosure
- Auto-Reset Protection for short circuits, over-voltage and over-temperature.
- FCC 15 part 2
- 24V DC True RMS
- Weight: 1.4kg / 3lbs
- Dimmable to 1%

DIMENSION

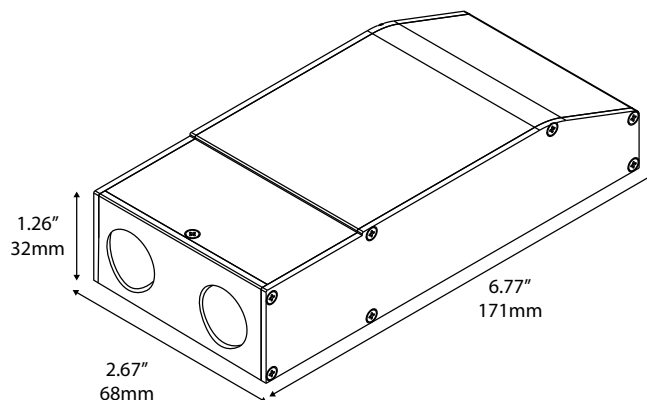

MAX LOAD

40 W

60 W

96 W

OUTPUT VOLTAGE PART NO.	12 V 908-12040	24 V 908-24040	12 V 908-12060	24 V 908-24060	24 V 908-24100
Input Voltage	120 V AC	120 V AC	120 V AC	120 V AC	120 V AC
Input Current at Max Load	0.41 A	0.41 A	0.61 A	0.61 A	1 A
Output Current at Max Load	3.5 A	1.75 A	5.26 A	2.63 A	4.2 A
Power Factor	0.95	0.95	0.95	0.95	0.95
Efficiency	> 90%	> 90%	> 90%	> 90%	> 90%
Operating Temp.	-20°C - 70°C (-4°F - 158°F)	-20°C - 70°C (-4°F - 158°F)	-20°C - 70°C (-4°F - 158°F)	-20°C - 70°C (-4°F - 158°F)	-20°C - 70°C (-4°F - 158°F)
Short circuit protection	Yes	Yes	Yes	Yes	Yes
Overcurrent	Yes	Yes	Yes	Yes	Yes
Over temperature	Yes	Yes	Yes	Yes	Yes
Over circuit protection	Yes	Yes	Yes	Yes	Yes
Input wires (white / black)	18 AWG	18 AWG	18 AWG	18 AWG	18 AWG
Output wires (red+ / Blue -)	14 AWG	14 AWG	14 AWG	14 AWG	14 AWG
Weight	17 oz	17 oz	17 oz	17 oz	17 oz

QUANTITY	PROJECT
NOTE	

