


902 DRIVERS STD

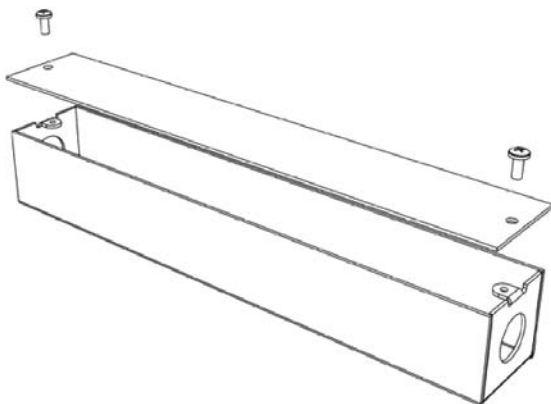

Electronic driver

SPECIFICATIONS

DRIVERS STD

GENERAL

Our drivers are provided with steel housing


DRIVERS TECHNICAL

- high efficiency
- reinforced insulation from input to output
- fully protected:
 - against short circuit
 - against input voltage surge
 - against thermal
 - over voltage protection

ENCLOSURE TECHNICAL

- galvanized steel housing

DIMENSION

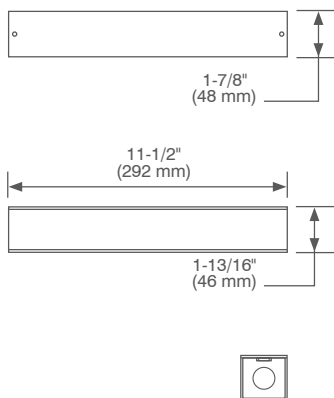

Please specify:

- MODEL ☐ **902** – driver
- CONSTANT CURRENT
350 mA ☐ **35008** – 8W
☐ **35010** – 10W
☐ **35012D** – 12W
☐ **35016D** – 16W
- CONSTANT CURRENT
12 VOLT ☐ **12025** – 25W
☐ **12060** – 60W
- 24 VOLT ☐ **24010** – 10W
☐ **24025** – 25W
☐ **24060** – 60W
☐ **24080** – 80W
☐ **24096** – 96W

QUANTITY	PROJECT
NOTE	

