




PROFILE DAGGER

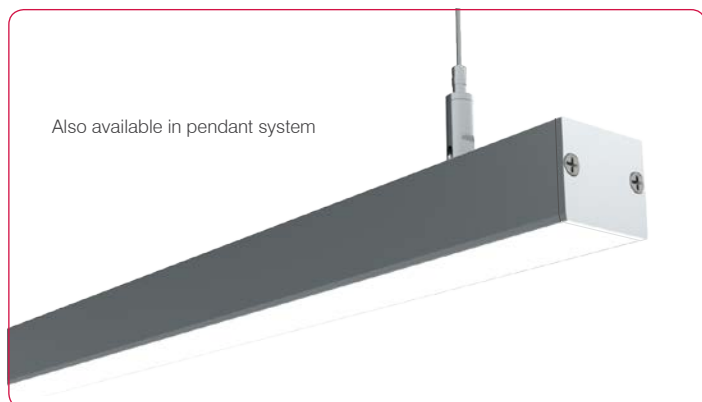

The Dagger is a surface mount linear profile. It is modular, versatile and easy to install.

Profile

- Extruded aluminium construction
- Anodized finish
- Available in custom length
- $L \leq [8']$ (2,44 m)
- Easy wiring: profiles sections connect directly to each other via connectors (or using a connectors equipped jumper wire if necessary)
- No pixelation
- Caps included



HOW TO ORDER DAGGER?

Please pick your profile:

Add a length: (m)

e.g. 565-135-2.00

part no. **565** - **135** - -

LENGTH

565 profile **135** Dagger

Please pick your lens:

Add a length: (m)

e.g. 555-502-2.00

part no. **555** - -

MODEL

LENS

LENGTH

555 profile **500** frosted
502 clear

Please pick your LED:

Add a length: (m) *check cut length

part no. **551** - - - - -

e.g. 551-580-030-40-2.00

CRI	LED	STYLE	COLOUR TEMPERATURE	LENGTH
580 <85	ECO	030 360	27 2700 K	
		060 680	32 3200 K	
		095 1080	41 4100 K	
		120 1420		
780 >85	PRO-HP	100 1080	27 2700 K	
		170 1800	30 3000 K	
		190 1920	35 3500 K	
			40 4000 K	
			55 5500 K	
	PRO-PLUS	104 1043	22 2200 K	
			25 2500 K	
			27 2700 K	
			30 3000 K	
			35 3500 K	
		325 3246	40 4000 K	
			55 5500 K	
			22 2200 K	
			25 2500 K	
			27 2700 K	
	CONTROLLED WHITE	CTI 1477	CT 2000-4000K	
	PRO-CRI95	150 1533	27 2700 K	
			30 3000 K	
			40 4000 K	
	RGB	RGB	98 RGB	
			99 RGB+W	

Your final number is:

e.g. 565-115-08-502-551-580-030-40-2.00

part no. **565** - **135** - - - **551** - - - -

MODEL

PROFILE
STYLE

PROFILE
FINISH

LENS

CRI

STYLE


COLOUR
TEMPERATURE

OVERALL
LENGTH

24V LINEAR LED LIGHT SOURCE

MILES ECO

STYLE	LED/M	WATT/M	LUMENS/M	CRI	MAX. LENGTH	CUT LENGTH	COLOUR TEMPERATURE				
							2300	2700	3200	4100	5500
030	60	4.8	360	83	5.0m	100mm		●	●	●	
060	120	9.6	680	83	5.0m	50mm		●	●	●	
095	60	14.4	1080	83	5.0m	100mm		●	●	●	
120	240	19.2	1420	83	5.0m	25mm		●	●	●	



MILES PRO-HP

STYLE	LED/M	WATT/M	LUMENS/M	CRI	MAX. LENGTH	CUT LENGTH	COLOUR TEMPERATURE					
							2300	2700	3000	3500	4000	5500
100	40	10.6	1080	85	6.0m	150mm		●	●	●	●	
170	66	17.9	1800	85	5.0m	90mm		●	●	●	●	
190	40	19.3	1920	85	4.5m	150mm		●	●	●	●	●



MILES PRO-PLUS

Single bin only, MacAdam colour consistency, LED pitch in 8mm

STYLE	LED/M	WATT/M	LUMENS/M	CRI	MAX. LENGTH	CUT LENGTH	COLOUR TEMPERATURE						
							2200	2500	2700	3000	3500	4000	5500
104	117	8	1043*	85	7.5m	60mm	●	●	●	●	●	●	●
325	117	26	3246*	85	3.5m	60mm	●	●	●	●	●	●	●

* Lumen output based on 3000K, for other output information, please consult Senso or refer to separate LED specification document.



104

325

MILES CONTROLLED WHITE

STYLE	LED/M	WATT/M	LUMENS/M	CRI	MAX. LENGTH	CUT LENGTH	COLOUR TEMPERATURE
							2000-4000
CT1	200	16	1477	85	3.24m	60mm	●



CT1

MILES PRO-CRI95

STYLE	LED/M	WATT/M	LUMENS/M	CRI	MAX. LENGTH	CUT LENGTH	COLOUR TEMPERATURE				
							2300	2700	3000	4000	5500
150	66	17.9	1533	95	5.0m	90mm		●	●	●	



150

MILES RGB

STYLE	LED/M	WATT/M	LUMENS/M	CRI	MAX. LENGTH	CUT LENGTH
RGB	60	14.4	670		5.0m	100mm



RGB


MILES RGB+W

STYLE	LED/M	WATT/M	LUMENS/M	CRI	MAX. LENGTH	CUT LENGTH
RGB+W	266	22.25	1193		3.25m	90mm



RGB+W



Accessories for Dagger:

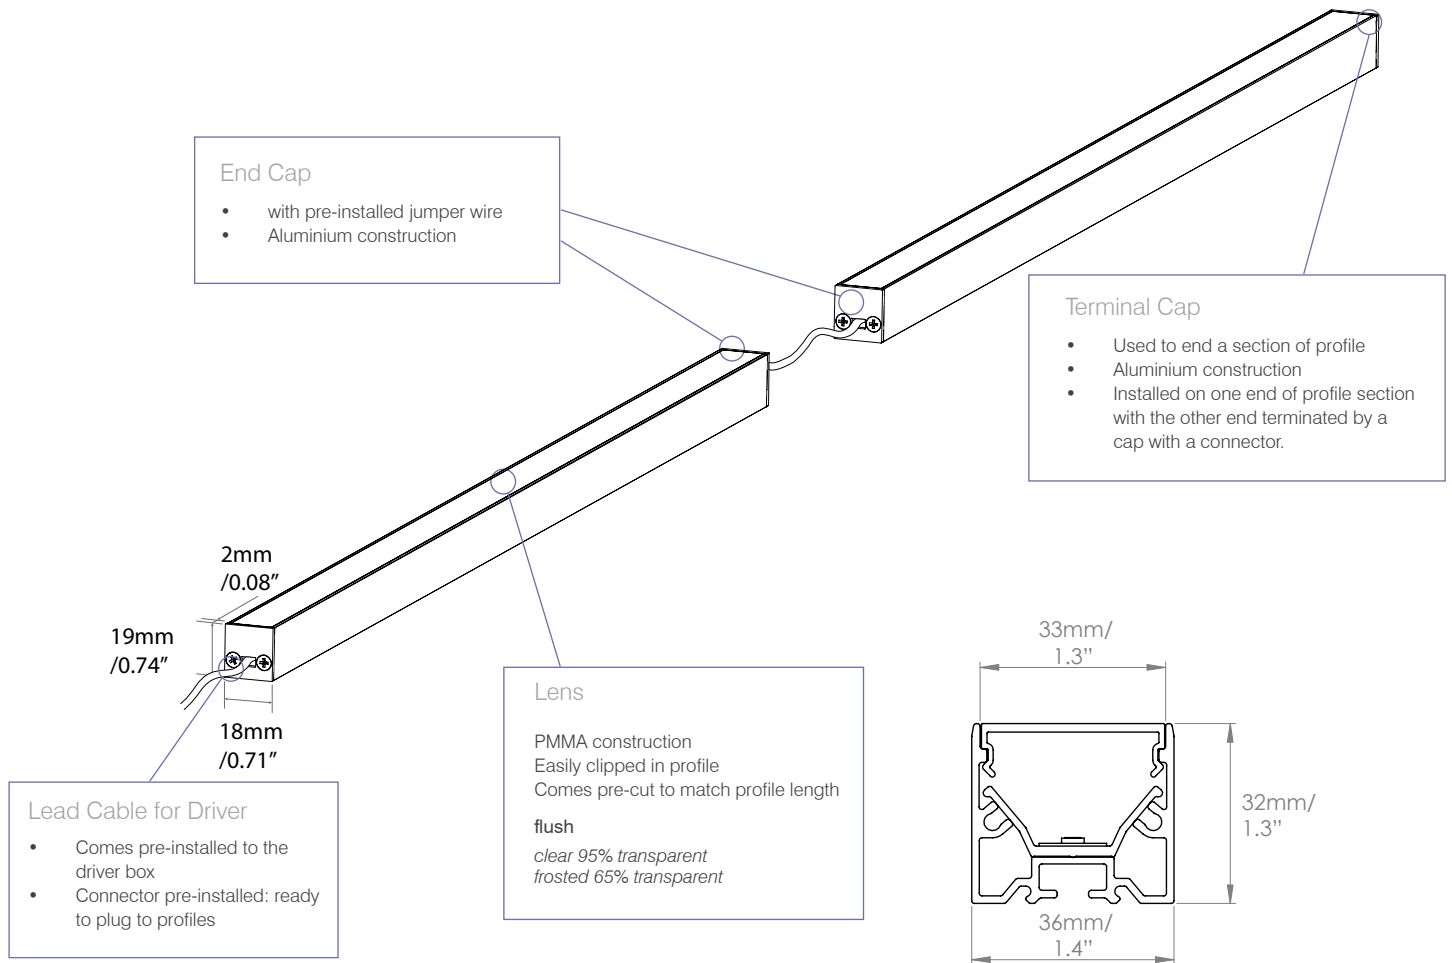

Straight Profile Connector

part number **565-115-15**


- Used to join two sections of Profiles together in a straight line.



Mounting Clip



part number **565-135-20**

- Steel construction
- Profile is mounted flush to surface
- Not visible once installed



Drivers for Dagger:

902 Standard series	Type		part number
non-dimmable	24V	10W	902-24010
	24V	25W	902-24025
	24V	60W	902-24060
	24V	80W	902-24080
	24V	96W	902-24096

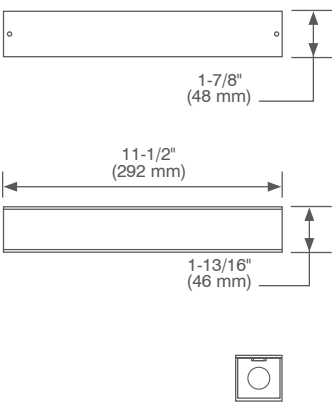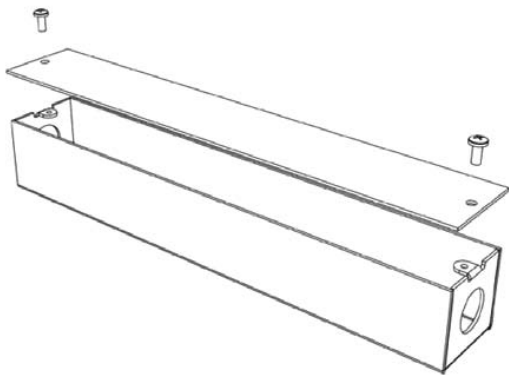

908 series	Type		part number
dimmable	24V	40W	908-24040
	24V	60W	908-24060
	24V	96W	908-24100

