

## Linear fixture

### SPECIFICATIONS

VESTA 1

Available in direct only or direct-indirect configuration

#### LENGTH

- available in standard length of 4', 8', 10' and 12', continuous custom length available on request

#### CONSTRUCTION

- Housing: Aluminium extrusion

#### LED

- Light Engine
- aluminium core PCB's
- 80+ CRI
- Seoul LED High efficacy up to 170 lumen/Watt
- 3 steps Mac Adam

#### LENS

- bottom: snap in diffusing lens
- top: slide in diffusing lens

#### FINISH

- powder coated in white, black or silver

#### MOUNTING

- suspended using aircraft cable. Fully height adjustable from ceiling


#### ELECTRICAL

- 120V LED included, power consumption:
- indirect: 3 W/ft
- direct: 6 W/ft

#### CONTROLS

- DALI 0-10V
- Lutron Eco system

#### DIMENSION

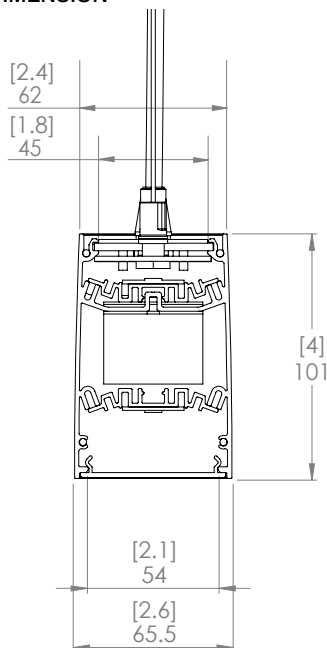

#### Please specify:

- MODEL** ☐ 355 – direct  
☐ 356 – direct & indirect
- COLOUR RENDERING INDEX** ☐ 580 – 80+
- LENGTH** ☐ 4 – 4'  
☐ 8 – 8'  
☐ 12 – 12'
- COLOUR TEMPERATURE** ☐ 30 – 3000K  
☐ 35 – 3500K  
☐ 40 – 4000K
- LENS** ☐ 25 – frosted symmetric
- FINISH** ☐ 01 – white  
☐ 02 – black  
☐ 08 – silver
- DIRECT LUMEN** ☐ 32 – 800/ft
- INDIRECT LUMEN** ☐ 17 – 410/ft
- DRIVER** ☐ STD – not dimmable  
☐ LCS – 0-10V control  
☐ ELDO – >0.1% dimming  
☐ LUT – lutron
- VOLTAGE** ☐ 120 – 120V  
☐ 277 – 277V  
☐ 347 – 347V

QUANTITY	PROJECT
NOTE	

