





DIMENSION

WITH SHIELD



WITHOUT SHIELD




wall washing LED linear fixture

SPECIFICATIONS

- Elegant wall washer with high lumen output for architectural illumination for in- and outdoor use
- Alignment seamlessly and shadowlessly, several luminaires operable with one controller
- 24V DC linear luminaire, equipped with CREE-Power LEDs in three lengths and two different white tones each with different beam angles available
- Anodized aluminium housing
- indoor: either with a straight plastic cover with and without glare shield
- Outdoor Wet-rated with high end grouting available, please refer to outdoor linear/lighting
- 5m cable included
- RGBW constant current 700mA

ACCESSORIES



Standard bracket

555-560-01


- for mounting in ceiling and floor
- distance to wall: 17mm



Cantilever arm (short)

555-560-02

- for mounting on walls
- distance to wall: 65mm,
- height: 57mm

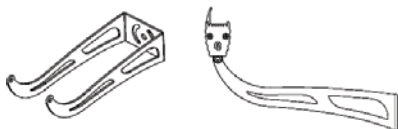

Cantilever arm (long)

555-560-03

- for mounting on walls
- distance to wall: 201mm,
- height: 82mm

Please specify:

- MODEL** ☐ **560** – indoor, no shield
☐ **561** – indoor, with shield
- ONE COLOUR CONFIG.** ☐ **762** – 336mm 24w/ RGB 501mm, 27w
☐ **763** – 666mm, 48w
☐ **764** – 966mm 72w/ RGB, 54w
- BEAM ANGLE** ☐ **610** – 17°
☐ **611** – 26°
☐ **612** – 36°
☐ **613** – 43°-16°
- COLOUR TEMPERATURE** ☐ **70** – 3000K
☐ **40** – 4000K
☐ **98** – RGB
☐ **99** – RGBW

typ. luminous:

	3000K	4000K		RGB		RGBW
24w	1500lm	1700lm	27w	1570lm	29.5w	1550lm
48w	3000lm	6400lm	54w	3140lm	59w	3100lm
72w	4500lm	5100lm			89w	4650lm

QUANTITY	PROJECT
NOTE	

